



Support Hangers


for Cable Tray, Pipe, Conduit, Light Fixtures and Other Heavy Equipment

Safer – Better – Faster

Eliminates climbing and working above trusses. Install in seconds while standing on deck below.

CAT#	UPPER CHORD
THUC 38	3/8" 1,200 lb Static Load Rating
THUC 50	1/2" 1,200 lb Static Load Rating

CAT#	LOWER CHORD
THLC 38	3/8" 1,200 lb Static Load Rating
THLC 50	1/2" 1,200 lb Static Load Rating

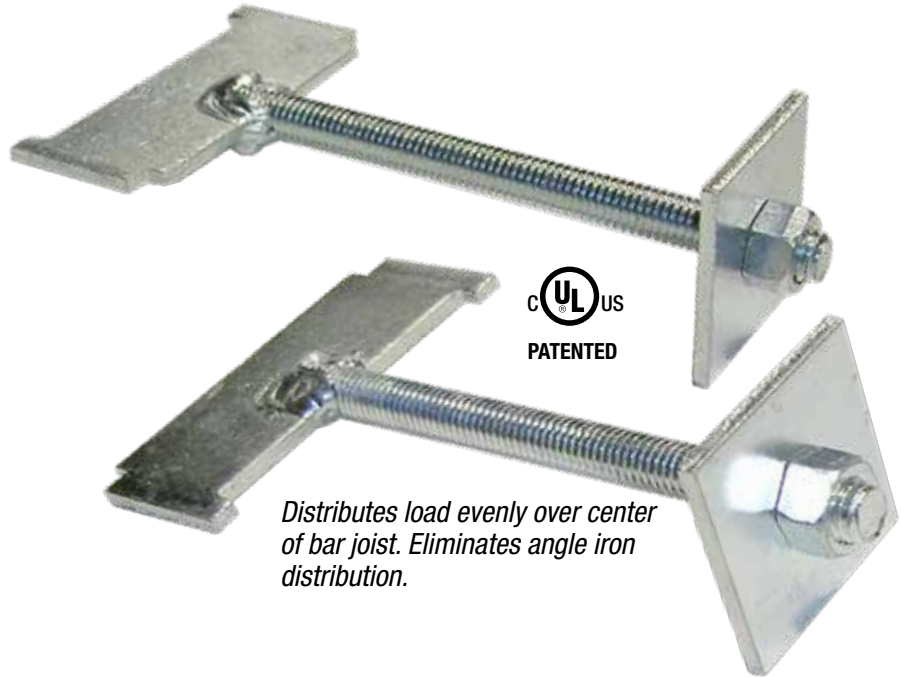

Distributes load evenly over center of bar joist. Eliminates angle iron distribution.



Attach a KLEVIS or other types of readily available hardware

CAT#	KEPS®
THW 38	3/8"
THW 50	1/2"



One piece KEPS® integrated nut/washer firmly locks into chord.

Provides rigid seismic restraint.

Seismic bracing not required when used in top chord applications (9.3.5.3.8 NFPA 13)

Meets UL 514A& CSA C22.2 No. 18.1

Suitable for Supporting Electrical, Fire Suppression, Plumbing, and HVAC Applications in Open Web Bar Joists

Customer must satisfy all codes and owners' specifications.



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP21