


Save More Time with a Perfectly Level Installation

“Big O” Flat



Box Support Bracket for Stud Walls

Flat version allows bracket to be slid left or right over face of studs for adjustment if necessary and installed with only 1 screw at each end plus enables boxes to be slid left or right to any location between studs.

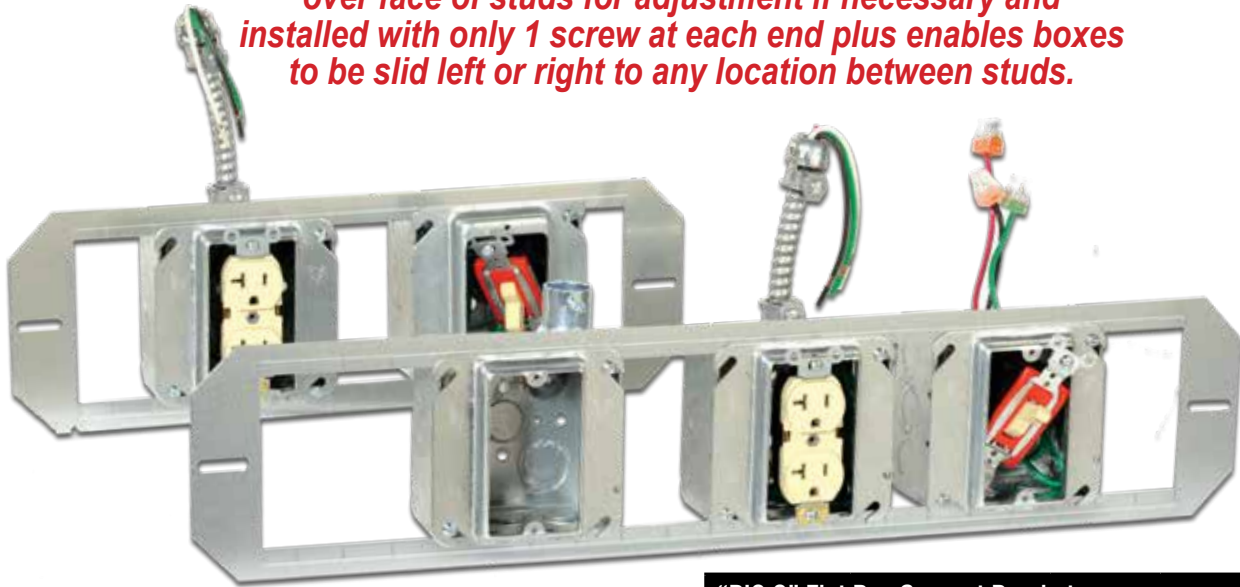

Extra strong 16 gauge galvanized or stainless steel to avoid bending or bowing during installation.

“BIG O” Flat Box Support Bracket 16 Gauge Galvanized or Stainless Steel			
CAT#	Description	Qty/Box	Weight
Big O-16F	16” Stud Spacing	50	22 lbs.
Big O-24F	24” Stud Spacing	50	35 lbs.

UL US
PATENT PENDING

- Extra strong 16 gauge galvanized or stainless steel to avoid bending or bowing during installation.
- Install **4", 4 11/16" and 5"** square boxes, then quickly slide left or right to any location between studs.
- Completely flat with NO 1/4" returns on top and bottom of entire width or 3/16" deep offsets at each end.



Mud Ring Sandwiches Box to Bracket

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC
Productivity and value thru ideas



PATENT PENDING
PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP26