

UL Listed Made in USA Quality Innovative Products That Help Do Jobs...

SAFER

NO WORKERS BELOW
PREVENTS INJURIES
OR DEATHS

BETTER

RATED AT 4,000 PSI
TENSILE STRENGTH
AT BREAK

**FASTER
OVER 12X
SPACERS
& CHAIRS**





Qwik Duct



HDPE CUSTOM TEMPLATES

In Any Configuration Required

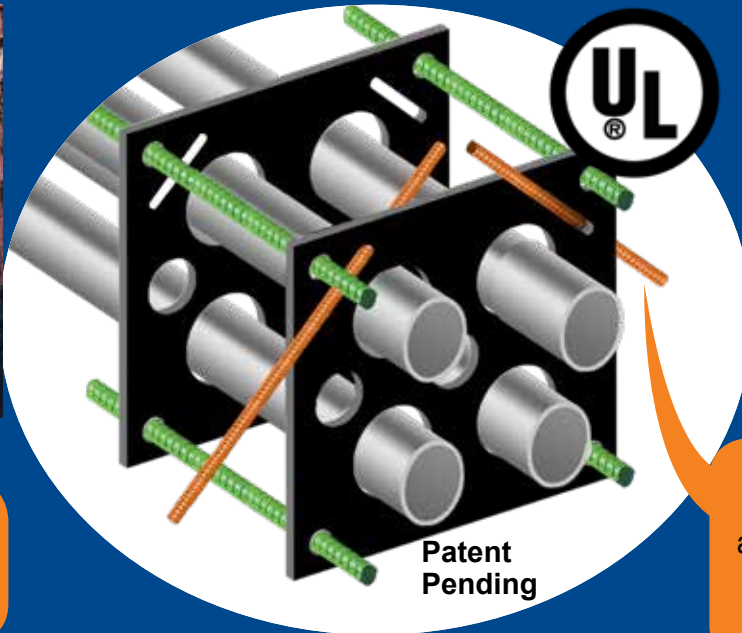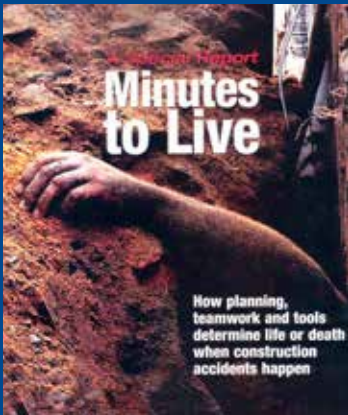

Eliminates time consuming strengthening weaker spacers & chairs with tie wire while above or down in the trench.

Patent Pending

When assembling above trench insert rods thru slots then lower assembled conduits and drive the rods into the trench walls from above to prevent floating during concrete pour.

Lowering Assembled Conduits From Above Allows Digging a Narrower Trench for Less: Excavation, Shoring (or none), Concrete and Backfill for Even Greater Savings

- Custom made in any size, shape, combination of conduit sizes and spacing between rebar & concrete flow thru holes, etc.
- White non-recycled virgin material also available. Doesn't qualify for LEED Credits.
- Customer must meet all codes & job specifications submit signed approved drawings before production begins
- 3/8" to 3/4" thick black recycled high density polyethylene. "May Qualify for LEED Credits".
- Non-Corrosive in concrete, slurry, sand & gravel.
- For PVC Schedule 40 and 80, EB, DB, Fiber Glass, PVC Coated or Galvanized Rigid Conduit.

ALSO SUITABLE FOR TRANSFORMER & SWITCHGEAR STUB UPS



PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP1