



Support Hangers

for Cable Tray, Pipe, Conduit, Light Fixtures and Other Heavy Equipment

Safer – Better – Faster

Eliminates climbing and working above trusses. Install in seconds while standing on deck below.

Upper Chord


THUC 38 = 3/8"
(1,200 lb. Static Load Rating)

THUC 50 = 1/2"
(1,200 lb. Static Load Rating)

Lower Chord

THLC 38 = 3/8"
(1,200 lb. Static Load Rating)

THLC 50 = 1/2"
(1,200 lb. Static Load Rating)

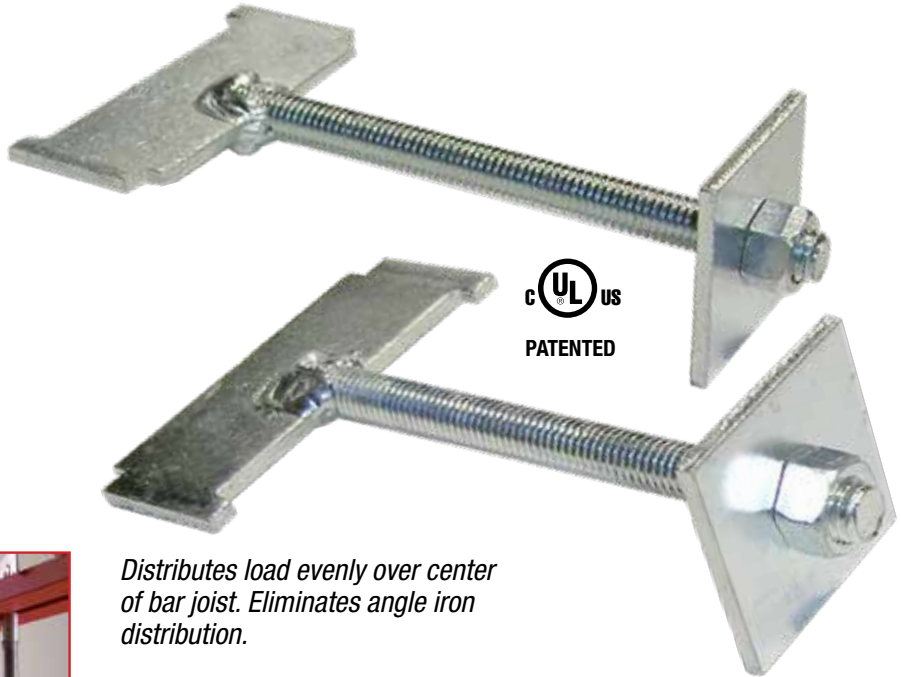

Distributes load evenly over center of bar joist. Eliminates angle iron distribution.



Attach a KLEVIS or other types of readily available hardware



THW 38 = 3/8"
THW 50 = 1/2"

One piece KEPS® integrated nut/washer firmly locks into chord.

Provides rigid seismic restraint.

Seismic bracing not required when used in top chord applications (9.3.5.3.8 NFPA 13)

Meets UL 514A& CSA C22.2 No. 18.1

Suitable for Supporting Electrical, Fire Suppression, Plumbing, and HVAC Applications in Open Web Bar Joists

Customer must satisfy all codes and owners' specifications.



**PATENT PENDING
PATENTED**



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP21