


"Big O" Flat



One slotted opening requires only 1 screw at each end when installing on studs.

Conduit and Box Supports for Stud Walls

Save More Time with a Perfectly Level Installation

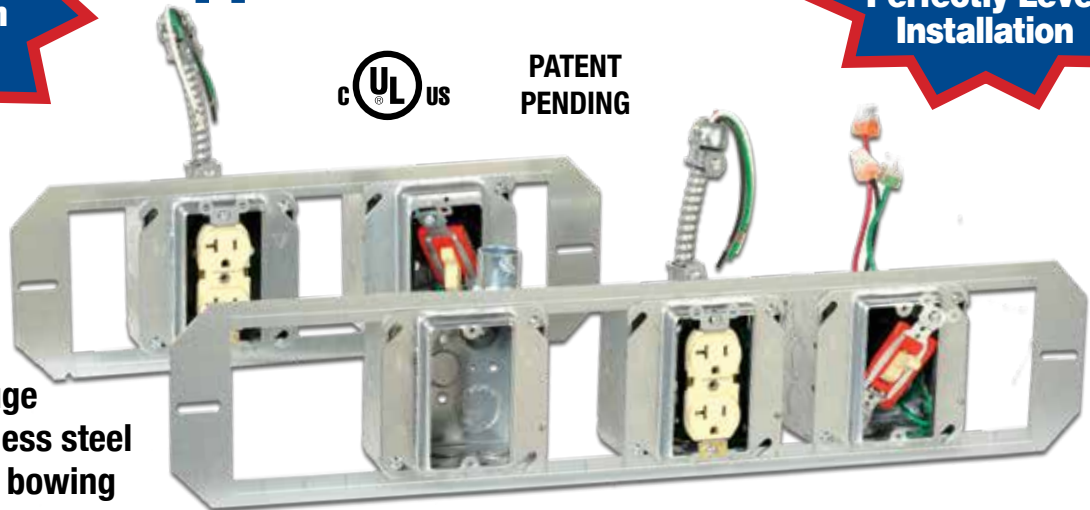

Extra strong 16 gauge galvanized or stainless steel to avoid bending or bowing during installation.

- Allows Flexibility... Just quickly slide bracket left or right and fasten to studs.
- Extra strong 16 gauge galvanized or stainless steel to avoid bending or bowing during installation.
- Install 4", 4 11/16" and 5" square boxes, then quickly slide left or right to any location between studs.
- Extra width at each end allows flexibility of movement to accommodate differences in stud spacing. Just slide Flat "Big O" left or right and fasten to studs.
- Completely flat with NO 1/4" returns on top and bottom of entire width or 3/16" deep offsets at each end.

Cat# BIG O-24F = 24"


Cat# BIG O-16F = 16"

Available Soon

Box Support Bracket for Low Voltage

Bracket allows supporting mudring only for low voltage applications

Cat# BOFB-LV

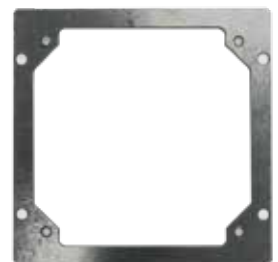

Mud Ring Sandwiches Box to Bracket

Customer must satisfy all codes and owners' specifications.



PATENT PENDING
PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP26