



Flat Fixed Position 1 & 2 Box Support Bracket

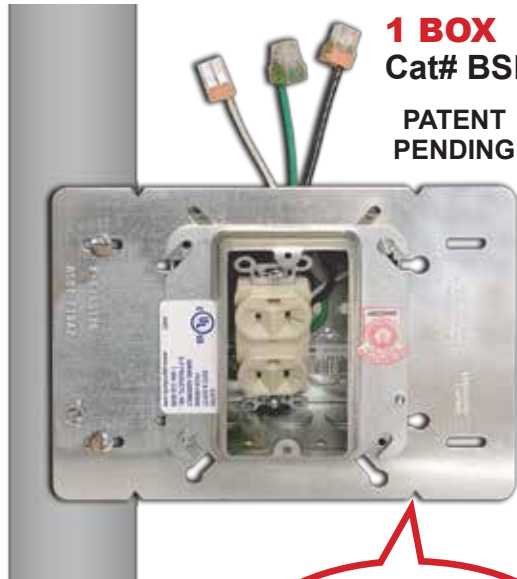

1 BOX
Cat# BSB-1FTD
PATENT PENDING 

Strong 16 gauge galvanized or stainless steel - no back box bracket required.

MOUNTING INSTRUCTIONS

Step 1 Align bracket center line to the stud height location required.

Step 2 Apply #8 self tapping screw pan head or Phillips to secure to stud on slots above and below slotted cross.


Step 3 Bracket can be loaded with 4", 4-¹¹/₁₆" and 5" square boxes and preassembled with boxes and mud rings required prior to installation (on stud) in prefab shop or on site.

Notches provided for easy alignment on stud

Tear drop shaped mounting holes allow fast & perfect installation of boxes without removing box screws

2 BOX
Cat# BSB-2FTD
= 16" Stud Spacing


PATENT PENDING

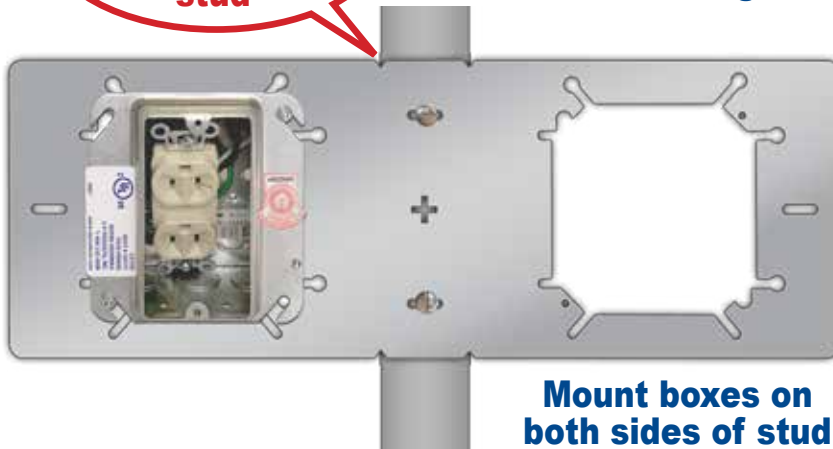

Openings allow installation of 4", 4¹¹/₁₆" & 5" square boxes and 4" Square Adjustable Mudrings

Mount boxes on both sides of stud

Mud Ring Sandwiches Box to Bracket

Available With or Without Adjustable Mud Rings

Customer must satisfy all codes and owners' specifications.

 **PRODUCTS, INC**
Productivity and value thru ideas



PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP28