


QwikDuct HDPE

CUSTOM QWIKDUCT TEMPLATE FEET

 PATENT PENDING

SNAP-ON TEMPLATE

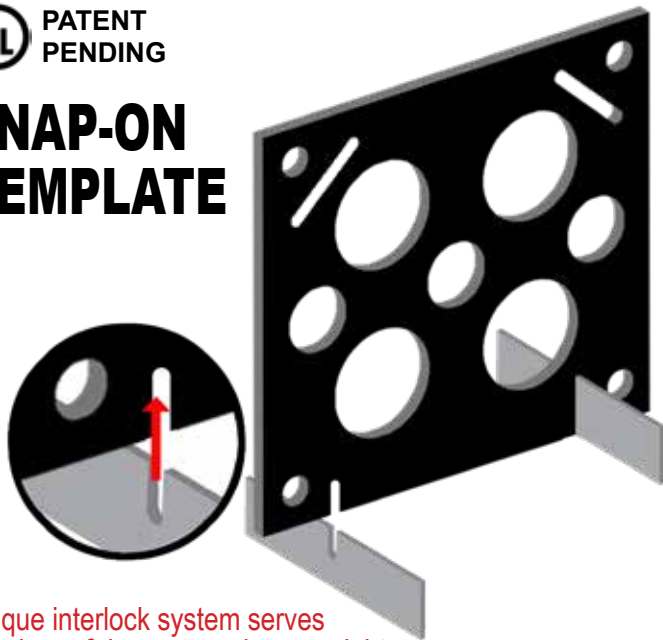


Unique interlock system serves as a base & keeps templates upright

Quickly apply glue if needed to keep feet in place when lowering

 PATENT PENDING

BOLT-ON TEMPLATE

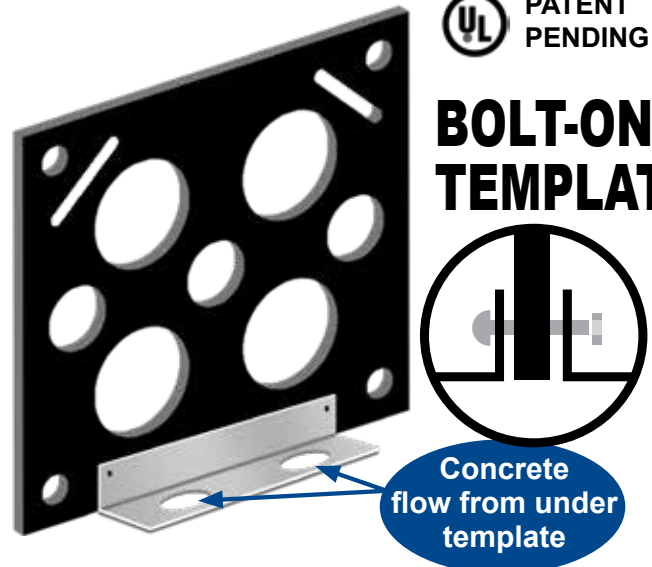

Customer must specify all details. Sold separately or installed by SP. Attach any length 2" Tall x Up thru 4" wide base, 16 gauge galvanized steel to bottom of templates.

Customer must allow air space to allow concrete flow under templates and feet.

Attach both angle irons with 2 bolts and nuts for each template during assembly on job site before lowering into trench

QWIKDUCT TEMPLATE HOLE SIZING GUIDE

Customer must make certain conduit openings are wide enough to allow the bell end of conduit to be fed thru from either direction.

SCHEDULE 40 PVC CONDUIT SIZE (Inches)												
1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	3 1/2	4	5	6	8
SUGGESTED DIAMETER OF CONDUIT HOLE (Inches) For Bell End Clearance												
1 1/4	1 1/2	2	2 1/4	2 1/2	3	3 1/2	4 1/4	5	5 1/4	6 1/4	7 1/2	9 3/4

NOTE: A MINIMUM OF 1/2 OF MATERIAL INCH MUST BE MAINTAINED BETWEEN CONDUIT AND ALL OPENINGS TO COMPLY WITH UL REQUIREMENTS.

Customer must satisfy all codes and owners' specifications.

 **PRODUCTS, INC**
Productivity and value thru ideas



PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007

P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595

E: info@spproducts.com • www.spproducts.com

IP3