



EZ Hangers in T Bar Ceilings

For Down Lites, Speakers, Exit Signs, etc.




Save over **20 MINUTES** per installation with a **PERFECT ALIGNMENT EVERY TIME!**

2B1 = 2 Foot (24" on Center) T Bar (Sold in Pairs)


4B1 = 4 Foot (48" on Center) T Bar (Sold in Pairs)




E180245

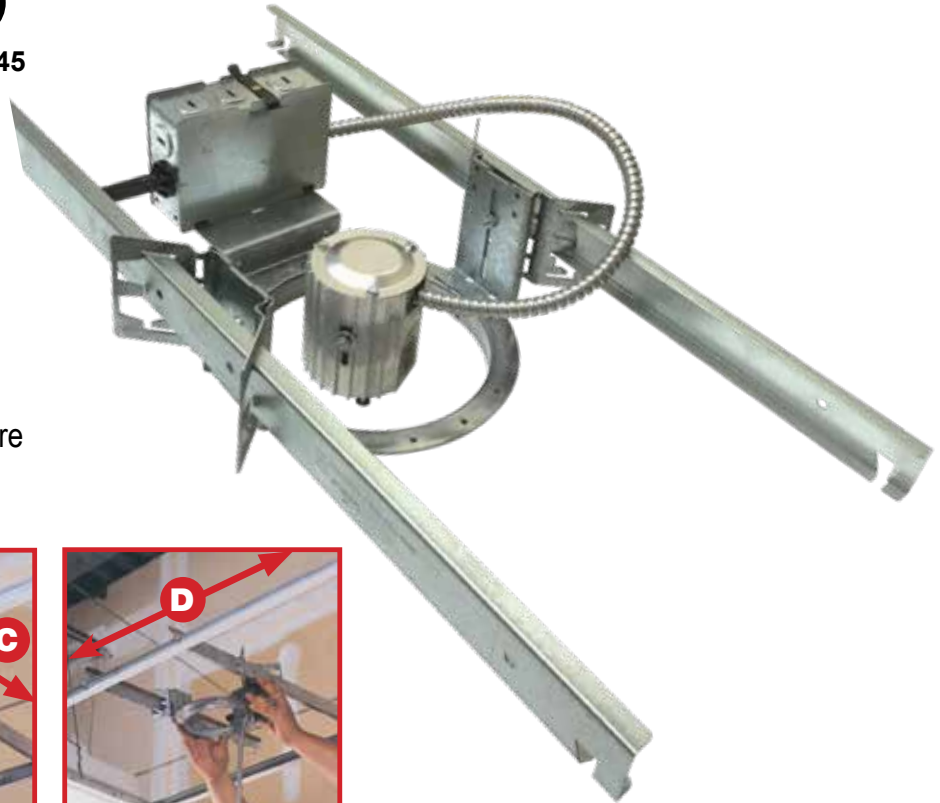

- Extremely strong 22 gauge galvanized steel with a 50 lb load rating.
- No extra parts to drop or lose.
- 2 mounting holes each 1-½ inch from center mark to quickly mount speakers or other devices in center of tile plus one at each end for supporting to structure independently of T Bar per IFFX Luminaire Fittings Standard.

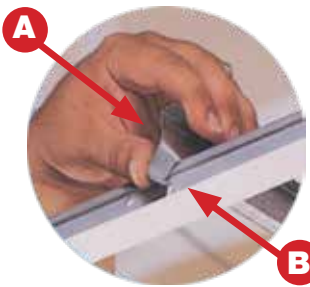

A Bend out tabs on ends of hangers

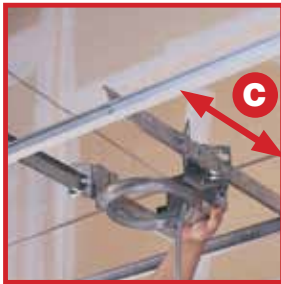

C Slide hangers with box or fixture housing attached along T Bar



D Slide fixture housing, boxes, etc. in other direction along hangers to location required

B Bend tabs in to lock in place

Eliminate Labor Intensive Cutting & Tying Down Lathers Channel, Black Iron, Conduit, etc.

Customer must satisfy all codes and owners' specifications.



PATENT PENDING
PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP32