

We're Proud to be the Electricians' Friend for Over 50 Years!



Support Brackets and

transition to RGB with

our transition couplings.

Beffer Faster

IP3b IP3c





PVC Offset Sizes 1/2" thru 6"

Meets Flexible Madrel Test Requirements




Bore Spacers

Sizes 1/2" thru 6" Roll assembled conduit into caissons and under obstructions










IP13a-p

PVC schedule 40 & 80

Transitions in Less Than



Conduit Than CONTO Patent Pending



IP3a

End Bell

Adapter

Schedule

40/80 PVC

Strut

PVC/Liquidtite

PVC/MC Cable PVC/EMT





PVC/Stainless







IP15 PVC Slip/Rigid

> 1 Piece **Reaming Bit** 1/2" thru 6" Schedule 40/80

Patent

Pending



(År) Patent PVC/PVC

Save Cost on the Rigid Nipple, Tape & Labor Use for Entire Job - Not Just for Repair

Plus More Being Invented for SAFER BETTER FASTER Jobs . . . Call With Your Ideas!

- To care for our country, industry and electricians by encouraging everyone to buy and install quality made in U.S.A. innovative products for SAFER – BETTER – FASTER jobs.
- **2.** Provide opportunity with fair compensation for current and future generations in this country.
- **3.** Develop and promote products that help accomplish these goals.
- **4.** Be the electricians' friend by providing them the satisfaction of making a valuable contribution to the industry plus receiving fair compensation for their ideas.
- **5.** Provide excellent quality and service with competitive pricing.

For more information, samples, literature, product meeting, quotation or to place an order call us. Also, if you have ideas for products we'll help you patent & market them plus pay you an excellent royalty.

Prefab & Quotation Mgr. mikelb@spproducts.com	Cell (815) 353-5500
Production Manager sureshp@spproducts.com	Cell (224) 659-3814
Vice President paulv@spproducts.com	Cell (815) 451-6335
Eastern Regional Mgr. gwombo@spproducts.com	Cell (443) 253-6142
Southeast Regional Mgr. r@rhoneycutt.com	Cell (828) 381-2395
Factory Area Sales mbarron@spproducts.com	Cell (312) 659-5972
Administration georgiak@spproducts.com	Office (800) 233-8595
Engineering/Quality Control thomasl@spproducts.com	Office (800) 233-8595
Warehouse Manager timg@spproducts.com	Office (800) 233-8595
Administrative Asst. asl@spproducts.com	Office (800) 233-8595
	mikelb@spproducts.com Production Manager sureshp@spproducts.com Vice President paulv@spproducts.com Eastern Regional Mgr. gwombo@spproducts.com Southeast Regional Mgr. r@rhoneycutt.com Factory Area Sales mbarron@spproducts.com Administration georgiak@spproducts.com Engineering/Quality Control thomasl@spproducts.com Warehouse Manager timg@spproducts.com Administrative Asst.

SP Products' philosophy and dedication to making valid contributions to the industry began with

"Econo Whips"

Originated in 1966...










..Our Whip Machine in 1969

- Any size, length, type steel or aluminum flexible conduit, MC Cable, Liquidtite, Cord Romex, etc. with any type connectors attached
- · Specify components required.
- · Conductors stripped
- · Locknuts secured rubber bands



...Plus Numbered and/or Lettered Bundled Wire for Power, Controls, Voice & Data in 1983





And 1997 Harnesses in Flexible Conduit

We Can Make an Unlimited Variety of Special Products to Help You Solve Problems to be Safer and More Profitable!







PATENT PENDING PATENTED



New Products =★ ★= New Products **Installed Product** Wire Assemblies 4-Conduit Threaded Block Support from Only One Rod IP19 EZ1-1a EZ Pull/EZ Read Home Runs, Networks, Round Robins, Full Boats 4-Conduit Non-Threaded Block Support from Only One Rod IP20 EZ Pull/EZ Read Wire Harnesses for Power, Controls and Voice & Data Box Support Rod Cubes from Only One Rod IP20a EZ3 **Pre-Wired Flexible Conduit** Support Hangers IP21 **THNN Outer Diameter Chart** EZ3a IP21a **Qwik Block Box Support** E7.4 Phase Wire Marker **Installed Products** Stub Up Slip Couplings IP22 IP1 **QwikDuct HDPE Template** Please visit our Original Cinch Clamp IP23 website for more IP24 IP2 Box Support Bracket for Fire Alarm, Speakers, Strobes, etc. **QwikDuct HDPE Template Order Info** innovative products Original "Big O" IP25 IP2a **QwikDuct Template HDPE Bore Spacers** constantly invented "Big O" Flat Box Support Bracket Application IP26 IP2b PVC Driver for Joining SCH 40/80 PVC Conduit by experienced IP26a "Big O" Flat Box Support Bracket Application IP2c-d **QwikDuct HDPE Template Applications** electricians. **QwikDuct HDPE Template Custom Feet Dual Wall Box Support Bracket** IP27 IP3 **Box Support Wall Bracket** IP27a IP3a **PVC End Bell Adapter** Electro Post EP-10 Box Support Bracket IP27b IP3b PVC Offset Couplings SCH 40 Only & Sizing Chart IP27c Conduit Plug with ID Tag and Hole for Pull String IP3c Male Threaded PVC Offset Couplings & Sizing Chart Flat Fixed Position 1-Box Support Bracket IP28 IP3d PVC Running Thread for PVC Conduit SCH 40/80 Flat Fixed Position 2-Box Bracket Support IP28a IP3e **HDPE PVC Conduit Guide** Flat Fixed Position 3-Box Bracket Support IP28b IP3f Long Slip PVC Coupling Flat Fixed Position 4-Box Bracket Support IP28c IP3g Long Slip Bell PVC Coupling to RGD **Custom Mounting Plates** IP29 IP4 **Split Steel Nuts Custom Mounting Plates (Continued)** IP29a IP5 "The Original" 2 Way Box Support Plate Slicknut Bushing Adapter for Pulling & Grounding Wire IP30 IP5a "The Original" 1/2 Box Support Plate Slicknut Bushing Adapter for Pulling Wire IP31 IP6 4-Way Box Support Plate EZ Hangers in T Bar Ceiling IP32 IP6a 2-Way Box Support Plate Mounting Brackets for EZ Hangers in T Bar Ceiling IP33 IP6b "Original" Round & Modified Round Box Support Plate Vertical, Ceiling Adjustable Bar Hanger Assembly **TP34** IP6c **Universal Round Box Support Plate Custom Engraved Nameplates and Labels** IP35 IP6d 2-Way w/Split Fingers Box Support Plate **Roof Top Blox Conduit Support** IP36 IP7 4-Way w/Split Fingers Box Support Plate 20" x 20" & 28" x 28" Junction Box Support Plate IP8 **Prefabricated Assemblies** IP8a **Grid System Junction Box Support Plate Custom Prefabricated Cables** PFA1 IP9 **Nylon Wrap-Around Conduit Straps Prefabricated Assemblies** PFA2 IP10 **EZ Stub-Up Support Bracket** Prefabricated Assemblies (Continued) PFA3 IP10a **EZ Stub-Up Support Bracket Adjustable Depth Mud Rings** PFA4 IP11 Trapeze Brackets 5 & 6 Holes Per Foot **Grounding Pigtails** PFA5 IP11a Trapeze Brackets 4 & 8 Conduits Vertical, Ceiling Adjustable Bar Hanger Assembly PFA6 IP11b Trapeze Brackets "Lay In" or "Feed Thru" for Larger Conduits Tools & Equipment IP11c Wide Bottom Flange & Custom Trapeze Brackets Snap On/Off Reusable Steel Protective Covers TE1 **★** IP12¹⁻² Transition Slip Couplings 40/80 PVC to: Galvanized Rigid; Flexible; Liquidtite; Aluminum; EMT; Rigid Pipe Joiner Stainless Steel; End Bell; Smooth Bushing; HDPE; Fiberglass Lamp Guard TE3 ★ IP13¹ Transition Couplings SCH 40/80 PVC to: PVC; EMT; Rigid; Flexible; Poly Foam Box Insert EMT Compression; Sealtite; Aluminum; Stainless Steel; End Bell Galvanized Rigid; Cut'N'Catch TE5 Smooth Bushing; Inside to PVC Inside; Threaded PVC; Tapered PVC Threaded; 1 Piece PVC Reaming Bit for SCH 40/80 PVC Conduits TE6 Slip PVC to Threaded PVC; MC Cable; PVC Reducer; End Bell to Galvanized Rigid; 1 Piece Chamfer Bit for SCH 40/80 PVC Conduits End Bell to EMT; End Bell to Liquidtite; End Bell to Flexible; Galvanized Rigid to PVC 1 Piece Chamfer Bit for Aluminum & Galvanized Rigid Conduit IP13² Transition Couplings SCH 40/80 Application **Live Panel Lockout Brackets** TE7 IP14 End Bell Adapter SCH 40/80 **Live Panel Temporary Covers** TE8 IP14a Threaded End Bell Adapter SCH 40/80 **Small Portable Cable Pullers** TE9 IP15 1 Piece PVC Reaming Bit for SCH 40/80 PVC Conduits **Anchor Bolt Template** TE10 IP15a 1 Piece Chamfer Bit for SCH 40/80 PVC Conduits Anchor Bolt Template Light Rail Jobs TE11 IP16 1 Piece Chamfer Bit for Aluminum Conduit **PVC Conduit Bender SEE WEBSITE** IP17 No Center Stop Slide On Coupling **Dry Wall Cut Out Templates** TE13 IP18 Box Brackets for Masonry Block Walls FOR INSTALLATION **PVC Driver** IP18a Adjustable Back Box Support **VIDEOS EMT Conduit Layout Tool** INDEX







PATENT PENDING PATENTED



EZ Pull – EZ Read

Home Runs, Networks Round Robins, Full Boats

SAFER - Set up only one reel. Approximately 50% of all home runs pulled on jobs throughout the year are common. Eliminates constantly handling and loading many heavy reels while installing the wire and again handling, hauling, and storing, partial reels of wire back at the shop at great expense.

Avoid expensive ringing out, tagging each conductor with costly markers that often are incorrect or fall off.

- Cross tape only with easy to remove tabs for faster easier pulling.
- Also, separate wires allow pulling individual wires in or out without removing entire harness.
- Conductors are easily added or removed later.
 Nylon lacing also available.
- Avoid expensive ringing out, tagging each conductor with costly markers that often are incorrect or fall off.
- · Every wire tested for quality.
- Extra footage to guarantee length.
- Quantity discounts and labor only orders (customer supplies all material other than SP proprietary items) available for greater savings.
- If manufacturers' brands are not specified equals will be supplied.
- Assemblies are UL Listed provided all components are UL.
- Labor only orders negotiated
- Certificates of insurance at no charge for pay outs when storing.
- Conductors carefully inspected for excellent quality plus reels properly marked & shipped flat or standing upright on skids for easier unloading & handling on job sites.
- 2500 foot reels from manufacturers often run short. Home runs will only be as long as shortest reel of the conductors involved plus some footage loss when striping or printing each conductor. Allowed for SP to order longer reels.











Catalog #	Description	Reel Size	lbs./ Reel				
#12 THHN Solid and Stranded							
HR 5C 12SOL 2500	5 Conductor #12 THHN Solid x 2500 foot Reel no wires printed or striped	22 w x 30 h	375				
HR 5C 12STR 2500	5 Conductor #12 THHN Stranded x 2500 foot Reel and same as above -or- x 2500 foot reel no wires printed or striped	22 w x 30 h	375				
HR 7C 12SOL 2500	7 Conductor #12 THHN Solid x 2500 foot Reel 3 Neutrals identified and plus 4 wires not printed or striped	22 w x 30 h	525				
HR 7C 12STR 2500	7 Conductor #12 THHN Stranded and same as above -or- x 2500 foot reel - 3 Neutrals identified and plus 4 wires not printed or striped	22 w x 30 h	525				
#10 THHN S	Solid and Stranded						
HR 5C 10SOL 2500	5 Conductor #10 THHN Solid x 2500 foot Reel no wires printed or striped	28 w x 36 h	600				
HR 5C 10STR 2500	5 Conductor #10 THHN Stranded same as above	28 w x 36 h	600				
HR 7C 10SOL 2500	7 Conductor #10 THHN Solid x 2500 foot Reel 3 Neutrals identified and plus 4 wires not printed or striped	28 w x 36 h	840				
HR 7C 10STR 2500	7 Conductor #10 THHN Stranded x 2500 foot Reel 3 Neutrals identified and plus 4 wires not printed or striped	28 w x 36 h	840				

Tell Us What You Need - We'll Make It!

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED





EZ Pull - EZ ReadWire Harnesses



CABLE



Striped or Numbered & Lettered Conductors



CIRCUIT SIZES

Eliminates Ringing Out & Tagging



LOW VOLTAGE

#18 thru #1/0 Gauge Wire: THHN, XHHW, XLP/USE, EPR HYPALON, etc. or equal size Cat 5 or 6, enhanced Cat 5 or 6 low voltage. Plus all other manufacturers brands and other types of wire including low voltage cables.

NOTE: We stongly recommend using water based pulling lubes when pulling silicon and other similar types of wire insulation which DO NOT allow our printing to properly adhere. In this case we can make wire markers with any nomenclature required and apply them at any location of the harnesses on the conductors per customers specification.

Set Up and Pull Off 1 Reel – Eliminates Wire Pulling Equipment

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



EZ2

EZ Pull - EZ Read



Pre-Wired Flexible Conduit Custom Assemblies



We invented and introduced these products to the electrical industry in 1981, 1991 & 1997

- Up thru 200 foot long lengths any type of wire or cable, including: fibre optic, in any type of flexible steel or aluminum, liquidtight, ENT, NMLT, etc. conduit.
 - NOTE: Low voltage and power cable should not be combined.
- Conductors printed with any combination of numbers, letters or symbols repeated every half inch along their length.
- Any color PVC jacket and thicknesses available for greater protection in wet locations, corrosive areas or embedding in concrete.
- Quantity discounts, labor only orders (customer supplies wire) and firm price blanket orders available.
- If manufacturers' brands are not specified equals will be supplied.

SAFER - BETTER - FASTER PV Cable Harnesses Also Available for Solar & Wind Farms









PATENT PENDING PATENTED



THHN Copper Harnesses Appoximate Outer Diameters

Wire	Single	NUMBER OF CONDUCTORS (Size shown in inches)									
Size	OD	3	4	5	6	7	19	37	61	91	127
18	0.096	0.192	0.221	0.288	0.288	0.288	0.480	0.672	0.86	1.060	1.248
16	0.106	0.212	0.244	0.318	0.318	0.318	0.530	0.742	0.954	1.166	1.378
14	0.112	0.244	0.258	0.336	0.336	0.336	0.560	0.784	1.008	1.323	1.456
12	0.131	0.262	0.302	0.393	0.393	0.393	0.655	0.917	1.179	1.441	1.703
10	0.165	.0330	0.380	0.495	0.495	0.495	0.825	1.155	1.485	1.815	2.145
8	0.218	0.436	0.502	0.654	0.654	0.654	1.090	1.526	1.962	1.962	2.834
6	0.257	0.514	0.591	0.771	0.771	0.771	1.285	1.800	2.313	2.830	3.341
4	0.328	0.656	0.755	0.984	0.984	0.984	1.640	2.300			
3	0.356	0.710	0.820	1.070	1.070	1.070	1.780	2.490			
2	0.388	0.780	0.890	1.160	1.160	1.160	1.940	2.270			
1	0.450	0.900	1.040	1.350	1.350	1.350	2.250	3.150			
1/0	0.491	0.980	1.130	1.470	1.470	1.470	2.460				
2/0	0.537	1.070	1.240	1.610	1.610	1.610	2.690				
3/0	0.588	1.180	1.350	1.760	1.760	1.760	2.940				
4/0	0.646	1.290	1.490	1.940	1.940	1.940	3.230				
Num of La		2	3	3	3	3	5	7	9	11	13

PRE-WIRED FLEXIBLE CONDUIT ASSEMBLIES DO NOT MEET MC CABLE SPECIFICATIONS PER THE NATIONAL ELECTRIC CODE AND DO NOT HAVE FILLERS OR ANY TYPE WRAPPING AROUND CONDUCTORS WITHIN THE FLEXIBLE CONDUIT.

SAFER – BETTER – FASTER

Customer is responsible to ensure Wire Harnesses meet all codes plus owners' and specifying engineers' requirements.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



Phase Wire Marker



Cat# (specify color)	Desc.
PWM100	Regular Tip
PWM200	Wide Tip

• Fast drying (in just 30 seconds) paint resists handling, heat and UV Light plus adheres to clean sheath permanently

 Lasts for 1 year fom date of purchase provided tube is immediately & properly capped after each use

• EACH TUBE CAN MARK MORE THAN 600 LINEAR FEET OF WIRE

 Ideal for Panels, Color Coding and identifying Wiring Circuits, Cat 5 Ethernet plus audio/video and HDMI Cable, Automotive Wire, etc.

Wider Tip for Larger Wires



Available in the following colors:

B = Black

BL = Blue

BRN = Brown

GRN = Green

GR = Gray

O = Orange

P = Pink

R = Red

V = Violet

W = White

Y = Yellow

Save Hundreds of dollars per tube









PATENT PENDING PATENTED



That Help Do Jobs...

SAFER

NO WORKERS BELOW PREVENTS INJURIES OR DEATHS

BETTER

RATED AT 4.000 PSI **TENSILE STRENGTH** AT BREAK

OVER 12X THAN SPACERS & CHAIRS



HDPE CUSTOM TEMPLATES


Patent Pending



Eliminates dangerous & expensive time working in trench strengthening weak spacers & chairs with tie wire or other methods.

Lowering assembled conduit from above allows other savings - Digging a narrower trench for less excavation, concrete or slurry, shoring and backfill. The savings



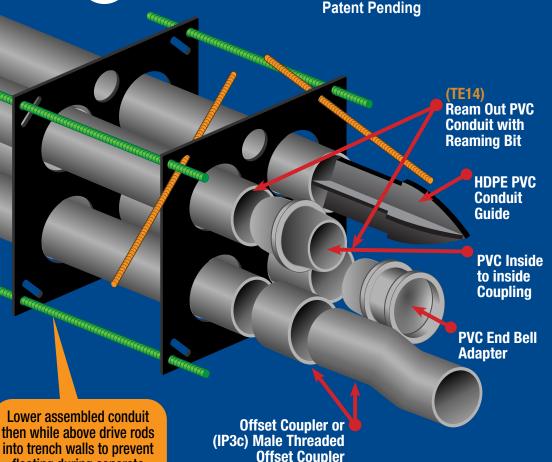

ALSO SUITABLE FOR TRANSFORMER & SWITCHGEAR STUB UPS

Submittals provided with all duct bank quotes



floating during concrete or slurry pour.







PATENT PENDING **PATENTED**



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



QwikDuct HDPE a



CUSTOM TEMPLATES

WHEN ORDERING CUSTOMER MUST SPECIFY:


- 1. Material Thickness 3/8", 1/2", 3/4" and Load Rating Required (1/2" & 3/4" are special order materials)
- 2. Size & Location of Rebar Holes
- 3. Spacing Between Conduit Openings
- 4. Rebar Stake Down Slots Required?
- 5. Diameter of Conduits
- 6. Footage Between Templates
- 7. Size & Location of Concrete Flow Holes

WHEN ASSEMBLING ABOVE THE TRENCH:

- 1. Install Conduits into Templates & Rebar if Required
- 2. Lower Assemblies into Trench
- 3. Insert Stake Down Rods into Angled Slots
- 4. Drive Stake Down Rods into Trench Walls from Above
- 5. Backfill with Concrete, Slurry, Sand or Gravel etc.



QwikDuct Templates can be used with all standardized trade size conduit specified per NFPA 70 NEC

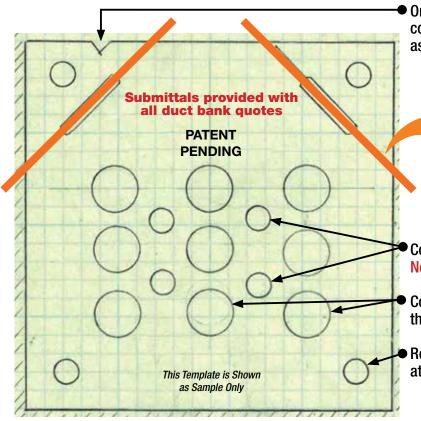

Orientation notch for fast. correct alignment during assembly above trench.

> Workers insert rods thru angled slots and drive rods into trench walls from above to prevent floating during concrete pour.

OWIKDUCT HDPE CUSTOM **TEMPLATES** meet or exceed **US Army Corps of Engineers** requirement.

Customer must specify larger diameter holes to enable feeding bell ends of conduit from either direction.

Concrete flow thru holes.

Note: specify size and location.

Conduit Holes Larger than Conduit OD (see IP3)

Rebar holes available at locations specified

PROVIDE SAFER & FASTER INSTALLATION PLUS ALLOW CLOSING TRENCH QUICKER TO **REDUCE CHANCE OF** DANGEROUS & COST **SOIL OR WATER PROBLEMS**

ALSO SUITABLE FOR TRANSFORMER & SWITCHGEAR STUB UPS









PATENT PENDING PATENTED



QwikDuct HDPE Bore Spacers





3/4" HDPE for Greater Strength to Accommodate Assemblies with Wheels.

2" Diameter Wheels are Standard, Larger Size Diameters Available Upon Request

Roll assembled conduit into caissons under obstructions.

WHEN ORDERING CUSTOMER MUST SPECIFY:

- 1. Material Thickness 3/8", 1/2", 3/4" and Load Rating Required (1/2" & 3/4" are special order materials)
- 2. Size & Location of Rebar Holes
- 3. Spacing Between Conduit Openings
- 4. Rebar Stake Down Slots Required?
- 5. Diameter of Conduits
- 6. Footage Between Templates
- 7. Size & Location of Concrete Flow Holes
- 8. Size, Number & Location of Wheels

Customer must specify larger diameter holes to enable feeding bell ends of conduit from either direction.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

PVC Conduit PVC Conduit



PVC Conduit

Assemble PVC conduits in a Duct Bank on a job site or prefab using the PVC Driver with a Hammer Drill to join 2 pieces of PVC conduit in a matter of seconds.

Catalog #	SCH 40/80 PVC Conduit Size
PVCD-100-125-150	1", 1-1/4" & 1-1/2"
PVCD-200-250-300	2", 2-1/2" & 3"
PVCD-350-400	3-1/2″ & 4"
PVCD-500	5"
PVCD-600	6"
PVCD-800	8"



Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



QwikDuct HDPE CUSTOM TEMPLATES









Please visit spproducts.com to see video IP1 & IP2

Do Jobs SAFER BETTER FASTER! Earn More Profit!

It took two men a full day to assemble the first 20 feet. It required 15 3½" conduits and one 2½" conduit to turn up for a tap box, a few feet away, two of the 3½" and one of the 2½" had to turn up to go in to separate CT cabinets and then turn back down to continue the full length.

On the day of trenching we just moved this section over, and it took four men 4 hours to assemble the remainder of the run. It should take another 12 man hours to make the connection between the 16 conduits the existing stubs out of the building.

Ideal for stubbing up for Transformers & Switch Gear

QWIK DUCT Templates can be used with all standardized trade size conduit specified per NFPA 70 NEC

FREE SPECIAL OFFER!

Contractor customer earns \$1,000 worth of any size 1 Piece Reaming Bits for every \$100,000 purchases of any of SP's products based on their contractor's cost within a 12 month period starting with the date of 1st order of program.

To qualify contractor customer must accept this offer with a dated, signed agreement properly recorded and filed by SP Products and contractor must renew the agreement at the end of every year if he chooses to continue the program.

IMPORTANT!

- Customer is responsible for meeting all specifications on the job and must inform SP if heavier than schedule 80 PVC conduit is installed.
- For heavier loads (steel, rigid, EMT or other heavier conduit) we strongly suggest customer installs rebar on outside perimeter to transfer the load away from the templates.
- Customer is also responsible for calculating and meeting all load bearing specifications.
- Heavier conduit should be fed thru the lower openings in the template if otherwise SP must be informed prior to installation.











PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE


730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP2c-d

QwikDuct HDPE




CUSTOM QWIKDUCT TEMPLATE FEET

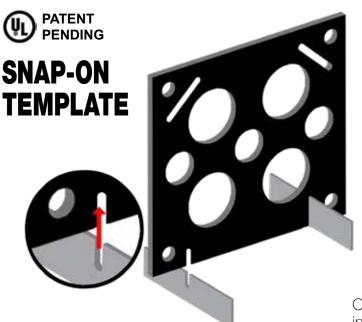

Unique interlock system serves as a base & keeps templates upright

Quickly apply glue if needed to keep feet in place when lowering

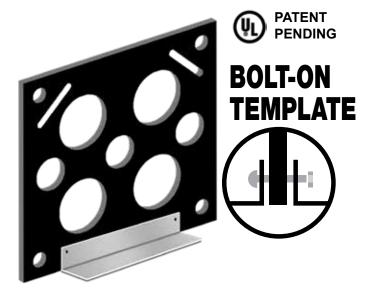

Customer must specify all details. Sold separately or installed by SP. Attach any length 2" tall x up thru 4" wide base, 16 gauge galvanized steel to bottom of templates.

Customer must allow air space to allow concrete flow under templates and feet.

Attach both angle irons with 2 bolts and nuts for each template during assembly on job site before lowering into trench

QWIKDUCT TEMPLATE HOLE SIZING GUIDE

Customer must make certain conduit openings are wide enough to allow the bell end of conduit to be fed thru from either direction if required by specs.

SCH	SCHEDULE 40 PVC CONDUIT SIZE (Inches)											
1/2	3/4	1	11/4	11/2	2	21/2	3	3½	4	5	6	8
	SUGGESTED DIAMETER OF CONDUIT HOLE (Inches) For Bell End Clearance											
11/4	11/2	2	21/4	21/2	3	31/2	41/4	5	51/4	61/4	71/2	93/4

NOTE: A MINIMUM OF $1\frac{1}{2}$ OF MATERIAL INCH MUST BE MAINTAINED BETWEEN CONDUIT AND ALL OPENINGS TO COMPLY WITH UL REQUIREMENTS.

Customer must satisfy all codes and owners' specifications.










PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

PVC End Bell Adapter

Sizes 1/2" thru 6"

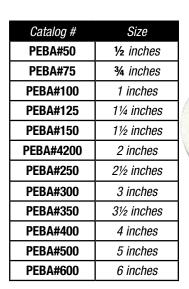


All Above Meet UL651 Plus... CSA C22.2, No. 85 and US Army Corps Engineers Specifications




Transitions in Less Than 5 Minutes!

Save Cost on the Rigid Nipple, Tape & Labor
Use for Entire Job - Not Just for Repair


Perfect for use with QwikDuct HDPE Templates for Railway, Highway & Tollway



1. Align QwikDuct close to manhole or vault



Ream out conduits and glue on end bell adapters to each conduit inside or outside manhole or vault



3. Slide conduits with bell end adapters thru manhole openings inside or outside manhole or vault







PATENT PENDING PATENTED





PVC Offset Couplings







 PVC Offset used to join conduits when they shift due to stress of concrete pour

Save


at Least

Installation.

 Offset facilitates ease of installation without need to chip out concrete

> **OFFSET COUPLINGS MEET MANDREL TEST REQUIREMENTS**

> > **PATENT PENDING**

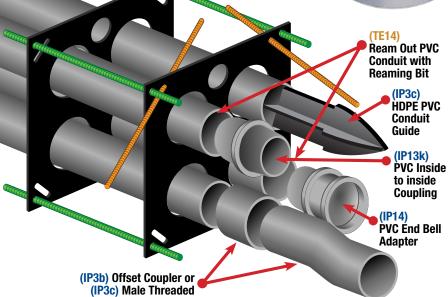

Conduit Sizes 1/2" thru 6" **Offset Sizing Chart & Catalog Numbers**

Size	Offset	Cat #
1/2"	1/2"	50-PVC-OFFSET 50
	3/4"	50-PVC-0FFSET 75
İ	1"	50-PVC-0FFSET 100
	1-1/4"	50-PVC-0FFSET 125
İ	1-1/2"	50-PVC-0FFSET 150
	2"	50-PVC-0FFSET 200
İ	3"	50-PVC-0FFSET 300
3/4"	1/2"	75-PVC-0FFSET 50
	3/4"	75-PVC-0FFSET 75
	1"	75-PVC-0FFSET 100
	1-1/4"	75-PVC-0FFSET 125
	1-1/2"	75-PVC-0FFSET 150
	2"	75-PVC-0FFSET 200
	3"	75-PVC-0FFSET 300
1"	1/2"	100-PVC-0FFSET 50
	3/4"	100-PVC-0FFSET 75
	1"	100-PVC-0FFSET 100
	1-1/4''''	100-PVC-0FFSET 125
	1-1/2"	100-PVC-0FFSET 150
	2"	100-PVC-0FFSET 200
	3"	100-PVC-0FFSET 300
1-1/4"	1/2"	125-PVC-0FFSET 50
	3/4"	125-PVC-0FFSET 75
	1"	125-PVC-0FFSET 100
	1-1/4"	125-PVC-0FFSET 125
	1-1/2"	125-PVC-0FFSET 150
	2"	125-PVC-0FFSET 200
	3"	125-PVC-0FFSET 300
1-1/2"	1/2"	150-PVC-0FFSET 50
	3/4"	150-PVC-0FFSET 75
	1"	150-PVC-0FFSET 100
	1-1/4"	150-PVC-0FFSET 125
	1-1/2"	150-PVC-0FFSET 150
	2"	150-PVC-0FFSET 200
	3"	150-PVC-0FFSET 300
2"	1/2"	200-PVC-0FFSET 50
	3/4"	200-PVC-0FFSET 75
	1"	200-PVC-0FFSET 100
	1-1/4"	200-PVC-0FFSET 125
	1-1/2"	200-PVC-0FFSET 150
	2"	200-PVC-0FFSET 200
	3"	200-PVC-0FFSET 300

Size	Offset	Cat #
3"	1/2"	300-PVC-0FFSET 50
	3/4"	300-PVC-0FFSET 75
	1"	300-PVC-0FFSET 100
	1-1/4''''	300-PVC-0FFSET 125
	1-1/2"	300-PVC-0FFSET 150
	2"	300-PVC-0FFSET 200
	3"	300-PVC-0FFSET 300
3-1/2"	1/2"	350-PVC-0FFSET 50
	3/4"	350-PVC-0FFSET 75
	1"	350-PVC-0FFSET 100
	1-1/4"	350-PVC-0FFSET 125
	1-1/2"	350-PVC-0FFSET 150
	2"	350-PVC-0FFSET 200
	3"	350-PVC-0FFSET 300
4"	1/2"	400-PVC-0FFSET 50
	3/4"	400-PVC-0FFSET 75
	1"	400-PVC-0FFSET 100
	1-1/4''''	400-PVC-0FFSET 125
	1-1/2"	400-PVC-0FFSET 150
	2"	400-PVC-0FFSET 200
	3"	400-PVC-0FFSET 300
5"	1/2"	500-PVC-0FFSET 50
	3/4"	500-PVC-0FFSET 75
	1"	500-PVC-0FFSET 100
	1-1/4'''	500-PVC-0FFSET 125
	1-1/2"	500-PVC-0FFSET 150
	2"	500-PVC-0FFSET 200
	3"	500-PVC-0FFSET 300
6"	1/2"	600-PVC-0FFSET 50
	3/4"	600-PVC-0FFSET 75
	1"	600-PVC-0FFSET 100
	1-1/4"	600-PVC-0FFSET 125
	1-1/2"	600-PVC-0FFSET 150
	2"	600-PVC-0FFSET 200
	3"	600-PVC-0FFSET 300

QwikDuct Templates can be used with all standardized trade size conduit specified per NFPA 70 NEC



Offset Coupler







PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

Male Threaded PVC Offset



Schedule 40 ONLY




 PVC Offset used to join conduits when they shift due to stress of concrete pour

 Offset facilitates ease of installation without need to chip out concrete

OFFSET COUPLINGS MEET MANDREL TEST REQUIREMENTS

> PATENT PENDING

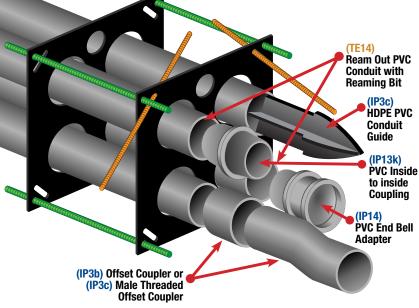

Conduit Sizes 1/2" thru 6" Offset Sizing Chart & Catalog Numbers

Size	Offset	Cat #
1/2"	1/2"	50-PVC-0FFSET-THR 50
	3/4"	50-PVC-0FFSET-THR 75
	1"	50-PVC-0FFSET-THR 100
	1-1/4"	50-PVC-0FFSET-THR 125
	1-1/2"	50-PVC-0FFSET-THR 150
	2"	50-PVC-0FFSET-THR 200
	3"	50-PVC-0FFSET-THR 300
3/4"	1/2"	75-PVC-0FFSET-THR 50
	3/4"	75-PVC-0FFSET-THR 75
	1"	75-PVC-0FFSET-THR 100
	1-1/4"	75-PVC-0FFSET-THR 125
	1-1/2"	75-PVC-0FFSET-THR 150
	2"	75-PVC-0FFSET-THR 200
	3"	75-PVC-0FFSET-THR 300
1"	1/2"	100-PVC-0FFSET-THR 50
	3/4"	100-PVC-0FFSET-THR 75
	1"	100-PVC-OFFSET-THR 100
	1-1/4''''	100-PVC-OFFSET-THR 125
	1-1/2"	100-PVC-0FFSET-THR 150
	2"	100-PVC-0FFSET-THR 200
	3"	100-PVC-0FFSET-THR 300
1-1/4"	1/2"	125-PVC-0FFSET-THR 50
	3/4"	125-PVC-0FFSET-THR 75
	1"	125-PVC-0FFSET-THR 100
	1-1/4"	125-PVC-OFFSET-THR 125
	1-1/2"	125-PVC-0FFSET -THR150
	2"	125-PVC-0FFSET-THR 200
	3"	125-PVC-0FFSET-THR 300
1-1/2"	1/2"	150-PVC-0FFSET-THR 50
	3/4"	150-PVC-0FFSET-THR 75
	1"	150-PVC-OFFSET-THR 100
	1-1/4"	150-PVC-0FFSET-THR 125
	1-1/2"	150-PVC-0FFSET-THR 150
	2"	150-PVC-0FFSET-THR 200
	3"	150-PVC-0FFSET-THR 300
2"	1/2"	200-PVC-0FFSET-THR 50
	3/4"	200-PVC-0FFSET-THR 75
	1"	200-PVC-0FFSET -THR100
	1-1/4"	200-PVC-0FFSET-THR 125
	1-1/2"	200-PVC-0FFSET-THR 150
	2"	200-PVC-0FFSET-THR 200
	3"	200-PVC-0FFSET-THR 300

	3"	1/2"	000 DUO 055055 TUE
	l i		300-PVC-0FFSET-THR 50
		3/4"	300-PVC-0FFSET-THR 75
7		1"	300-PVC-0FFSET-THR 100
71		1-1/4''''	300-PVC-0FFSET-THR 125
		1-1/2"	300-PVC-0FFSET-THR 150
1		2"	300-PVC-0FFSET-THR 200
		3"	300-PVC-0FFSET-THR 300
1	3-1/2"	1/2"	350-PVC-0FFSET-THR 50
1		3/4"	350-PVC-0FFSET-THR 75
		1"	350-PVC-0FFSET-THR 100
1		1-1/4"	350-PVC-0FFSET-THR 125
		1-1/2"	350-PVC-OFFSET-THR 150
		2"	350-PVC-OFFSET-THR 200
		3"	350-PVC-OFFSET-THR 300
	4"	1/2"	400-PVC-OFFSET-THR 50
1		3/4"	400-PVC-OFFSET-THR 75
		1"	400-PVC-0FFSET-THR 100
		1-1/4"	400-PVC-0FFSET-THR 125
		1-1/2"	400-PVC-0FFSET-THR 150
		2"	400-PVC-0FFSET-THR 200
		3"	400-PVC-OFFSET-THR 300
	5"	1/2"	500-PVC-0FFSET-THR 50
		3/4"	500-PVC-0FFSET-THR 75
1		1"	500-PVC-0FFSET-THR 100
1		1-1/4''''	500-PVC-0FFSET-THR 125
1		1-1/2"	500-PVC-0FFSET-THR 150
		2"	500-PVC-0FFSET-THR 200
1		3"	500-PVC-0FFSET-THR 300
1	6"	1/2"	600-PVC-0FFSET-THR 50
		3/4"	600-PVC-0FFSET-THR 75
		1"	600-PVC-0FFSET-THR 100
		1-1/4"	600-PVC-OFFSET-THR 125
		1-1/2"	600-PVC-0FFSET-THR 150
		2"	600-PVC-0FFSET-THR 200
		3"	600-PVC-0FFSET-THR 300
]			

QwikDuct Templates can be used with all standardized trade size conduit specified per NFPA 70 NEC









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

PVC



Running Thread for PVC Conduit SCH 40/80



Patent Pending

- Any size Running Thread PVC Conduit SCH 40/80 up to 30 inches in length for 1/2" thru 6" conduit
- Use with PVC Female adapter or locknut for any type of conduit application
- Or order several 30" PVC Running Thread Conduits and cut to desired length on the jobsite

SIZE	LENGTH	CATALOG #
1/2"	Specify	PVN-50-40
3/4"	Specify	PVN-75-40
1"	Specify	PVN-100-40
1-1/4"	Specify	PVN-125-40
1-1/2"	Specify	PVN-150-40
2"	Specify	PVN-200-40
3"	Specify	PVN-300-40
3-1/2"	Specify	PVN-350-40
4"	Specify	PVN-400-40
5"	Specify	PVN-500-40
6"	Specify	PVN-600-40



SIZE	LENGTH	CATALOG #
1/2"	Specify	PVN-50-80
3/4"	Specify	PVN-75-80
1"	Specify	PVN-100-80
1-1/4"	Specify	PVN-125-80
1-1/2"	Specify	PVN-150-80
2"	Specify	PVN-200-80
3"	Specify	PVN-300-80
3-1/2"	Specify	PVN-350-80
4"	Specify	PVN-400-80
5"	Specify	PVN-500-80
6"	Specify	PVN-600-80







PATENT PENDING PATENTED






HDPE PVC Conduit Guide



Schedule 40 & 80

- For 1-1/2" thru 8" PVC Conduit
- Makes for faster installation with less labor
- Reusable HDPE for standard cards and Bell End clearance holes in Duct Bank applications

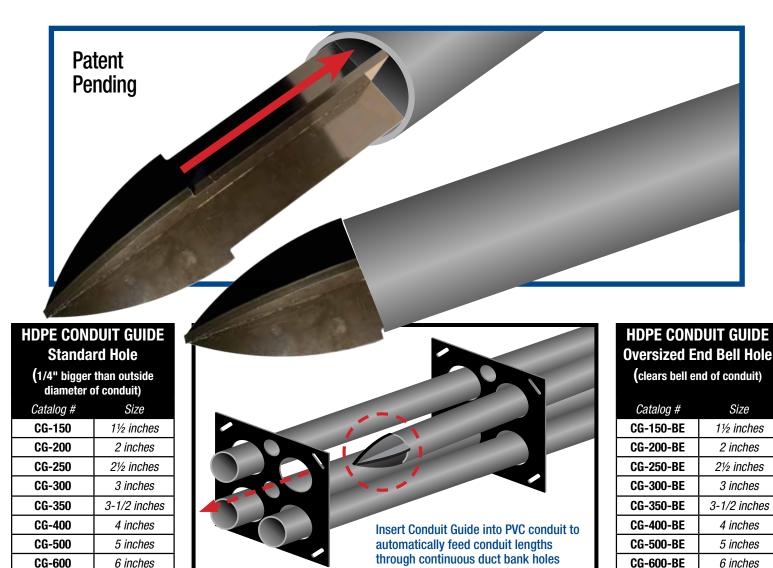

-	PRODUCTS,	INC
	Productivity and value thru	ideas

8 inches







PATENT PENDING PATENTED

CG-800-BE



8 inches

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007 P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595 E: info@spproducts.com • www.spproducts.com

without assistance.

CG-800

Long Slip **PVC** Coupling

Schedule 40 & 80

- For 1/2" thru 6" PVC Conduit
- Maintains same inside diameter
- Faster installation with less labor
- Allows longer and more stable support than tradtional PVC coupling
- Slip in PVC and glue into one end and slip in and glue into the remaining end to continue conduit run -PVC
- Slip PVC conduits into the Long Slip PVC coupling and glue





NEW

LONG CLID GOUDLING			
LONG SLIP COUPLING			
Catalog #	Size		
LS-PVC-75	¾ inches		
LS-PVC-100	1 inches		
LS-PVC-125	1¼ inches		
LS-PVC-150	1½ inches		
LS-PVC-200	2 inches		
LS-PVC-250	2½ inches		
LS-PVC-300	3 inches		
LS-PVC-350	3½ inches		
LS-PVC-400	4 inches		
LS-PVC-500	5 inches		
LS-PVC-600	6 inches		

Catalog #	Size
LS-PVC-75	¾ inches
LS-PVC-100	1 inches
LS-PVC-125	1¼ inches
LS-PVC-150	1½ inches
LS-PVC-200	2 inches
LS-PVC-250	2½ inches
LS-PVC-300	3 inches
LS-PVC-350	3½ inches
LS-PVC-400	4 inches
LS-PVC-500	5 inches

Perfect and more stable for duct bank applications.









PATENT PENDING **PATENTED**




LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

Long Slip Bell NEW **PVC** Coupling to RGD

Schedule 40 & 80

Patent Pending

- For 1/2" thru 6" PVC Conduit
- Maintains same inside diameter for both PVC and RGD
- Faster installation with less labor
- More stability than standard coupling
- Slip into and glue PVC into bell end and screw RGD into threaded end
- Eliminates the need for a PVC coupling
- Slip the Long Slip Bell PVC end of coupling onto stubup and transition to RGD

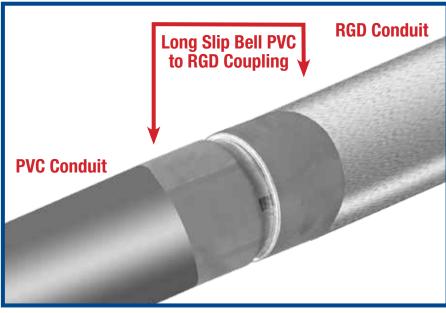

LONG SLIP to RGD		
Catalog #	Size	
LSB-RGD-75	3/4 inches	
LSB-RGD-100	1 inches	
LSB-RGD-125	1¼ inches	
LSB-RGD-150	1½ inches	
LSB-RGD-200	2 inches	
LSB-RGD-250	2½ inches	
LSB-RGD-300	3 inches	
LSB-RGD-350	3½ inches	
LSB-RGD-400	4 inches	
LSB-RGD-500	5 inches	
LSB-RGD-600	6 inches	



Productivity and value thru ideas







PATENT PENDING PATENTED



IP3q

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE




E: info@spproducts.com • www.spproducts.com

MADE IN USA

EZ Raised Bracketfor Box Support

- Elevates box 2", 1-5/8" or 7/8" above surface mount
- Provides box support independent of conduit
- Provides support for 4", 4-11/16", 5" and 6" square NEMA boxes
- 4 anchor holes for stable install

- Perfect for mounting on decks, floors and walls
- Works with metal and wooden studs.
- Can be used for wall packs on block or brick
- 20 Gauge Galvanized Steel
- Meets buy American Regulations

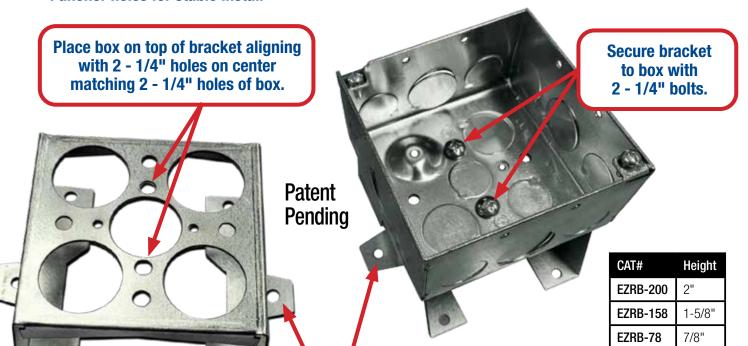

Utilize additional holes on bracket legs if used on floor.

Meets NEC 300.11 (A) and 323.14 (A & B) Codes

Fasten bracket and box assembly to stud with 1/4" bolt holes provided on outer perimeter of bracket.



Can be installed using SP support plates as first means of support for conduit and raceways









PATENT PENDING PATENTED






"THE ORIGINAL" Box Support Plate

SAVE MORE THAN 30 MINUTES PER INSTALL WITH LESS MATERIAL

Meets NEC 3 Foot Rule From Only One Support

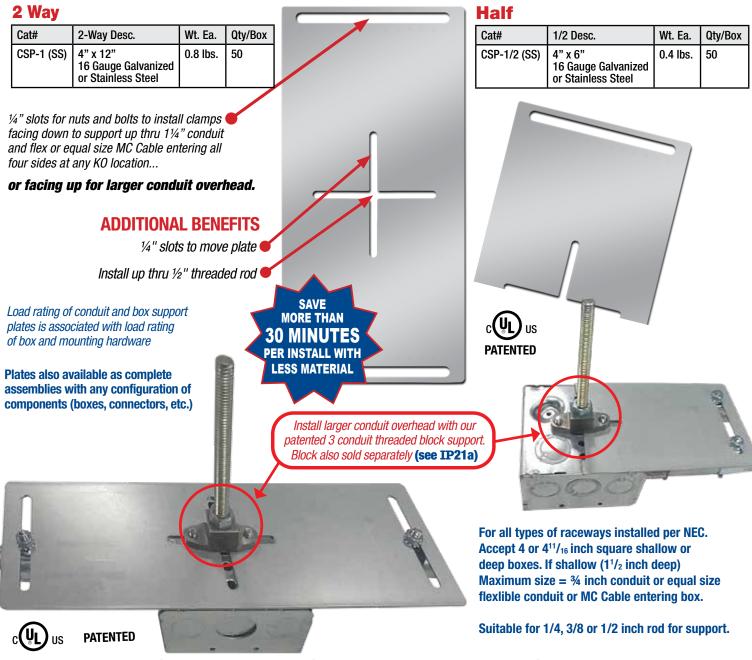

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



4-WAY **BOX SUPPORT SAVE UP TO 1 HOUR PER INSTALLATION** WITH LESS MATERIAL





Cat#	4-Way Desc.	Wt. Ea.	Qty/Box
CSP-4W-WC (SS)	9-5/8" x 9-5/8" 18 Gauge Galvanized or Stainless Steel (SS)	0.7 lbs.	25

SEE WEBSITE VIDEO IP1

Install up thru1/2" 1/4" slots to move plate threaded rod Markings to quickly center & attach box Eliminate center KO clamps for up thru 34" Conduit, Flex or equal size MC Cable entering all 4 sides of box at center KO location only. Bend tabs down, feed raceways thru PATENTED openings to connectors on box. Holes for tek screws are also provided to attach conduit clamps when entering all other KO locations. 4 large open KOs in center allow entering back of box with up thru 34" raceways to save even more time.



Tek screw holes and 1/4" slots for nuts and bolts to install clamps facing down to support up thru 11/4" conduit and flex or equal size MC Cable entering all four sides at any KO location... or facing up for larger conduit overhead. **Use 4-Conduit Block** (IP19 or IP20) with QwikBlock (IP21A)

Load rating of conduit and box support plates is associated with load rating of box and mounting hardware










PATENT PENDING PATENTED



2-WAY BOX SUPPORT



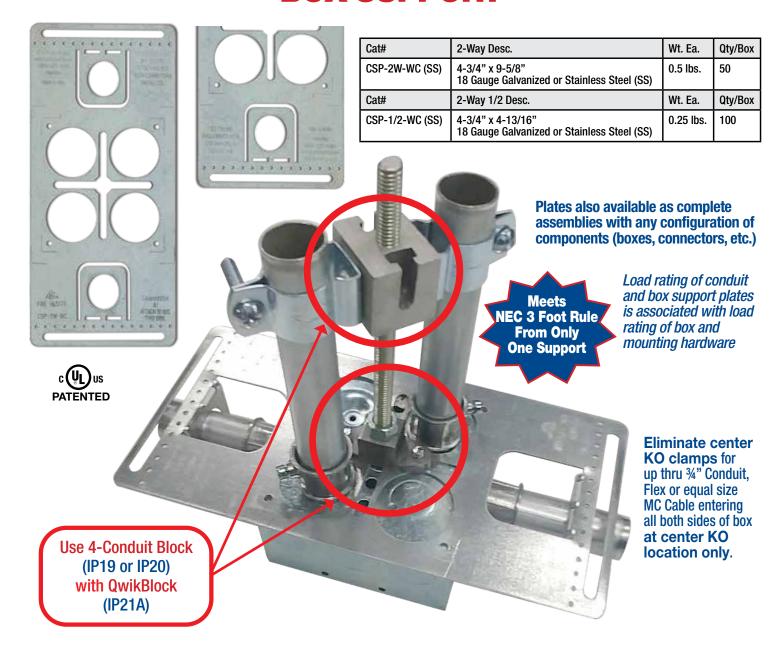

For all types of raceways installed per NEC.

Accepts 4 or 4¹¹/₁₆ & 5" inch square shallow or deep boxes.

If shallow (1¹/₂ inch deep) Maximum size = ³/₄ inch conduit or equal size flexible conduit or MC Cable entering box.

Suitable for 1/4, 3/8 or 1/2 inch rod for support.







US

PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE


"ORIGINAL ROUND" Box Support Plate





Cat#	4-Way Desc.	Wt. Ea.	Qty/Box
CSPR (SS)	11-3/4" Diameter 20 Gauge Galvanized or Stainless Steel (SS)	1 lb.	25



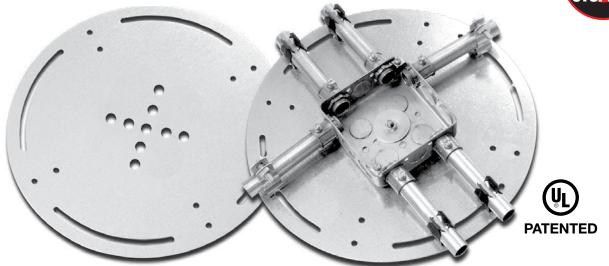

MODIFIED ROUND
Box Support Plate

Cat#	4-Way Desc.	Wt. Ea.	Qty/Box
CSPR-4K0 (SS)	11-3/4" Diameter 20 Gauge Galvanized or Stainless Steel (SS)	1 lb.	25

4 large open KOs in center allow entering back of box with up thru ¾" raceways to save even more time.

Plates Suitable for 4, 4-11/16, 5 inch Square Plus up thru 8 x 8 inch Junction Boxes Mounted Either Horizontally or Vertically. 3/32" Holes for Self Tappers and 1/4" Wide Open Slot at Each End Allow Fastening Clamps for Conduit Supports at any KO center.

Assemblies Complete with Box, Connectors, Rod, "Econo-Whips" etc. Attached Available.



Load rating of conduit and box support plates is associated with load rating of box and mounting hardware










PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

UNIVERSAL ROUND MADE IN USA Box Support Plate

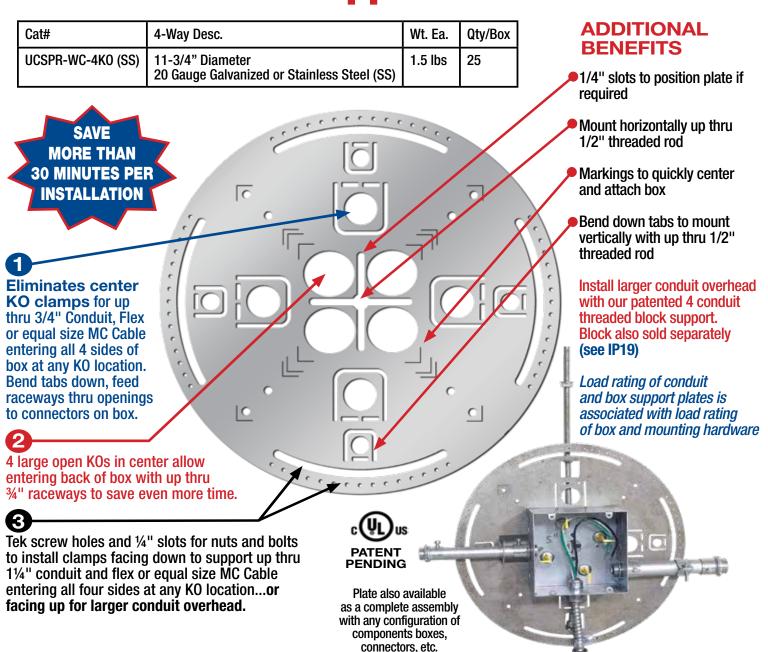

ALL FROM ONLY ONE SUPPORT HORIZONTALLY OR VERTICALLY

For all types of raceways installed per NEC.

Accepts 4, $4^{11}/_{16}$, 5 inch square shallow or deep boxes and 6 x 6 & 8 x 8 inch junction boxes. If shallow ($1^{1}/_{2}$ inch deep) Maximum size = $\frac{3}{4}$ inch conduit or equal size flexlible conduit or

MC Cable entering box. Suitable for 1/4, 3/8 or 1/2 inch rod for support.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE


2-WAY BOX SUPPORT PLATES with **FINGERS**



Cat#	2-Way Desc.	Wt. Ea.	Qty/Box
CSPV-2W-FC (SS)	5" x 11-1/2" 18 Gauge Galvanized or Stainless Steel (SS)	0.5 lbs.	50
Cat#	2-Way ¹ /2 Desc.	Wt. Ea.	Qty/Box
CSPV-1W-FC (SS)	5" x 5-3/4" 18 Gauge Galvanized or Stainless Steel (SS)	0.25 lbs.	100

SAVE OVER HALF HOUR PER INSTALL WITH **LESS MATERIAL**



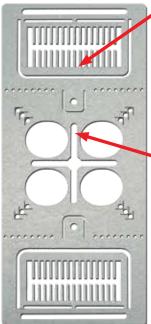

18 Gauge Galvanized or Stainless Steel

For vertical application bend 2 smaller tabs out and insert 1/4", 3/8" or 1/2" rod secured with nuts for vertical support.

PATENTED

OR insert rod in fixed hole of plate and aecure with Qwik Block (IP21a) to automaticlly center with either a 1/4"

or 3/8" threaded rod with punching a center KO on top of box.

Use 4-Conduit Block (IP19 or IP20) with QwikBlock (IP21A)





or Stainless Steel



Load rating of conduit and box support plates is associated with load rating of box and mounting hardware.

Fingers eliminate all clamps for up thru 11/4" conduit, flex or equal size MC Cable entering any KO location 1 or 2 sides of box.

Plates also available as a complete assembly with any configuration of components boxes, connectors, etc.

For all types of raceways installed per NEC.

Accept 4, 411/16, 5 inch square shallow or deep boxes. If shallow (11/2 inch deep) Maximum size = ¾ inch conduit or equal size flexible conduit or MC Cable entering box. Suitable for 1/4, 3/8 or 1/2 inch rod for application.









PATENT PENDING PATENTED




LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

4-WAY

BOX SUPPORT PLATE





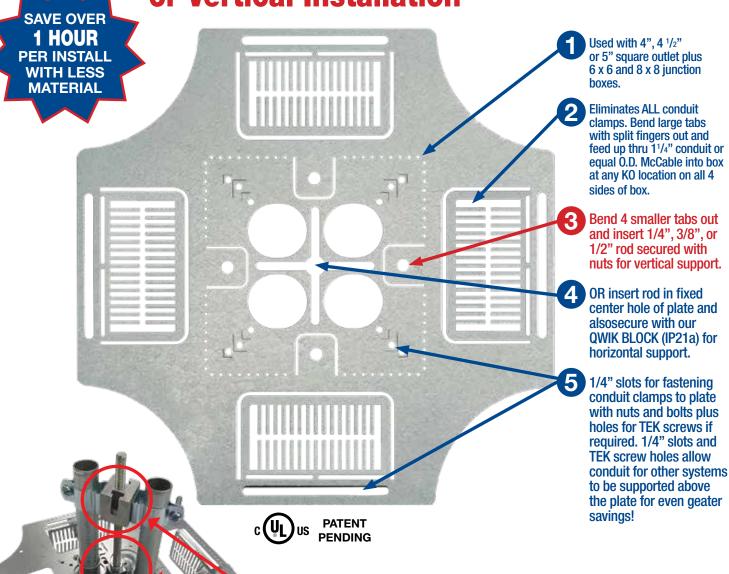

Use 4-Conduit Block (IP19 or IP20) with QwikBlock (IP21A)

ı	Cat#	2-Way Desc.	Wt. Ea.	Qty/Box
	CSPV-4W-FC (SS)	11-1/2" x 11-1/2" 18 Gauge Galvanized or Stainless Steel (SS)	0.75 lbs.	25





E: info@spproducts.com • www.spproducts.com





PATENT PENDING PATENTED



Junction Box Support Plates



20" x 20" Supports Up Thru 12" x 12" J Box 28" x 28" Supports Up Thru 20" x 20" J Box

Mount Horizontally or Vertically from 1 single support

Bend down four tabs at centers of outer edges to accept up thru 1/2" rod for vertical installation.


Drill hole in center of back of box to allow attaching single support through open cross on 20 x 20 plate to mount horizontally.

4 open KO's in center of plate allow conduit or MC Cable to enter and leave back of box.

Load rating of conduit and box support plates is associated with load rating of box and mounting hardware

20 x 20 Plate installed horizontally by one single support from ceiling eliminating additional supports for box and conduits entering box.



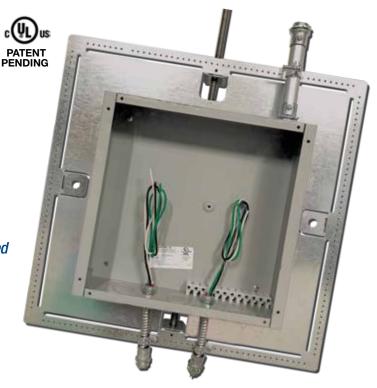

Cat#	Desc.	Wt. Ea.	Qty/Box
CSP20x20	20" x 20" 16 Gauge Galvanized or Stainless Steel (SS)	7.3 lbs	8
CSP28x28	28" x 28" 16 Gauge Galvanized or Stainless Steel (SS)	14 lbs	Any Qty.

- 1/4" Slots & Tek screw holes provided to install clamps at any location
- Other Dimensions for Smaller/Larger Boxes available, Consult Factory










PATENT PENDING PATENTED



Grid-System Box Support Plate



For Medical Centers, Hospital Rooms Requiring Power & Lighting, Emergency Power, & Alarms

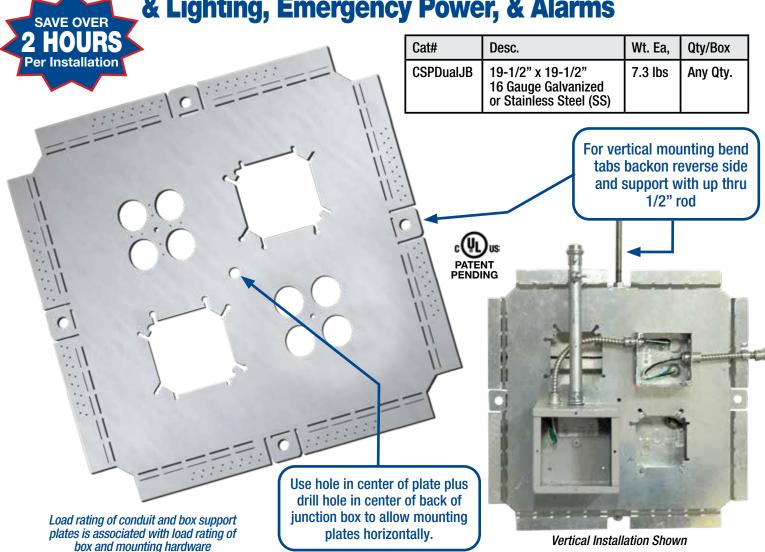

Mount Horizontally or Vertically from 1 single support

- Accepts 4", 4¹¹/₁₆, & 5" square boxes up thru 12" x 12" junction boxes.
- Mount two or more systems on same plate without cable and boxes interfering with each other.
- Allows faster, easier trouble shooting and organizing systems on jobs.
- 4 Large elliptical holes allow lining up box & plate for fast easy access in/out back of the box.
- Mount boxes above & below the plate when is installed horizontally.







PATENT PENDING PATENTED



Nylon Wrap-Around Conduit Straps

> **Quickly & Firmly Secure Conduit in Seconds**







- No Tools Required
- Flame Retardant
- Up Thru 950 lb Load Ratings
- Plenum Rated Up Thru 11/2" Size

	EL	ECTRIC	AL	Max
CAT#	EMT	Heavy Wall	IMC	Load lbs.
SPP-12-16P	N/A	N/A	N/A	170
SPP-17-20P	1/2" (.706)	N/A	N/A	195
SPP-21-24P	3/4" (.922)	1/2" (.840)	1/2" (.815)	215
SPP-25-29P	N/A	3/4" (1.050)	3/4" (1.029)	315
SPP-30-34P	1" (1.163)	1" (1.315)	1" (1.290)	320
SPP-35-38P	1-1/4" (1.510)	N/A	N/A	342

	EL	ECTRIC	AL	Max
CAT#	EMT	Heavy Wall	IMC	Load lbs.
SPP-40-44P	1-1/2" (1.740)	1-1/4" (1.660)	1-1/4" (1.638)	365
SPP-48-54P	N/A	1-1/2" (1.900)	1-1/2" (1.883)	380
SPP-56-63P	2" (2.197)	2" (2.375)	2" (2.360)	410
SPP-66-76P	2-1/2" (2.875)	2-1/2" (2.875)	2-1/2" (2.857)	500
SPP-79-93P	3" (3.500)	3" (3.500)	3" (3.476)	600
SPP-101-115P	3½ & 4" (4.500)	4" (4.500)	4" (4.466)	950

NOTE: Fractional numbers reflect nominal pipe diameter, decimal numbers actual O.D. in inches.

Also Ideal for HVAC, Plumbing & Mechanical Installations









PATENT PENDING PATENTED




IP9

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007

EZ Stub-Up SUPPORT BRACKET



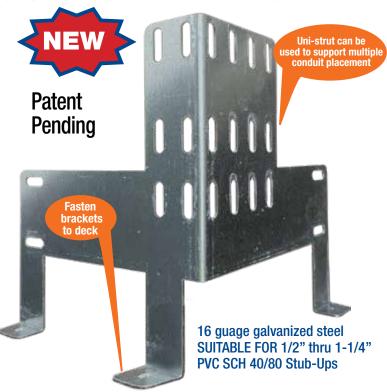



Multiple Conduit Minnies



Ty Wrap Single Application



Multiple Conduit Minnies with Uni-Strut in Pairs



Ty Wrap Multiple Application




HDPE Application




Ty Wrap Application

Cat#	Desc.
EZ-STUB-50-125	Supports 1/2" thru 1-1/4" PVC Conduit

Use nylon wrap around conduit straps, minerllacs, one-hole straps or Ty wraps to secure conduit to bracket or uni-strut

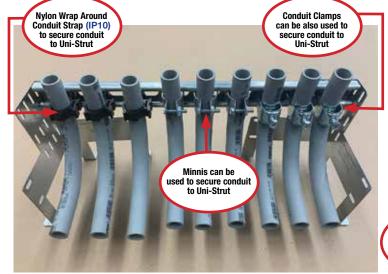

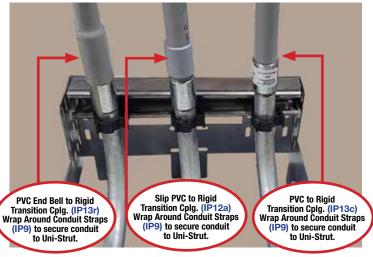

Perfect for Poured Precast Decks!









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

Trapeze Brackets



Eliminates 5 Conduit Clamps per Foot PLUS Support Rods, Conduit Straps, etc.



- For 1/4" or 3/8" Threaded Rod.
- Meets UL 2239 & CSA C22.2 No.18.4
- Galvanized or Stainless Steel (plus other gauges available)

Original Feed Thru 5 Conduits per foot

Plastic Bushings for pulling LV, MC Cable, etc. must be UL Listed to maintain UL Listing when installed in the field or SP factory.



- 1 foot thru 6 foot pieces
- Order in 1 ft. increments
- 5 openings per foot spaced 2¼" on center

Original EZUTB – Size ½" thru 1¼" Conduit or equal size MC Cable

Trapeze Brackets Wt. 0.56 lbs per foot 1/2" thru 1-1/4"		
Size	5 Conduits Catalog #	
12"	EZUTB12-16GS (SS)	
24"	EZUTB24-16GS (SS)	
36"	EZUTB36-16GS (SS)	
48"	EZUTB48-16GS (SS)	
60"	EZUTB60-16GS (SS)	
72″	EZUTB72-16GS (SS)	
16GS = 16 Gauge Galvanized Steel		

16GS = 16 Gauge Galvanized Steel (SS) = 302 Stainless Steel

Feed Thru 6 Conduits per foot



- Accomodates maximum number of 1/2" or 1" Conduit or equal size MC Cable to fit the width of the panel can.
- Maximizes straight runs and minimizes the 90°installations

Trapeze Brackets Wt. 0.56 lbs per foot 1/2" thru 1"		
Size	6 Conduits Catalog #	
12"	EZUTB75/100-12-16GS (SS)	
24"	EZUTB75/100-24-16GS (SS)	
36"	EZUTB75/100-36-16GS (SS)	
48"	EZUTB75/100-48-16GS (SS)	
60"	EZUTB75/100-60-16GS (SS)	
72″	EZUTB75/100-72-16GS (SS)	
16GS = 16 Gauge Galvanized Steel		

Feed Thru 8 or 4 Conduits per foot



Trapeze Brackets 1/2" thru 2"		
Size	4 Conduits Catalog #	
12"	EZUTB200-12-14GS	
Size	8 Conduits Catalog #	
24"	EZUTB200-24-14GS	
14GS = 14 Gauge Galvanized Steel		

 Accomodates maximum number of 1/2" or 2" Conduit or equal size MC Cable.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007 P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595

E: info@spproducts.com • www.spproducts.com


IP11



Trapeze Brackets












Stack Overhead in Tight Areas

Vertical on Walls

on Decks

Attach Conduit/Box Support Plates Above & Below Conduit

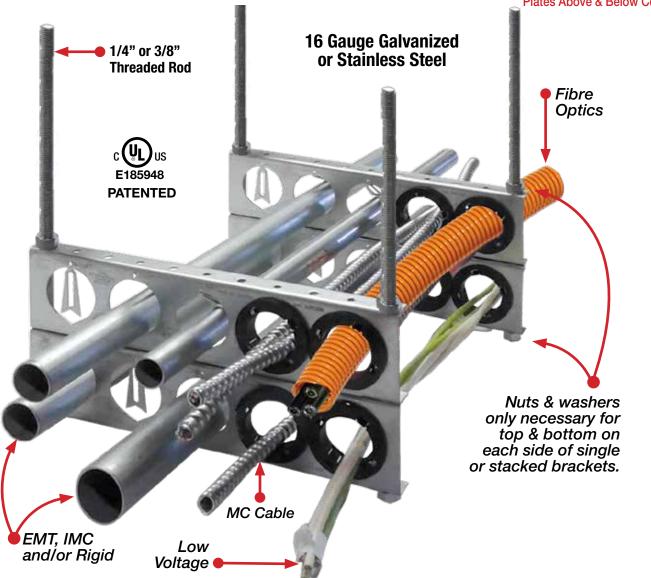

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

Custom Trapeze Brackets



Centered captive capped bolts hold conduit in place

Lay-In...

Example: for 4" EMT Li EZUTB 4-4, and EMT Li

PATENTED



Example: 4 – Four Inch Conduits EZUTB 4-4 EMT

PATENT PENDING



Available in Any Gauge Galvanized or Stainless Steel and Any Size Conduit or Configuration. Consult Factory.

or Customized!



Tell Us What You Need... We'll Make It!

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED




LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

Wide Bottom Flange



Allows Drill Chuck Clearance When Installing Vertically on Walls or Horizontally on Decks.

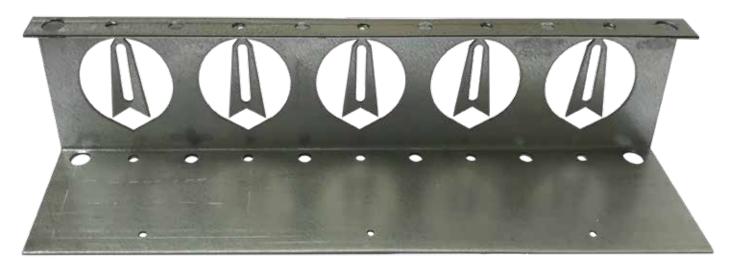

1-3/4" taller version for conduit clearance from deck.

Consult factory for price and avilability.

Cat#	4-Way Desc.	Wt. Ea.	Qty/Box
EZUTB(Length)-WF	16 Gauge Galvanized or Stainless Steel (SS)	0.7 lbs.	25

Customer must satisfy all codes and owners' specifications.

E: info@spproducts.com • www.spproducts.com









PATENT PENDING PATENTED




LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007 P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595

IP11c

Split Steel Nuts

Save valuable time placing the nut at desired position instead of spinning the nut up long lengths of threaded rod to final location.

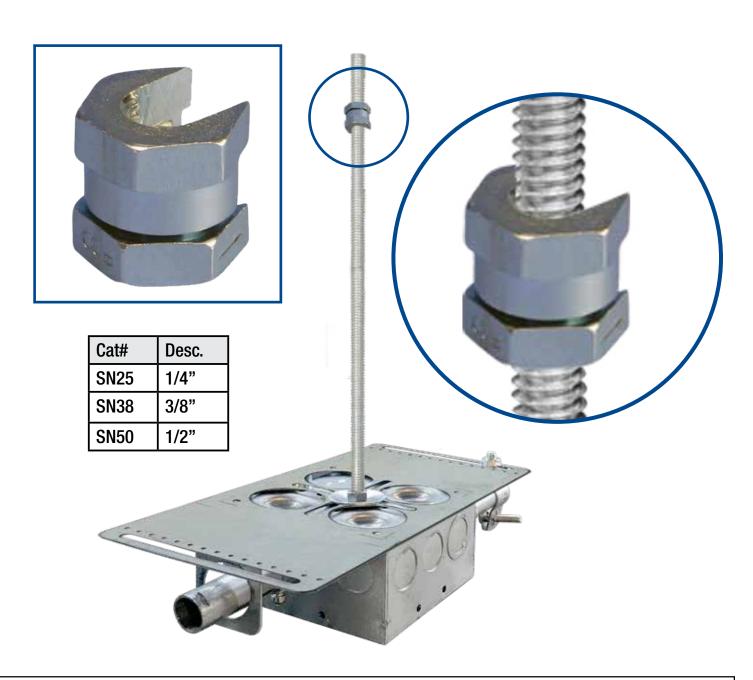







PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007 P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595 E: info@spproducts.com • www.spproducts.com



Transition Slip Couplings



PVC CONDUIT SCH 40 & 80 NO REAMING BITS NEEDED!











PVC to Flexible



PVC to Liquidtite



PVC to



PVC to EMT



PVC to Stainless Steel



PVC to End Bell



PVC to Smooth Bushing



EXAMPLE: PVC TO GALVANIZED RIGID APPLICATION

Transition Slip Couplings are ideal for all types of projects plus save a great deal of money:

- Waste Water
 Treatment Plants
- Food Processing Plants
- Data Centers
- Hospitals
- Stadiums
- Expo Centers
- Light Rail
- Military Facilities
- Airports
- Museums

Use On Entire Job Not Just For Repair!

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED







MADE





Save Cost on the Rigid Nipple, Tape & Labor

Use for Entire Job - Not Just for Repair

Reamer NOT Required to Transition from PVC to Rigid

aid of

1/2" thru 6"

See Our

Conduit Plug See page IP27c

Transition Couplings		
Size	Catalog #	
1/2"	50 SLIP/RGD	
3/4"	75 SLIP/RGD	
1"	100 SLIP/RGD	
1-1/4"	125 SLIP/RGD	
1-1/2"	150 SLIP/RGD	
2"	200 SLIP/RGD	
2-1/2"	250 SLIP/RGD	
3"	300 SLIP/RGD	
3-1/2"	350 SLIP/RGD	
4"	400 SLIP/RGD	
5"	500 SLIP/RGD	
6"	600 SLIP/RGD	

All SP Products Inc. Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications

Apply PVC Cement

to Secure & Complete






Step 1
Install PVC Coupling

on Conduit Flush or Just Below Grade

and Cap wih

(Conduit Plut IP27c) or

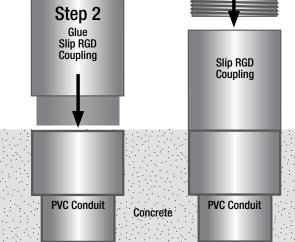

Customer must satisfy all codes and owners' specifications.







Attach
GRC Conduit to
Slip RGD
Coupling



PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



PVC Conduit



PVC Schedule 40 & 80 Slip to Flexible

PATENTED

Transitions in One Minute

Save Cost on the Rigid Nipple, Tape & Labor

Use for Entire Job - Not Just for Repair

Reamer NOT Required to Transition from PVC to Flexible Conduit

Apply PVC Cement to Secure & Complete






Step 3 Attach FLEX Conduit to Slip FLEX Coupling





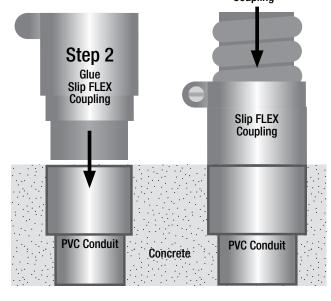

1/2" thru 1-1/2"

Transition Couplings	
Size	Catalog #
1/2"	50 SLIP/FLEX
3/4"	75 SLIP/FLEX
1"	100 SLIP/FLEX
1-1/4"	125 SLIP/FLEX
1-1/2"	150 SLIP/FLEX

All SP Products Inc. Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



PVC Conduit



PVC Schedule 40 & 80 Slip to Liquidtite



MADE



Save Cost on the Rigid Nipple, Tape & Labor

Step 3 Attach Liquidtite Conduit to Slip Liquidtite Coupling

Use for Entire Job - Not Just for Repair

Reamer NOT Required to Transition

from PVC to Liquidtite

Apply PVC Cement to Secure & **Complete**



1/2" thru 4"


Transition Couplings		
Size	Catalog #	
1/2"	50 SLIP/LIQ	
3/4"	75 SLIP/LIQ	
1"	100 SLIP/LIQ	
1-1/4"	125 SLIP/LIQ	
1-1/2"	150 SLIP/LIQ	
2"	200 SLIP/LIQ	
2-1/2"	250 SLIP/LIQ	
3"	300 SLIP/LIQ	
3-1/2"	350 SLIP/LIQ	
4"	400 SLIP/LIQ	

All SP Products Inc. Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications

Step 1

Install PVC Coupling on Conduit Flush or Just Below Grade and Cap wih (Conduit Plut IP27c) or **Tape Prior to Pour**



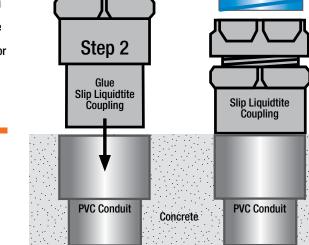

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007 P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595 E: info@spproducts.com • www.spproducts.com

PVC Conduit

PVC Schedule 40 & 80 Slip to Aluminum







Save Cost on the Rigid Nipple, Tape & Labor

Use for Entire Job - Not Just for Repair

Reamer NOT Required to Transition from PVC to Aluminum Conduit

Apply PVC Cement to Secure & Complete





All SP Products Inc. Transition Fittings a re manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications



1/2" thru 6" Transition Couplings

Catalog #

50 SLIP/ALUM

75 SLIP/ALUM

100 SLIP/ALUM

125 SLIP/ALUM

150 SLIP/ALUM

200 SLIP/ALUM

250 SLIP/ALUM

300 SLIP/ALUM

350 SLIP/ALUM 400 SLIP/ALUM


500 SLIP/ALUM


600 SLIP/ALUM

Size 1/2" 3/4" 1" 1-1/4" 1-1/2" 2" 2-1/2" 3" 3-1/2" 4" 5"

Step 1

Install PVC Coupling on Conduit Flush or Just Below Grade and Cap wih (Conduit Plut IP27c) or Tape Prior to Pour



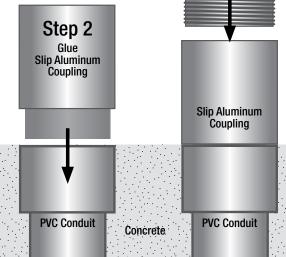

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

PVC Conduit

PVC Schedule 40 & 80 Slip to EMT



Installation.



Transitions in One Minute

Save Cost on the Rigid Nipple, Tape & Labor

Use for Entire Job - Not Just for Repair

Reamer NOT Required to Transition from PVC to EMT Conduit

Apply PVC Cement to Secure & Complete




1/2" thru 4"


Transition Couplings	
Size	Catalog #
1/2"	50 SLIP/EMT
3/4"	75 SLIP/EMT
1"	100 SLIP/EMT
1-1/4"	125 SLIP/EMT
1-1/2"	150 SLIP/EMT
2"	200 SLIP/EMT
2-1/2"	250 SLIP/EMT
3"	300 SLIP/EMT
3-1/2"	350 SLIP/EMT
4"	400 SLIP/EMT

All SP Products Inc. Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications

Step 1

Install PVC Coupling on Conduit Flush or Just Below Grade and Cap wih (Conduit Plut IP27c) or Tape Prior to Pour



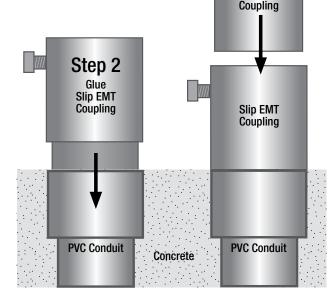

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

Step 3
Attach
EMT Conduit
to Slip EMT



PVC Conduit

PVC Schedule 40 & 80 Slip to Stainless Steel

Save at Least Installation.



Transitions in One Minute

Save Cost on the Rigid Nipple, **Tape & Labor**

Use for Entire Job -Not Just for Repair

Reamer NOT Required to Transition from PVC to Stainless Steel Conduit

Apply PVC Cement to Secure & Complete






Step 1

Install PVC Coupling on Conduit Flush or Just Below Grade and Cap wih (Conduit Plut IP27c) or Tape Prior to Pour



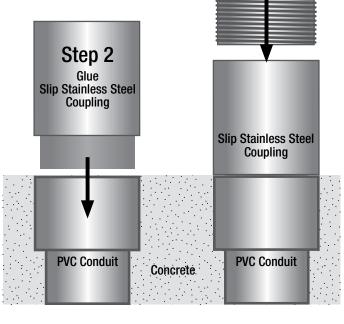

1/2" thru 4"

Transition Couplings		
Size	Catalog #	
1/2"	50 SLIP/SS	
3/4"	75 SLIP/SS	
1"	100 SLIP/SS	
1-1/4"	125 SLIP/SS	
1-1/2"	150 SLIP/SS	
2"	200 SLIP/SS	
2-1/2"	250 SLIP/SS	
3"	300 SLIP/SS	
3-1/2"	350 SLIP/SS	
4"	400 SLIP/SS	

All SP Products Inc. Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2. TC3 or UL 651 specifications

Customer must satisfy all codes and owners' specifications.









Step 3

Attach

Stainless Steel **Conduit to Slip** Stainless Steel Coupling

> **PATENT PENDING PATENTED**



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



PVC Conduit



PVC Schedule 40 & 80 Slip to End Bell



Transitions in One Minute

Save Cost on the Rigid Nipple, Tape & Labor

Use for Entire Job - Not Just for Repair

Reamer NOT Required to Transition from PVC to End Bell



Apply PVC Cement to Secure & Complete


1/2" thru 6"


Transition Couplings		
Size	Catalog #	
1/2"	50 SLIP/EB	
3/4"	75 SLIP/EB	
1"	100 SLIP/EB	
1-1/4"	125 SLIP/EB	
1-1/2"	150 SLIP/EB	
2"	200 SLIP/EB	
2-1/2"	250 SLIP/EB	
3"	300 SLIP/EB	
3-1/2"	350 SLIP/EB	
4"	400 SLIP/EB	
5"	500 SLIP/EB	
6"	600 SLIP/EB	

All SP Products Inc. Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications

Step 1

Install PVC Coupling on Conduit Flush or Just Below Grade and Cap wih (Conduit Plut IP27c) or Tape Prior to Pour



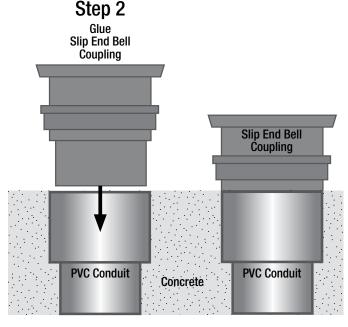

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007 P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595 E: info@spproducts.com • www.spproducts.com

PVC Conduit

PVC Schedule 40 & 80 Slip to Smooth Bushing

Save at Least 1 HOUI per Installation.

See Our

Conduit Plug

See page IP27c

MADE





Transitions in One Minute

Save Cost on the Rigid Nipple, Tape & Labor

Use for Entire Job - Not Just for Repair


Reamer NOT Required to Transition from PVC to Smooth Bushing (SB)

Apply PVC Cement to Secure & Complete



Install PVC Coupling on Conduit Flush or Just Below Grade and Cap wih (Conduit Plut IP27c) or Tape Prior to Pour



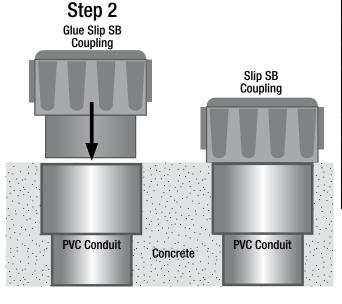

1/2" thru 4"

Transition Couplings		
Size	Catalog #	
1/2"	50 SLIP/SB	
3/4"	75 SLIP/SB	
1"	100 SLIP/SB	
1-1/4"	125 SLIP/SB	
1-1/2"	150 SLIP/SB	
2"	200 SLIP/SB	
2-1/2"	250 SLIP/SB	
3"	300 SLIP/SB	
3-1/2"	350 SLIP/SB	
4"	400 SLIP/SB	

All SP Products Inc. Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

PVC Conduit



Transition Slip Couplings



PVC Schedule 40 & 80 Slip to HDPE Conduit



BonDuit and BonDuit XI are

UL recognized and was tested to

UL standard 746C.

- Step 1 Install PVC Coupling prior to pour and cap (Conduit Plug IP27c) or tape
- Step 2 Glue Slip Coupling into PVC Coupling
- Step 3 Install HDPE Conduit using Polywater® Bonduit® Conduit Adhesive to connect to PVC Slip Coupling


1/2" thru 4"


Transition Couplings	
Size	Catalog #
1/2"	50 SLIP/HDPE
3/4"	75 SLIP/HDPE
1"	100 SLIP/HDPE
1-1/4"	125 SLIP/HDPE
1-1/2"	150 SLIP/HDPE
2"	200 SLIP/HDPE
2-1/2"	250 SLIP/HDPE
3"	300 SLIP/HDPE
3-1/2"	350 SLIP/HDPE
4"	400 SLIP/HDPE
5"	500 SLIP/HDPE
6"	600 SLIP/HDPE

All SP Products Inc. Transition
Fittings are manufactured for
installation to either meet or
exceed in accordance with
NEMA TC2, TC3 or UL 651
specifications

Using Polywater® BonDuit®
Conduit Adhesive creates a
permanent watertight/airtight seal
connecting PVC to HDPE.

Stronger pullout strength than most mechanical couplings.





PVC Coupling

PVC Conduit

Slip Coupling

PVC Coupling

PVC Conduit

Concrete

Step 3

Use On Entire Job Not Just For Repair!









PATENT PENDING PATENTED





Transition Slip Couplings



PVC Schedule 40 & 80 Slip to Fiberglass Conduit



1/2" thru 4"

Transition Couplings	
Size	Catalog #
1/2"	50 SLIP/FIBER
3/4"	75 SLIP/FIBER
1"	100 SLIP/FIBER
1-1/4"	125 SLIP/FIBER
1-1/2"	150 SLIP/FIBER
2"	200 SLIP/FIBER
2-1/2"	250 SLIP/FIBER
3"	300 SLIP/FIBER
3-1/2"	350 SLIP/FIBER
4"	400 SLIP/FIBER
5"	500 SLIP/FIBER
6"	600 SLIP/FIBER

Using Polywater®
BonDuit® Conduit Adhesive creates a permanent watertight/airtight seal connecting PVC to Fiberglass Conduit.

Stronger pullout strength than most mechanical couplings.

Step 1

PVC Coupling

PVC Conduit

Stub-Up

Step 2

Step 2

Slip Coupling

to pour and cap
(Conduit Plug IP27c) or tape

Step 2 - Glue Slip Coupling into
PVC Coupling

Install PVC Coupling prior

Step 1 -

Step 3 - Install Fiberglass Conduit using Polywater® Bonduit® Conduit Adhesive to connect to PVC Slip Coupling

All SP Products Inc. Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications

Use On Entire Job Not Just For Repair!









PVC Coupling

PVC Conduit

PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

PVC Conduit

Stub-Up

PVC Coupling

PVC Conduit

Concrete



PATENTED

Transition Fittings

PVC CONDUIT SCH 40 & 80 When Exiting out of the Slab



All SP Products Inc. Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications.



PVC to **PVC**



PVC to **EMT**



PVC to Rigid



PVC to **Flex**



IP13e **PVC** to



PVC to **EMT Comp. Liquidtite**



PVC to **Aluminum**



PVC to **Stainless** Steel





IP13i **PVC** to **Galvanized** Rigid

END BELL PVC CONDUIT SCH 40 & 80

NO REEMING BITS REQUIRED







IP3s



IP3t

See conduit sizing charts on pages IP13a thru IP13q





PVC to **Bushing Adapter**



IP3k **PVC** to **PVC** Inside to Inside



PVC to **Threaded PVC**



Male PVC Threaded to PVC



Female PVC Threaded to PVC



3/4" PVC to **MC Cable**



PVC to **PVC Reducers**



Galvanized Rigid to PVC

Customer must satisfy all codes and owners' specifications.









PATENT PENDING **PATENTED**





Transition Fittings



PVC CONDUIT SCH 40 & 80 When Exiting out of the Slab




Transition couplings for all types of projects that save a great deal of money:

- Data Centers
- Waste Water Treatment Plants
- Food Processing Plants
- Hospitals
- Stadiums
- Expo Centers
- Light Rail
- Military Facilities
- Airports
- Museums



Use On Entire Job - Not Just For Repair!



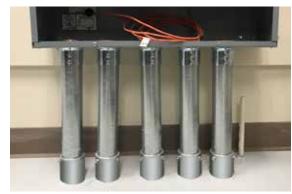



Sizes From 1/2" thru 6"









PATENT PENDING PATENTED






PVC Schedule 40 & 80 to PVC Conduit

Save at Least 1 HOUI per Installation.



Prevents Damage to **PVC Risers**

Use for Entire Job - Not Just for Repair





All SP Products Inc.
Transition Fittings are
manufactured for
installation to either
meet or exceed
in accordance with
NEMA TC2, TC3 or
UL 651 specifications


1/2" thru 6"


Transition Couplings UL Listed up thru 6"	
Size	Catalog #
1/2"	50PVC/PVC
3/4"	75PVC/PVC
1"	100PVC/PVC
1-1/4"	125PVC/PVC
1-1/2"	150PVC/PVC
2"	200PVC/PVC
2-1/2"	250PVC/PVC
3"	300PVC/PVC
3-1/2"	350PVC/PVC
4"	400PVC/PVC
5"	500PVC/PVC
6"	600PVC/PVC

All Above Meet UL651 CSA C22.2, No.85 and US Army Corps Engineers Specifications









Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



c U us PATENTED PVC Schedule 40 & 80 to EMT Conduit

Save at Least 1 HOUI per Installation.



Transitions in Less Than 5 Minutes!

Save Cost on the Rigid Nipple, Tape & Labor

Use for Entire Job - Not Just for Repair





1/2" thru 4"


All SP Products Inc.
Transition Fittings are
manufactured for
installation to either
meet or exceed
in accordance with
NEMA TC2, TC3 or
UL 651 specifications


Transition Couplings	
Size	Catalog #
1/2"	50PVC/EMT
3/4"	75PVC/EMT
1"	100PVC/EMT
1-1/4"	125PVC/EMT
1-1/2"	150PVC/EMT
2"	200PVC/EMT
2-1/"	250-PVC/EMT
3"	300PVC/EMT
3-1/2"	350PVC/EMT
4"	400PVC/EMT

For any size conduit and configuration either galvanized or stainless steel. Consult Factory









Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED





PVC Schedule 40 & 80 to Rigid Conduit

Save at Least 1 HOUI per Installation.



All SP Products Inc.

Transition Fittings are manufactured for

installation to either

meet or exceed

in accordance with NEMA TC2, TC3 or UL 651 specifications **Transitions in Less Than 5 Minutes!**


Save Cost on the Rigid Nipple, Tape & Labor


Use for Entire Job - Not Just for Repair





1/2" thru 6"

Transit	ion Couplings
Size	Catalog #
1/2"	50PVC/RGD
3/4"	75PVC/RGD
1"	100PVC/RGD
1-1/4"	125PVC/RGD
1-1/2"	150PVC/RGD
2"	200PVC/RGD
2-1/2"	250PVC/RGD
3"	300PVC/RGD
3-1/2"	350PVC/RGD
4"	400PVC/RGD
5"	500PVC/RGD
6"	600PVC/RGD









Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



PVC Schedule 40 & 80 to Flexible Metal Conduit

Save at Least

1 Hour per Installation.






Transitions in Less Than 5 Minutes!

Save Cost on the Rigid Nipple, Tape & Labor

Use for Entire Job - Not Just for Repair





All SP Products Inc.


Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications


1/2" thru 1-1/2"

Transition Couplings	
Size	Catalog #
1/2"	50PVC/FLEX
3/4"	75PVC/FLEX
1"	100PVC/FLEX
1-1/4"	125PVC/FLEX
1-1/2"	150PVC/FLEX









Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



PVC Schedule 40 & 80 to EMT Compression

Save at Least 1 HOUI per Installation.





Transitions in Less Than 5 Minutes!

Save Cost on the Rigid Nipple, Tape & Labor


Use for Entire Job - Not Just for Repair





All SP Products Inc. Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications


1/2" thru 4"

Trans	sition Couplings
Size	Catalog #
1/2"	50PVC/EMT-C
3/4"	75PVC/EMT-C
1"	100PVC/EMT-C
1- 1/4"	125PVC/EMT-C
1-1/2"	150PVC/EMT-C
2"	200PVC/EMT-C
2-1/2"	250PVC/EMT-C
3"	300PVC/EMT-C
4"	400PVC/EMT-C









Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

PVC Schedule 40 & 80 to Sealtite/Liquidtite

Save at Least 1 HOUI per Installation.



Transitions in Less Than 5 Minutes!

Save Cost on the Rigid Nipple, Tape & Labor


Use for Entire Job - Not Just for Repair





All SP Products Inc.
Transition Fittings are
manufactured for
installation to either
meet or exceed
in accordance with
NEMA TC2, TC3 or
UL 651 specifications


1/2" thru 4"

Trans	ition Couplings
Size	Catalog #
1/2"	50-PVC/LIQ
3/4"	75PVC/LIQ
1"	100PVC/LIQ
1 -1/4"	125PVC/LIQ
1 -1/2"	150PVC/LIQ
2"	200PVC/LIQ
2 -1/2"	250PVC/LIQ
3"	300PVC/LIQ
3 -1/2"	350PVC/LIQ
4"	400PVC/LIQ









Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED







PVC Schedule 40 & 80 to Aluminum Conduit

Save at Least 1 HOUI per Installation.

c(VL)us PATENTED



Transitions in Less Than 5 Minutes!

Save Cost on the Rigid Nipple, Tape & Labor


Use for Entire Job - Not Just for Repair





1/2" thru 6"


All SP Products Inc.
Transition Fittings are
manufactured for
installation to either
meet or exceed
in accordance with
NEMA TC2, TC3 or
UL 651 specifications

Trans	ition Couplings
Size	Catalog #
1/2"	50PVC/ALUM
3/4"	75PVC/ALUM
1"	100PVC/ALUM
1-1/4"	125PVC/ALUM
1½"	150PVC/ALUM
2"	200PVC/ALUM
2-1/2"	250PVC/ALUM
3″	300PVC/ALUM
3-1/2″	350PVC/ALUM
4"	400PVC/ALUM
5"	500PVC/ALUM
6"	600PVC/ALUM









Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



Transition Fittings





Save at Least 1 HOUI per Installation.





Transitions in Less Than 5 Minutes!

Save Cost on the Rigid Nipple, Tape & Labor


Use for Entire Job - Not Just for Repair





1/2" thru 4"


All SP Products Inc.
Transition Fittings are
manufactured for
installation to either
meet or exceed
in accordance with
NEMA TC2, TC3 or
UL 651 specifications

Trans	sition Couplings
Size	Catalog #
1/2"	50PVC/SS
3/4"	75PVC/SS
1″	100PVC/SS
1-1/4″	125PVC/SS
1-1/2″	150PVC/SS
2″	200PVC/SS
2-1/2″	250PVC/SS
3″	300PVC/SS
3-1/2″	350PVC/SS
4″	400PVC/SS









Customer must satisfy all codes and owners' specifications.

E: info@spproducts.com • www.spproducts.com









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



IP13h



PVC Schedule 40 & 80 End Bell to Galvanized Rigid Conduit




Quickly Transition
Galvanized Rigid or
Rigid Nipple Conduit
to Pvc End Bell





1/2" thru 6"

	Fransition Couplings
Size	Catalog #
1/2"	50-GRC-EB
3/4"	75-GRC-EB
1″	100-GRC-EB
1-1/4″	125-GRC-EB
1½″	150-GRC-EB
2″	200-GRC-EB
2-1/2"	250-GRC-EB
3″	300-GRC-EB
3-1/2"	350-GRC-EB
4″	400-GRC-EB
5"	500-GRC-EB
6"	600-GRC-EB

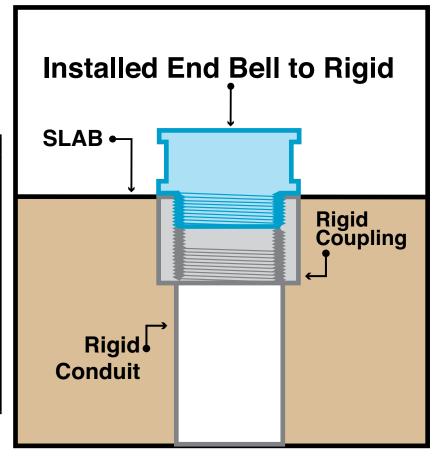

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

Transition Bushing Adapter





SCH 40 PVC to Smooth Bushing



Smooth edge allows trouble free wire pulls

3 Holes on 120° centers to receive tapped lugs

Transition Bushing Adapter for Pulling Wire

SIZE	CAT#
1/2"	50PVC/SB
3/4"	75PVC/SB
1"	100PVC/SB
1-1/4"	125PVC/SB
1-1/2"	150PVC/SB
2"	200PVC/SB
2-1/2"	250PVC/SB
3"	300PVC/SB
3-1/2"	350PVC/SB
4"	400PVC/SB

Install one with every connector

Ideal for installing transformers & switchgear

Transition Bushing Adapter for Pulling Grounding Wire

SIZE	CAT#
1/2"	50PVC/GSB
3/4"	75PVC/GSB
1"	100PVC/GSB
1-1/4"	125PVC/GSB
1-1/2"	150PVC/GSB
2"	200PVC/GSB
2-1/2"	250PVC/GSB
3"	300PVC/GSB
3-1/2"	350PVC/GSB
4"	400PVC/GSB

(Standard Slick Nut includes 1 Lug)

Must install 3 Lugs for UL Listing, extra lugs sold separately.

Consult Factory for prices and availability

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED





PVC Schedule 40 & 80 to Inside PVC to Inside PVC

Save at Least 1 HOUI per Installation.






Saves a Great Deal of Time Repairing Conduit

The Inside Diameter Remains the Same


Allows for Trouble Free Wire and Cable Pulss





1/2" thru 6"


All SP Products Inc.
Transition Fittings are
manufactured for
installation to either
meet or exceed
in accordance with
NEMA TC2, TC3 or
UL 651 specifications

Transition Couplings	
Size	Catalog #
1/2"	50PVC-IN/PVC-IN
3/4"	75PVC-IN/PVC-IN
1″	100PVC-IN/PVC-IN
1-1/4"	125PVC-IN/PVC-IN
1½″	150PVC-IN/PVC-IN
2″	200PVC-IN/PVC-IN
2-1/2"	250PVC-IN/PVC-IN
3″	300PVC-IN/PVC-IN
3-1/2″	350PVC-IN/PVC-IN
4″	400PVC-IN/PVC-IN
5"	500PVC-IN/PVC-IN
6"	600PVC-IN/PVC-IN









Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

ovard • Elk Grove Village II 60007



PVC Schedule 40 & 80 to PVC/PVC Threaded


Save at Least 1 HOUI per Installation.



Save a Great Deal of Time Repairing Conduit

The Inside Diameter Remains the Same

Allows for Trouble Free Wire and Cable Pulls

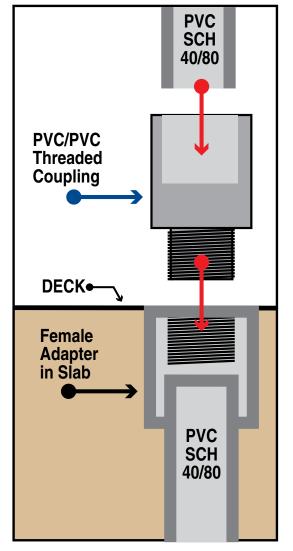



All SP Products Inc.
Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications

1/2" thru 6"

Transition Couplings	
Size	Catalog #
1/2"	50-PVC/PVC-THR
3/4"	75-PVC/PVC-THR
1″	100-PVC/PVC-THR
1-1/4″	125-PVC/PVC-THR
1-1/2″	150-PVC/PVC-THR
2″	200-PVC/PVC-THR
2-1/2"	250-PVC/PVC-THR
3″	300-PVC/PVC-THR
3-1/2"	350-PVC/PVC-THR
4″	400-PVC/PVC-THR
5"	500-PVC/PVC-THR
6"	600-PVC/PVC-THR

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED





PVC Schedule 40 & 80 to to Threaded PVC Conduit

See Our
Conduit Plug
See page IP27c

See Our
REAMING BITS for
Transition Couplings

See page IP15

Install on Concrete or Masonry Walls

Support Box with Lock Nut

Supports Conduit Runs in Any Direction

Eliminate Metal Box, Hardware, Tape & Labor Cost





Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP13m



PVC Schedule 40 & 80 to Slip PVC to Threaded PVC


Install on Concrete or Masonry Walls

Support Box with Lock Nut

Supports Conduit Runs in Any Direction

Eliminate Metal Box, Hardware, Tape & Labor Cost



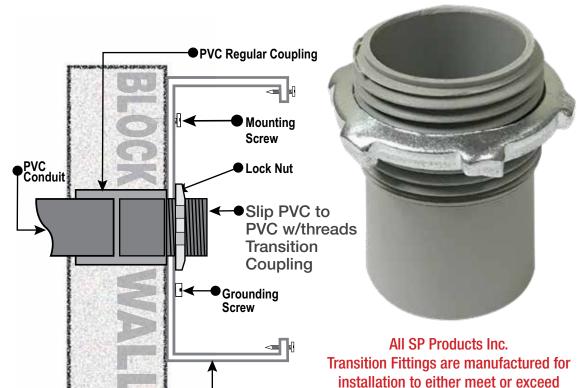

All Boxes

& Wireways

PATENT PENDING

1/2" thru 6"

Transition Couplings UL Listed up thru 2½"	
Size	Catalog #
1/2"	50-SLIP/PVC-T
3/4"	75-SLIP/PVC-T
1″	100-SLIP/PVC-T
1-1/4"	125-SLIP/PVC-T
1-1/2″	150-SLIP/PVC-T
2″	200-SLIP/PVC-T
2-1/2″	250-SLIP/PVC-T
3″	300-SLIP/PVC-T
3-1/2″	350-SLIP/PVC-T
4″	400-SLIP/PVC-T
5"	500-SLIP/PVC-T
6"	600-SLIP/PVC-T

Customer must satisfy all codes and owners' specifications.







in accordance with NEMA TC2, TC3 or

UL 651 specifications



PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



See Our Conduit Plug

See page IP27c

NO

REAMING

NEEDED!

PVC Tapered to Threaded Transition Couplings

to PVC Conduit Exiting Concrete Slab
PVC Schedule 40 & 80

at Least


1 HOUI per
Installation.



Transitions in Less Than 5 Minutes!

Save Cost on the Rigid Nipple, Tape & Labor

Use for Entire Job - Not Just for Repair




1/2" thru 6"


Saves a great deal of time transitioning from PVC conduit to MC Cable conduit above slab without damaging PVC risers and chipping concrete eliminating a concrete repair job!


All SP Products Inc.
Transition Fittings are
manufactured for
installation to either
meet or exceed
in accordance with
NEMA TC2, TC3 or
UL 651 specifications


Transition Couplings	
Size	Catalog #
1/2"	50-PVC-T-THR
3/4"	75-PVC-T-THR
1″	100-PVC-T-THR
1-1/4″	125-PVC-T-THR
1-1/2"	150-PVC-T-THR
2″	200-PVC-T-THR
2-1/2"	250-PVC-T-THR
3″	300-PVC-T-THR
3-1/2″	350-PVC-T-THR
4″	400-PVC-T-THR
5"	450-PVC-T-THR
6"	500-PVC-T-THR

All Above Meet UL651 CSA C22.2, No.85 and US Army Corps Engineers Specifications









Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007 P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595 E: info@spproducts.com • www.spproducts.com

Transition Couplings 3/4" PVC Schedule 40/80



3/4" PVC Schedule 40/80 to Greenfield or MC Cable

Save at Least HOUI per Installation. When Exiting Concrete Slab and Feeding to Load Centers.

Transitions in Less Than 5 Minutes!

Save Cost on the Rigid Nipple, Tape & Labor

Use for Entire Job - Not Just for Repair








Size	Cat#
3/4" x 1	75PVC-38/50 MC
3/4" x 2	75PVC-38/50 MC/DC


Saves a great deal of time transitioning from PVC conduit to Greenfield or MC Cable conduit above slab without damaging PVC risers and chipping concrete eliminating a concrete repair job!

All SP Products Inc. Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications









Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

PVC REDUCERS



PVC SCH 40 & 80

Reduce any size PVC conduit to a smaller size PVC conduit


PVC Sch 40/80 Reducers from 3/4" to 6" any size combination available

Sample of Catalog Number:

75 PVC conduit through 600 PVC conduit - 100 PVC Reducer through 600 PVC Reducer or any size combinations in between.

Example: P/N 200PVC-125PVC Reducer Sch40 = 2" PVC to 1-1/4" PVC Reducer Sch40









Customer must satisfy all codes and owners' specifications.

P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595 E: info@spproducts.com • www.spproducts.com









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE


730 Pratt Boulevard • Elk Grove Village, IL 60007

IP13q

Transition Couplings PVC Bell End Adapter Galvanized Rigid Conduit





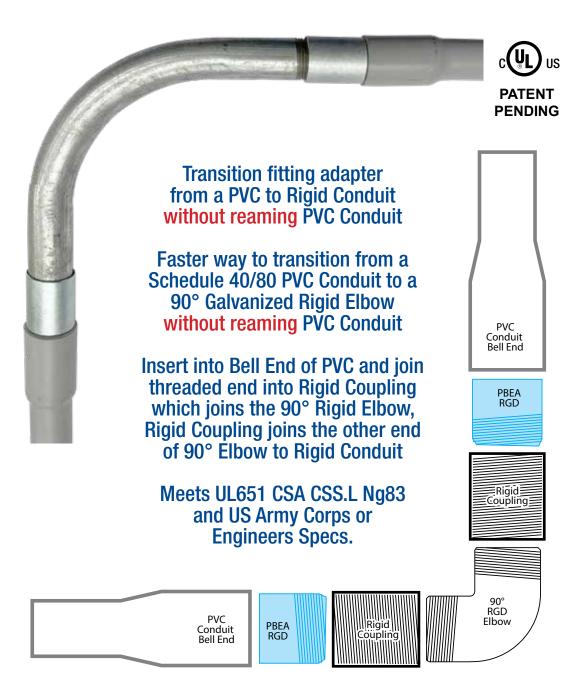



1/2" thru 6"

Transition Couplings	
Size	Catalog #
1/2"	PBEA/RGD 50
3/4"	PBEA/RGD 75
1″	PBEA/RGD 100
1-1/4″	PBEA/RGD 125
1½″	PBEA/RGD 150
2″	PBEA/RGD 200
2-1/2"	PBEA/RGD 250
3″	PBEA/RGD 300
3-1/2"	PBEA/RGD 350
4"	PBEA/RGD 400
5"	PBEA/RGD 500
6"	PBEA/RGD 600

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



MADE IN USA

PVC Bell End Adapter

to **EMT** Conduit



EMT Conduit



PVC Bell End to EMT Transition Coupling

PVC Conduit Bell End Transition fitting adapter from a PVC to EMT Conduit

Faster way to transition from a Schedule 40/80 PVC Conduit to EMT Conduit without reaming PVC Conduit

Insert into Bell End of PVC and Join with EMT Conduit by tightening bolt

Meets UL651 CSA CSS.L Ng83 and US Army Corps or Engineers Specs.



Transition Couplings	
Size	Catalog #
1/2"	PBEA/EMT 50
3/4"	PBEA/EMT 75
1″	PBEA/EMT 100
1-1/4″	PBEA/EMT 125
1½″	PBEA/EMT 150

Transition Couplings	
Size	Catalog #
2″	PBEA/EMT 200
2-1/2"	PBEA/EMT 250
3″	PBEA/EMT 300
3-1/2"	PBEA/EMT 350
4″	PBEA/EMT 400





Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007 P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595 E: info@spproducts.com • www.spproducts.com



PVC Bell End Adapter NEW to Liquidtite Conduit



Liquidtite **PVC Bell End** to Liquidtite Adapter **PVC Bell End**

Transition fitting adapter from a PVC to Liquidtite Conduit

Faster way to transition from a Schedule 40/80 PVC Conduit to Liquidtite Conduit without reaming PVC Conduit

Insert into Bell End of PVC and Join end into Liquidtite Conduit

Meets UL651 CSA CSS.L Ng83 and US Army Corps or Engineers Specs.

1/2" thru 4"

Transition Couplings	
Size	Catalog #
1/2"	PBEA/LIQ 50
3/4"	PBEA/LIQ 75
1″	PBEA/LIQ 100
1-1/4″	PBEA/LIQ 125
1½″	PBEA/LIQ 150
2″	PBEA/LIQ 200
2-1/2″	PBEA/LIQ 250
3″	PBEA/LIQ 300
3-1/2″	PBEA/LIQ 350
4″	PBEA/LIQ 400

All SP Products Inc. Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or **UL 651 specifications**





Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED









Transition fitting adapter from a PVC to Flexible Conduit

Faster way to transition from a Schedule 40/80 PVC Conduit to Flexible Conduit without reaming PVC Conduit

Insert into Bell End of PVC and Join end into Flexible Conduit

Meets UL651 CSA CSS.L Ng83 and US Army Corps or Engineers Specs.



PATENTED

1/2" thru 1-1/2"

Transition Couplings	
Size	Catalog #
1/2"	PBEA/FLEX 50
3/4"	PBEA/FLEX 75
1″	PBEA/FLEX 100
1-1/2″	PBEA/FLEX 150

All SP Products Inc. Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or **UL 651 specifications**

Customer must satisfy all codes and owners' specifications.



Flexible

Conduit

PVC Bell End

to Flexible Conduit Adapter

PVC Bell Fnd







PATENT PENDING PATENTED



Galvanized Rigid
Transition Couplings
to Schedule 40/80 PVC Stub-Up






When Concrete is Poured and Metal Below the Slab is Needed

Transitions in Less Than 5 Minutes!

Save Cost on the Rigid Nipple, Tape & Labor


Use for Entire Job - Not Just for Repair





1/2" thru 6"


Transition Couplings		
Size	Catalog #	
1/2"	50-PVC-R-GRC	
3/4"	75-PVC-R-GRC	
1″	100-PVC-R-GRC	
1-1/4″	125-PVC-R-GRC	
1-1/2″	150-PVC-R-GRC	
2″	200-PVC-R-GRC	
2-1/2"	250-PVC-R-GRC	
3″	300-PVC-R-GRC	
3-1/2"	350-PVC-R-GRC	
4″	400-PVC-R-GRC	
5"	500-PVC-R-GRC	
6"	600-PVC-R-GRC	


All Above Meet UL651 CSA C22.2, No.85 and US Army Corps Engineers Specifications







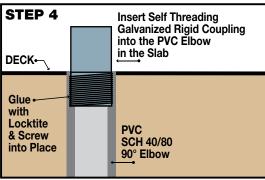

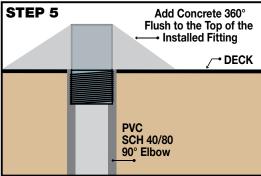

Customer must satisfy all codes and owners' specifications.










PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



Sizes 1/2" thru 6"

Catalog #

PEBA#50 PEBA#75

PEBA#100 PEBA#125

PEBA#150

PEBA#200

PEBA#250

PEBA#300

PEBA#350

PEBA#400 PEBA#500

PEBA#600

Size

1/2"

3/4"

1-1/4"

1-1/2"

2"

2-1/2"

3"

3-1/2"

6"

PVC End Bell Adapter PVC Schedule 40 & 80

Allows Faster Trouble Free Wire Pulls **Use for Entire Job - Not Just for Repair**

Stub Up, Cut Flush to Slab, Ream Out PVC, Glue in End Bell, Cap Conduit for a **Professional Looking Job!**

PATENT PENDING

Qwikduct Templates can be used with all standardized trade size conduit specified per NPA 70 NEC

See Our REAMING BITS for **Transition Couplings**




All Above Meet UL651 CSA C22.2, No.85 and US Army Corps Engineers Specifications







Perfect for use with QwikDuct HDPE Templates for Railway, Highway & Tollway



1. Align QwikDuct close to manhole or vault



2. Ream out conduits and glue on end bell adapters to each conduit inside or outside manhole or vault



3. Slide conduits with bell end adapters thru manhole openings inside or outside manhole or vault

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED






Threaded MADE IN USA End Bell Adapter PVC Schedule 40 & 80







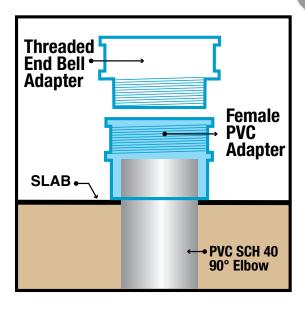



1/2" thru 6"

Catalog #	Size
PEBAT#50	1/2"
PEBAT#75	3/4"
PEBAT#100	1"
PEBAT#125	1-1/4"
PEBAT#150	1-1/2"
PEBAT#200	2'
PEBAT#250	2-1/2"
PEBAT#300	3"
PEBAT#350	3-1/2"
PEBAT#400	4"
PEBAT#500	5"
PEBAT#600	6"

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

Schedule 40 & 80

PVC Reaming Bits for Transition Couplings

1-Piece

Larger sizes available on special order


1/2" thru 6"

1/2" thru 4"

5" & 6" 3/4" Chuck





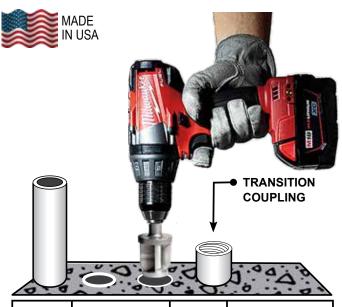

PVC Conduit Size	SCH 40 PVC Catalog #	PVC Conduit Size	SCH 40 PVC Catalog #
1/2″	IPRB50-SCH 40	2-1/2″	IPRB250-SCH 40
3/4″	IPRB75-SCH 40	3″	IPRB300-SCH 40
1″	IPRB100-SCH 40	3-1/2″	IPRB350-SCH 40
1-1/4″	IPRB125-SCH 40	4″	IPRB400-SCH 40
1-1/2″	IPRB150-SCH 40	5"	IPRB500-SCH 40
2″	IPRB200-SCH 40	6"	IPBR600-SCH 40

PLEASE SPECIFY IF USING FOR SCH 40 OR SCH 80

PVC Conduit Size	SCH 80 PVC Catalog #	PVC Conduit Size	SCH 80 PVC Catalog #
1/2″	IPRB50-SCH 80	2-1/2″	IPRB250-SCH 80
3/4″	IPRB75-SCH 80	3″	IPRB300-SCH 80
1″	IPRB100-SCH 80	3-1/2″	IPRB350-SCH 80
1-1/4″	IPRB125-SCH 80	4"	IPRB400-SCH 80
1-1/2″	IPRB150-SCH 80	5"	IPRB500-SCH 80
2"	IPRB200-SCH 80	6"	IPBR600-SCH 80

NO PARTS TO LOSE ON THE JOB SITE!

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

Chamfer Bitsfor SCH 40/80 PVC Conduits




Conduit reaming tool smooths wall of conduit with a 30° chamfer around all 360° of conduit to eliminate sharp edges to prevent wire damage and to receive mandrel for wire pull.


Meets utility requirements.

Tool works for both Shcedule 40 & 80.

1-Piece

Larger sizes available on special order 1/2" thru 6"

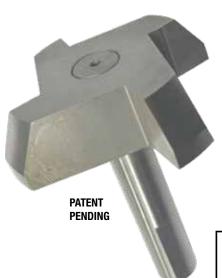

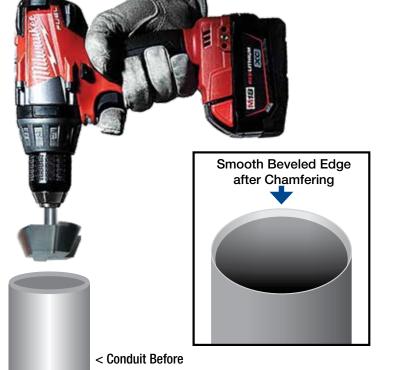

PVC Conduit Size	SCH 40/80 Catalog #	PVC Conduit Size	SCH 40/80 Catalog #
1/2″	CHRB50-SCH 40/80	3"	CHRB300-SCH 40/80
3/4″	CHRB75-SCH 40/80	3-1/2″	CHRB350-SCH 40/80
1″	CHRB100-SCH 40/80	4"	CHRB400-SCH 40/80
1-1/4	CHRB125-SCH 40/80	5"	CHRB500-SCH 40/80
1-1/2″	CHRB150-SCH 40/80	6"	CHRB600-SCH 40/80
2″	CHRB200-SCH 40/80	8"	CHRB800-SCH 40/80
2-1/2″	CHRB250-SCH 40/80		

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



Chamfer Bits



for Aluminum & Galvanized Rigid Conduit

• Deburrs at any location



• Safer, Better & Faster

Works with any type of drill

with 1/2" chuck





Catalog #	Conduit Size
ALCE-50-75-100	1/2″-3/4"-1"
ALCE-125-150	1-1/4"-1-1/2"
ALCE-200-250	2"-2-1/2"
ALCE-300-350	3"-3-1/2""
ALCE-400	4"

Customer must satisfy all codes and owners' specifications.

E: info@spproducts.com • www.spproducts.com









PATENT PENDING PATENTED





No Center Stop Slide On Couplings

Joins Conduit Lengths in Difficult Situations

Allows flexibility of movement for fast, easy installation of conduit in tight, difficult situations.

PATENT PENDING UL LISTED FOR 3/4, 1, 2 & 4 inch UL514B & CSA C22.2 No. 18.3

(other sizes pending)

Completely smooth inside diameter with smooth bottomed adjustable center screw. No sharp edges to damage wire during pull.



- 1. Slide coupling over end of one conduit
- 2. Line up 2nd conduit and mark it to allow coupling to be slid back and centered over both conduits.
- 3. Slide coupling back to mark.
- 4. Tighten 3/8" hex head bolts and conduits are securely joined together at center of coupling.
- 5. Size ½ thru 2 inch = one bolt sizes 2½ and larger = 2 bolts at a 45° angle on each end

SIZE CAT#		SIZE	CAT#
1/2"	1/2" NCSC-50EMT 2"		NCSC-200EMT
3/4"	3/4" NCSC-75EMT 2-1/2		NCSC-250EMT
1" NCSC-100EMT		3"	NCSC-300EMT
1-1/4"	NCSC-125EMT	3-1/2"	NCSC-350EMT
1-1/2"	NCSC-150EMT	4"	NCSC-400EMT

(Rigid Conduit Version Available Soon - Consult Factory)

Prevent Injury and Save Hours

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

Masonry Box Brackets

For 6, 8, 10 & 12 inch depth block walls




Strong 18 Gauge Galvanized Steel



Heat Treated or Stainless Steel also available





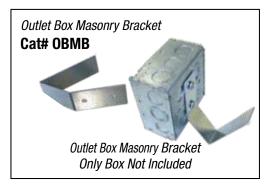

Customer must specify complete catalog numbers when ordering

- Bracket with box and connectors attached available as assembly
- Snaps on Box in seconds and firmly secures it in place.
- Taping available to keep water or mud out of box.

 Eliminate time lost, and code violations when water and mud enter the box plus aggravation when attempting to keep boxes properly aligned with glue, sticks, crushed paper, etc. and not solve the problem.



Masonry Box Brackets			
Box	Depth	Catalog #	
1 Gang	6 inch	1GMBB-6	
1 Gang	8 inch	1GMBB-8	
1 Gang	10 inch	1GMBB-10	
1 Gang	12 inch	1GMBB-12	
2 Gang	6 inch	2GMBB-6	
2 Gang	8 inch	2GMBB-8	
2 Gang	10 inch	2GMBB-10	
2 Gang	12 inch	2GMBB-12	
Outlet	6 inch	OBMB-6	
Outlet	8 inch	OBMB-8	
Outlet	10 inch	OBMB-10	
Outlet	12 inch	OBMB-12	



Customer must satisfy all codes and owners' specifications.










PATENT PENDING PATENTED



Adjustable Back Box Support



Extremely Strong & Fast Installation Snaps Onto Box in Seconds

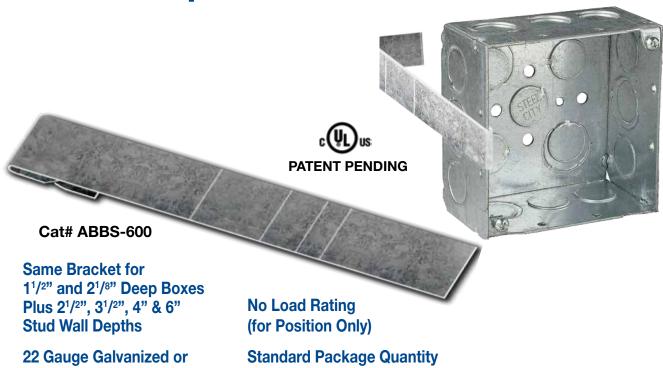

BSB1-FTD

Box

Adjustable Back
Box Support Shown
with our BSB1-FTD
Bracket for Optional use
with Our Wall & Ceiling
Brackets and Standard or
Adjustable Mud Rings.

100 pcs. per Box

Compatible for Use with Our "Big O" and Fixed Position Brackets

Customer must satisfy all codes and owners' specifications.



Stainless Steel







PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



4-Conduit Block



Support From Only One Rod

Threaded Block for Vertical Rod

PATENTED

OR

Threadless Block for Vertical Rod



Specify bolt size 1/4" or 3/8" required for the conduit clamp


ST=(side thread) 1/4" or 3/8"

Bolt Hex Head Slides into Slot

Bolt Hex Head Slides into Slot

Standard Slots 1/4" 3/8" Available Upon Request

PATENTED

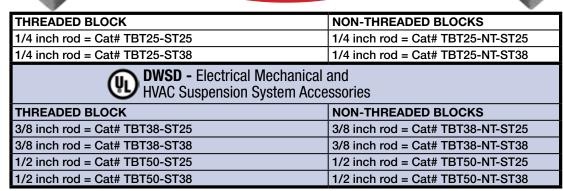











Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED






4-Conduit Block Support From Only One Rod



For Threaded **Vertical Rod** 1/4", 3/8" or 1/2"

Specify Bolt Size 1/4" or 3/8" Required for the **Conduit Clamp**

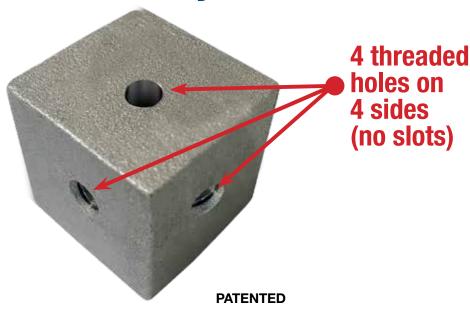







Install larger conduit overhead with our patented 4 conduit threaded support block.

THREADED BLOCK
1/4 inch rod = Cat# TBT25-ST25
1/4 inch rod = Cat# TBT25-ST38
3/8 inch rod = Cat# TBT38-ST25
3/8 inch rod = Cat# TBT38-ST38
1/2 inch rod = Cat# TBT50-ST25
1/2 inch rod = Cat# TBT50-ST38

NON-THREADED BLOCKS
1/4 inch rod = Cat# TBT25-NT-ST25
1/4 inch rod = Cat# TBT25-NT-ST38
3/8 inch rod = Cat# TBT38-NT-ST25
3/8 inch rod = Cat# TBT38-NT-ST38
1/2 inch rod = Cat# TBT50-NT-ST25
1/2 inch rod = Cat# TBT50-NT-ST38

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



Box Support Rod Cubes



Support From Only One Rod

4 thru holes for Gripple applications (RC) 3/8" & 1/4" hole for threaded & non-threaded rod

(ST) 1/4" or 3/8" threaded side hole for threaded rod, clamps or other supports

Non-Threaded Box Support Rod Cubes

1/4 inch Rod = Cat# RC25NT-ST25

1/4 inch Rod = Cat# RC25NT-ST38

3/8 inch Rod = Cat# RC38NT-ST25

3/8 inch Rod = Cat# RC38NT-ST38

Threaded

Box Support Rod Cubes

1/4 inch Rod = Cat# RC25-ST25

1/4 inch Rod = Cat# RC25-ST38

3/8 inch Rod = Cat #RC38-ST25

3/8 inch Rod = Cat #RC38-ST38



Support two conduits with clamps using 1/4" threaded holes on the sides of the Box Support Rod Cubes.



Install 2 boxes back to back with our Box Support Rod Cubes from a single threaded rod.



Compatible with Gripple cable applications to secure light fixtures.



Use Box Support Rod Cubes with J-Hangers

Versatile use for all trades!

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007 P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595

E: info@spproducts.com • www.spproducts.com

IP20a



Support Hangers


for Cable Tray, Pipe, Conduit, Light Fixtures and Other Heavy Equipment


Safer - Better - Faster

Eliminates climbing and working above trusses. Install in seconds while standing on deck below.

CAT#	UPPER CHORD	
THUC 38	3/8" 1,200 lb Static Load Rating	
THUC 50	1/2" 1,200 lb Static Load Rating	

CAT#	LOWER CHORD	
THLC 38	3/8" 1,200 lb Static Load Rating	
THLC 50	1/2" 1,200 lb Static Load Rating	

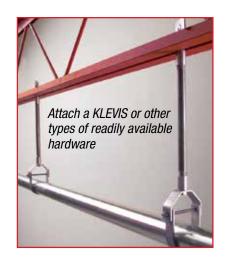

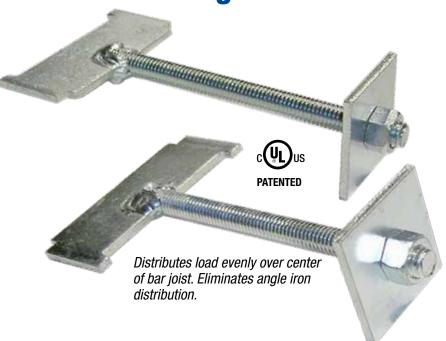

CAT#	KEPS®
THW 38	3/8"
THW 50	1/2"
11100 30	1/2



One piece KEPS® integrated nut/washer firmly locks into chord.

Provides rigid seismic restraint.

Seismic bracing not required when used in top chord applications (9.3.5.3.8 NFPA 13)

Meets UL 514A& CSA C22.2 No. 18.1

Suitable for Supporting Electrical, Fire Suppression, Plumbing, and HVAC Applications in Open Web Bar Joists

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



Works with Our Entire Line of Conduit and Box Support Plates for Fast and Easy Installation

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

Stub Up Slip Coupling



Allows flexibility of movement, slide down over conduit and bolt in place to set Transformers and Gear, Nipple up to Panels etc.

1/2 thru 4 inch Rigid Heavy Wall and PVC Conduit Stubs

SIZE	CAT#
1/2"	SOHWTC 50
3/4"	SOHWTC 75
1"	SOHWTC 100
1-1/4"	SOHWTC 125
1-1/2"	SOHWTC 150
2"	SOHWTC 200
2-1/2"	SOHWTC 250
3"	SOHWTC 300
3-1/2"	SOHWTC 350
4"	SOHWTC 400



Slide on coupling with 5 female threads receive conduit or connectors and 10 male threads for two lock nuts and a ground bushing also available.

- One ³/₈ inch Hex Head Bolt at bottom position for size ½ thru 2 inch Two bolts at a 45° angle for sizes 2½ thru 5 inch
- Bolts can be specifically located at any point to allow greater flexibility

Safer Installation – Save Hours Difficult Jobs are Done in Minutes

Customer must satisfy all codes and owners' specifications.










PATENT PENDING PATENTED




Original Cinch Clamp MADE IN USA **Since 1973 (1)**



- Installed quickly (50% labor savings)
- Competitively Priced
- High strength/heavy duty hot-dipped
- 10-gauge galvanized steel wire.

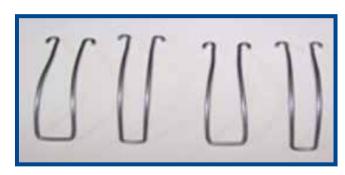

- Only Blade Screwdriver Needed
- Use with all strut type channel
- Securely fits EMT, Rigid, IMC, PVC and pipe
- Also available in stainless steel
- Sizes 1/2 thru 4 inch

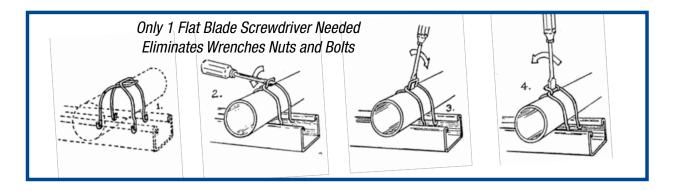

	Original Cinch Load Ratings					
		Cinch Clamp E-100 Electrical Metallic Tubing (EMT)	Cinch Clamp P-200, SS-300 Rigid Metal Conduit (RMC) Intermediate Metal Conduit (IMC)		Cinch Clamp P-200, SS-300 Rigid PVC Conduit	
Trade Size	Metric Designator	LOAD RATING (lb) Horizontal (Alternate Nomenclature)	LOAD RATING (lb) Horizontal P-200 (Alternate Nomenclature)	LOAD RATING (lb) Horizontal SS-300 (Alternate Nomenclature)	LOAD RATING (lb) Horizontal P-200 (Alternate Nomenclature)	LOAD RATING (lb) Horizontal SS-300 (Alternate Nomenclature)
1/2"	(16)	333(E-12)	333(P-12)	333(P-12)	333(P-12)	333(P-12)
3/4"	(21)	100(E-34)	333(P-34)	333(P-34)	333(P-34)	333(P-34)
1"	(27)	333(E-100)	100(P-100)	333(P-100)	100(P-100)	333(P-100)
1-1/4"	(35)	333(E-114)	333(P-114)	333(P-114)	333(P-114)	333(P-114)
1-1/2"	(41)	333(E-112)	100(P-112)	333(P-112)	100(P-112)	333(P-112)
2"	(53)	333(E-200)	100(P-200)	333(P-200)	100(P-200)	333(P-200)
2-1/2"	(63)		333(P-212)	333(P-212)	333(P-212)	333(P-212)
3"	(78)		333(P-300)	333(P-300)	333(P-300)	333(P-300)
3-1/2"	(91)		333(P-312)	333(P-312)	333(P-312)	333(P-312)
4"	(103)		333(P-400)	333(P-400)	333(P-400)	333(P-400)
	Horizontal support intervals are limited to 3.05 m (10 ft) maximum. Suitable for use in plenums.					
	INTENDED MOUNTING ORIENTATION - HORIZONTAL					

Catalog #	Size	EMT OD	PIPE OD	Load	Load SS*
CC-50	1/2"	.706	.840	333 lbs	333 lbs
CC-75	3/4"	.922	1.050	100 lbs	333 lbs
CC-100	1"	1.163	1.315	333 lbs	100 lbs
CC-125	1¼"	1.510	1.660	333 lbs	333 lbs
CC-150	1½"	1.740	1.900	333 lbs	100 lbs
CC-200	2"	2.197	2.375	333 lbs	100 lbs
CC-250	2½"	NA	2.875	NA	333 lbs
CC-300	3"	NA	3.500	NA	333 lbs
CC-350	3½"	NA	4.000	NA	333 lbs
CC-400	4"	NA	4.500	NA	333 lbs

*SS = Stainless Steel

Quick Application Saves Time and Money!

Customer must satisfy all codes and owners' specifications.










PATENT PENDING **PATENTED**



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

Box Support Bracket for **SECTION** Fire Alarm, Speakers, Strobes, etc.

8 Inches on Center (as shown)
12 Inches on Center (available upon request)

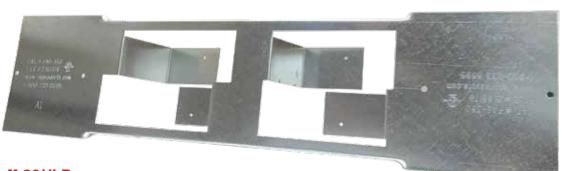

Accepts

3¾" Square X 3¾" Deep, 4" Square X 2½" Deep AND 4" Square X 3¾" Deep Boxes.

Ideal for installing in one or two layers of drywall or when adding paneling.

CAT#
FAB-350 16" thru 24" thru Stud Spacing

16 Gauge Galvanized or Stainless Steel

 Wide Flanges allow supporting boxes in from 15 thru 25 inches stud span.

• Strong 16 gauge galvanized or stainless steel will not bend or bow during installation.

 Quantity discounts and LABOR ONLY ORDERS with wiring assemblies installed (customer supplies material other than SP propriety items) available for greater savings. Save More
Than 30 MINUTES
with a Perfect
Installation
Every Time!



Also available with or without 1 piece 3-1/2" deep red painted boxes

Customer must satisfy all codes and owners' specifications.







Box Available

as a Separate Item



PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

Original "Big O"



Indented Box Support Bracket

Mount Boxes and Move Them to Any Location Between Studs

Save More
Than 30 MINUTES
with Perfectly Level
Installation




CAT#	BIG "0"	Qty/Box	Wt.
Big 0-16	16" Stud Spacing	50	22 lbs
Big 0-24	24" Stud Spacing	50	33 lbs

20 Gauge Galvanized or Stainless Steel

- Built in ruler top and bottom flange marked every ¼ inch allows fast, accurate bench loading
- Mount 4 or 4-11/16" square shallow or deep boxes at any location just loosen two screws to quickly relocate boxes without removing them
- Strong 20 gauge galvanized
- Brackets available with wiring device assemblies attached if components are not specified manufacturers' equals will be supplied.

Mud Ring Sandwiches Box to Bracket

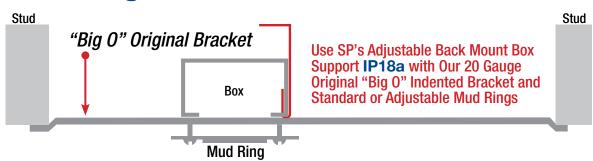

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE




"Big O" Flat



Box Support Bracket for Stud Walls

Flat version allows bracket to be slid left or right over face of studs for adjustment if necessary and installed with only 1 screw at each end plus enables boxes to be slid left or right to any location between studs.

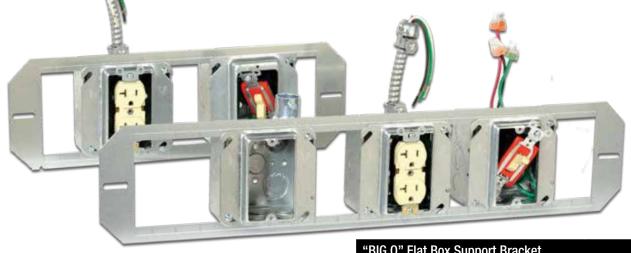

Extra strong 16 gauge galvanized or stainless steel to avoid bending or bowing during installation.

16 Gauge Galvanized or Stainless Steel				
CAT# Description Qty/Box Weight			Weight	
Big 0-16F	16" Stud Spacing	50	22 lbs.	
Big 0-24F 24" Stud Spacing 50 35 lbs.				



- Extra strong 16 gauge galvanized or stainless steel to avoid bending or bowing during installation.
- Install **4", 4** 11/**16" and 5"** square boxes, then quickly slide left or right to any location be-

tween studs.

• Completely flat with NO ¼" returns on top an bottom of entire width or 3/16" deep offsets at each end.

Mud Ring Sandwiches Box to Bracket

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

Dual Wall Box Support

Install Only 1



Save More Than 30 MINUTES with a Perfect Installation **Every Time!**

Slots at each end allows bracket to be slid left or right over face of studs for adjustment and allows installation with only 1 screw at each end

Suitable for 1-1/2" Deep Boxes


Cat# DSBSWB-24 24" Stud Spacing

supports 2 boxes facing opposite directions on each side of a common wall.


Cat# DSBSWB-16 | 16" Stud Spacing

supports 2 boxes on one wall and one in the next room


16 Gauge Galvanized or Stainless Steel

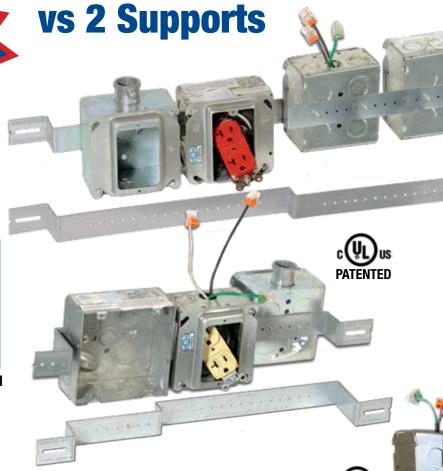

Supports Boxes



- Holes every ½" on center to secure boxes at any location between studs.
- 16 Gauge galvanized or stainless steel



Brackets available with wiring device assemblies per customer's specifications attached.

Assembly Provided all Components are UL Listed WALL

Also Supports

Boxes Vertically UL Listed as a Complete



Customer must satisfy all codes and owners' specifications.









PATENT PENDING **PATENTED**




LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

Box Support Wall Bracket



Slide bracket left or right over studs for adjustment and allows installation with only 1 screw at each end

16 Gauge Galvanized or Stainless Steel

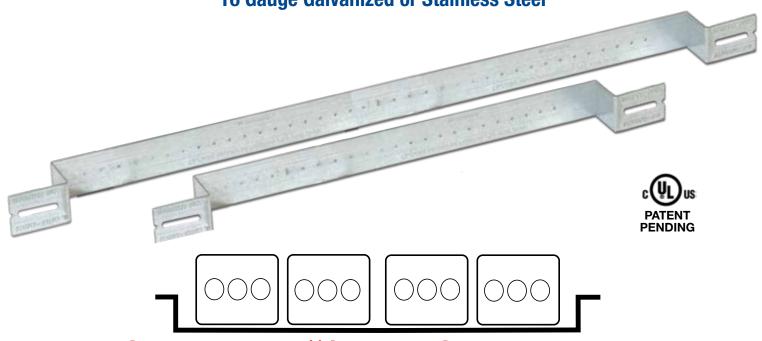

Supports 4", $4^{11}/_{16}$ " & 5" Square Boxes

Suitable for 1-1/2" Deep Boxes			
Cat# CWB-16-178	16" Stud Spacing -1-1/2" Depth		
Cat# CWB-24-178	24" Stud Spacing -1-1/2" Depth		
Suitable for 2-1/8" Deep Boxes			
Cat# CWB-16-218	16" Stud Spacing -1-1/8" Depth		
Cat# CWB-24-218	16" Stud Spacing -1-1/8" Depth		
Suitable for 3-1/2" Deep Boxes			
Cat# CWB-16-278	16" Stud Spacing -3-1/2" Depth		
Cat# CWB-24-278	24" Stud Spacing -3-1/2" Depth		

Customer must satisfy all codes and owners' specifications.

P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595 E: info@spproducts.com • www.spproducts.com









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007

Electro Post EP-10Box Support Bracket




Mounts on all standard stud widths of 2-1/2", 3-5/8", or 6"

MOUNTING INSTRUCTIONS

Step 1

Fold bracket to form square tube post and secure by inserting tabs into slots.

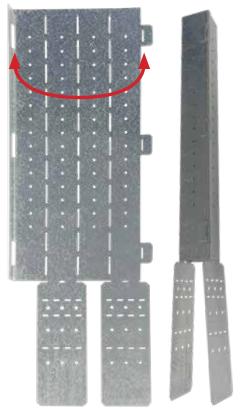





Use with J-Hooks to support low voltage wire runs. **Supports up to 16.5 lbs**



Step 2

Fold bracket mounting flanges to accommodate wall stud width (21/2", 35/8", or 6").

Step 3

Attach box(es) to either side of EP-10 with standard fasteners.

Step 4

Bracket can be loaded with 4", 411/16", square boxes and assembled with boxes and mud rings as required prior to installation (on stud) in prefab shop or on site.

Step 5

Bracket fastened to intended top plate wall stud directly above a vertical stud with (3) #10-16 min 5/8" long Tek screws on each side of bracket to meet UL listing requirements prior to installation of drywall

- Provides uniform height directly above T-Grid Ceiling.
- Reduces electricians working at higher heights on large ladders.
- Easy accessibility thru ceiling to electrical boxes after completion.
- Product ships flat for shipping ease, 50 pcs. per box/20 lbs.
- Made from 24 gauge galvanized or stainless steel.
- Post folds for installation without use of tools.
- Mount electrical boxes to any side of post.

CAT#	BOX SUPPORT BRACKET
EP-10	2-1/2", 3-5/8" & 6" Studs

24 Gauge Galvanized or Stainless Steel (50 pcs. per box) 20 lbs

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED





MADE NUSA Conduit Plug and ID Tag with Hole for Pull String

Protect and Identify Conduit Runs



Prevents mistakes


No debris enters conduit

 Tab allows changing detailed ID several times

 Accommodates three conduit sizes per plug

 Strong, long lasting, and reusable

 Highly visible bright orange only

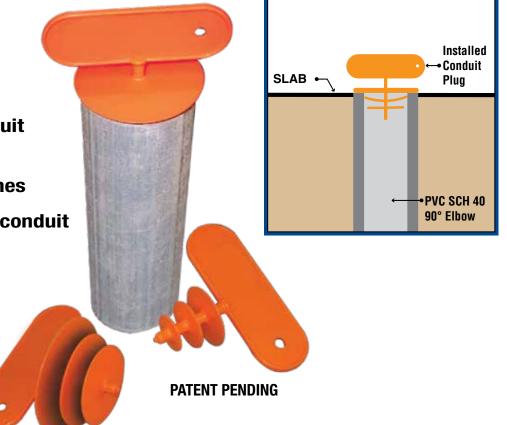

CAT#	SIZE
CP50-75-100	½", ¾", 1 "
CP125-150-200	11/4", 11/2", 2"

Eliminate Problems Plus Save Time and Material on Jobs

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED




LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

Flat Fixed Position 1 Box Support Bracket



Tear drop shaped mounting holes allow fast & perfect installation of boxes without removing box screws.

Flat version allows bracket to be slid left or right over face of studs for adjustment and allows installation with only 1 screw at each end

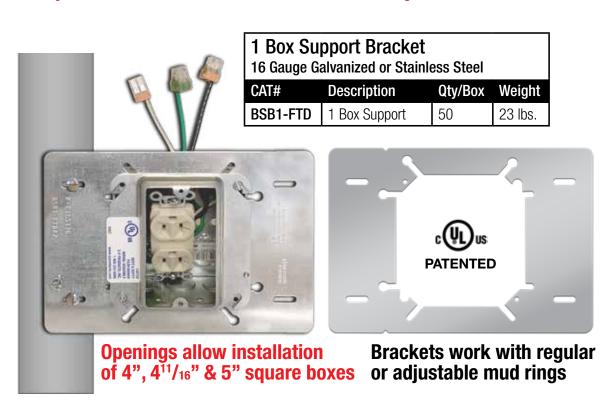

MOUNTING INSTRUCTIONS

- **Step 1** Align bracket center line to the stud height location required.
- **Step 2** Apply #8 self tapping screw pan head or Phillips thru slots to secure to stud.
- Step 3 Bracket can be loaded with 4", 4-11/16" and 5" square boxes and preassembled with boxes and mud rings required prior to installlation (on stud) in prefab shop or on site.

Available With or Without Adjustable Mud Rings

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



Flat Fixed Position 2 Box Support Bracket



Tear drop shaped mounting holes allow fast & perfect installation of boxes without removing box screws.

Flat version allows bracket to be slid left or right over face of studs for adjustment and allows installation with only 1 screw at each end

2 Box Support Bracket 16 Gauge Galvanized or Stainless Steel

CAT#	Description	Qty/Box	Weight
BSB2-FTD	2 Box Support	50	49 lbs.



Mount boxes on both sides of stud...

...Or mount boxes on studs 16" – 8" on center



Openings allow installation of 4", 411/16" & 5" square boxes

Brackets work with regular or adjustable mud rings

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED




LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE


Flat Fixed Position 3 Box Support Bracket



Tear drop shaped mounting holes allow fast & perfect installation of boxes without removing box screws.

Flat version allows bracket to be slid left or right over face of studs for adjustment and allows installation with only 1 screw at each end

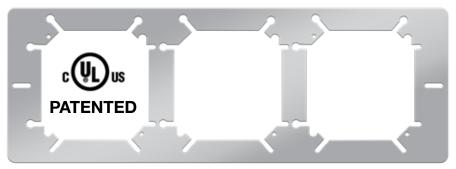

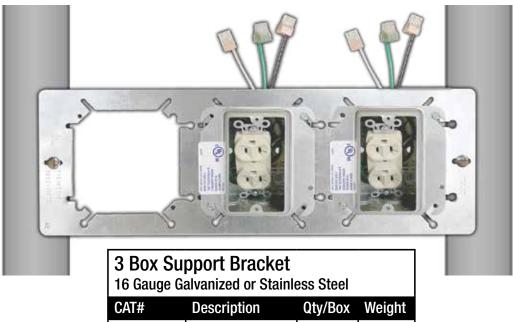

Openings allow installation of 4", 411/16" & 5" square boxes

BSB3-FTD

Brackets work with regular or adjustable mud rings

34 lbs.

Customer must satisfy all codes and owners' specifications.





3 Box Support

16" Stud Spacing



50



PATENT PENDING PATENTED



Flat Fixed Position 4 Box Support Bracket




Tear drop shaped mounting holes allow fast & perfect installation of boxes without removing box screws.

Flat version allows bracket to be slid left or right over face of studs for adjustment and allows installation with only 1 screw at each end



4 Box Support Bracket 16 Gauge Galvanized or Stainless Steel

CAT#	Description	Qty/Box	Weight
BSB4-FTD	4 Box Support 24" Stud Spacing	25	29 lbs.
	= : Stara Opaomig		

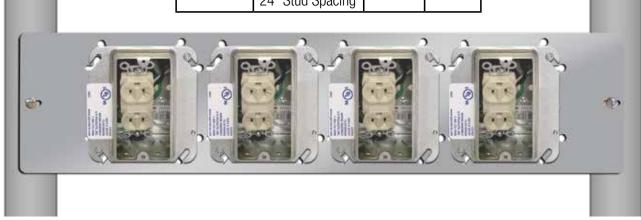

Openings allow installation of 4", 411/16" & 5" square boxes

Brackets work with regular or adjustable mud rings

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



Custom Mounting Plates





Allow fast perfectly located down lights, boxes or other highly repetitive applications above vanities, desks, etc.

Attach to wall, Hard Lid or T Bar ceilings & quickly drop-boxes, fixtures, etc. in later.

Avoid time consuming repetitive measurements for each installation.

Galvanized Steel



Boxes, mounting bolts, etc. welded to plate to prevent unauthorized access in high security areas:

- Prisons
- Hospitals
- Courthouses



Post Light Base 3/4 inch thick stainless steel

Ganged Boxes

- · Eliminate costly time consuming measuring and possible mistakes
- All plates have rounded corners for safer handling and installation.
- Any configuration & gauge galvanized or stainless steel with any size mounting holes, slots, etc at specified locations Available on special order.

Excellent Quality at Competitive Prices Tell Us What You Need -We'll Make It!

Customer must satisfy all codes and owners' specifications.









PATENT PENDING **PATENTED**



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

Slicknut




Bushing Adapters for Pulling & Grounding Wire

IP30a

THREADED GROUND BUSHING

Threaded Ground Bushing
CAT# TGB 50-400 Series



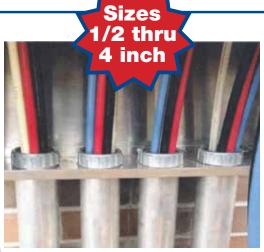

(Standard Qwik Nut includes 1 Lug)

Must install 3 Lugs for UL Listing,
extra lugs sold separately.

Consult Factory for prices and availability

IP30b

THREADLESS GROUND BUSHING

Threaded Ground Bushing
CAT# NTGB 50-400 Series



Rounded edge prevents damage to wire during pulls
Threadless versions for use with heavy wall and thin wall conduit
3 Holes 120° on centers to receive tapped lugs

Threaded Ground Bushing CAT# NTGB 50-400 Series



SLICKNUT SOCKET TOOL

Socket to securely install Slicknut bushings



Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007 P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595

E: info@spproducts.com • www.spproducts.com

IP30

Slicknut



Bushing Adapters for Pulling Wire

IP31a

THREADED PULL BUSHING

Threaded Ground Bushing
CAT# TPB 50-400 Series





(Standard Qwik Nut includes 1 Lug)
Must install 3 Lugs for UL Listing,
extra lugs sold separately.
Consult Factory for prices and availability

IP31b

THREADLESS PULL BUSHING

Threaded Ground Bushing CAT# NTPB 50-400 Series



Rounded edge prevents damage to wire during pulls
Saves time when pulling branch & feeder wire
Serrated edge on under side of bushing serve as locknut
Split plastic bushing also serves as locknut
Install one with every connector

Threaded Ground Bushing CAT# NTGB 50-400 Series



SLICKNUT SOCKET TOOL



Socket to securely install Slicknut bushings

Customer must satisfy all codes and owners' specifications.

E: info@spproducts.com • www.spproducts.com









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007 P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595

IP31



EZ Hangers in T Bar Ceilings



For Down Lites, Speakers, Exit Signs, etc.






CAT# BOX SUPPORT BRACKET


2B1 2 Foot (24" on Center) T Bar
Sold in Pairs


4B1 4 Foot (48" on Center) T Baar
Sold in Pairs

- Extremely strong 22 gauge galvanized steel with a 50 lb load rating.
- No extra parts to drop or lose.
- 2 mounting holes each 1-½ inch from center mark to quickly mount speakers or other devices in center of tile plus one at each end for supporting to structure independently of T Bar per IFFX Luminaire Fittings Standard.









Slide hangers with box or fixture housing attached along T Bar

Slide fixture housing, boxes, etc. in other direction along hangers to location required

Bend tabs in to lock in place

Eliminate Labor Intensive Cutting & Tieing Down Lathers Channel, Black Iron, Conduit, etc.

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

Plain Mounting Brackets for T Bar Ceilings MADE IN USA



Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

Vertical, Ceiling Adjustable MADE IN USA **Bar Hanger Assembly**





Customer must satisfy all codes and owners' specifications.









PATENT PENDING **PATENTED**



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007 P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595 E: info@spproducts.com • www.spproducts.com

IP34

Custom Engraved



Nameplates & Labels

For Electrical and Mechanical Identification



- Extensive experience labeling complex redundant base building systems in data centers (tenant labels for PDUs, FDCs, RPPs, cabinet rows, server racks, power strips) and hospitals.
- Laser engraved stainless steel, aluminum and plastic signs with vinyl lettering also available.

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED






Also Available with larious Lengths of **Galvanized Steel Strut Attached**

Roof Top Blox Roof Conduit Support Safer, Lighter and Faster!

EXTREMELY COMPETITIVE PRICING

Eliminates cutting and hauling, expensive treated lumber or heavy rubberized supports up to roof.

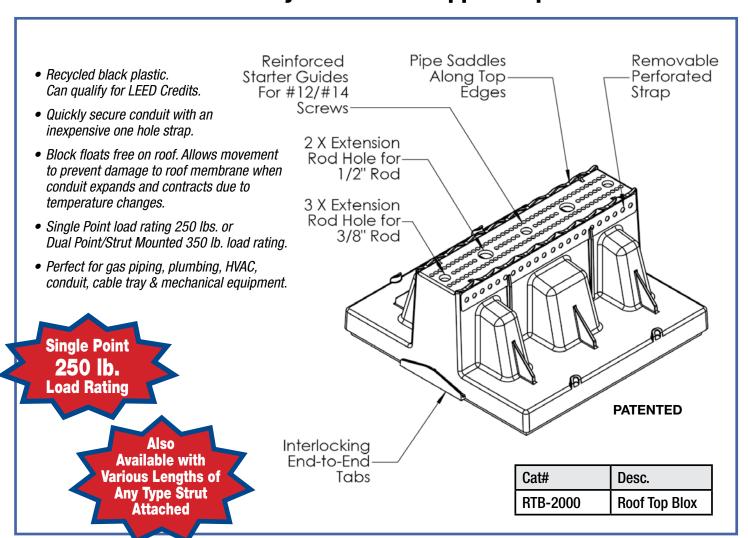

For Electrical, Plumbing, HVAC, etc.







PATENT PENDING **PATENTED**




LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

Prefab Assemblies



for Data Power Distribution Units

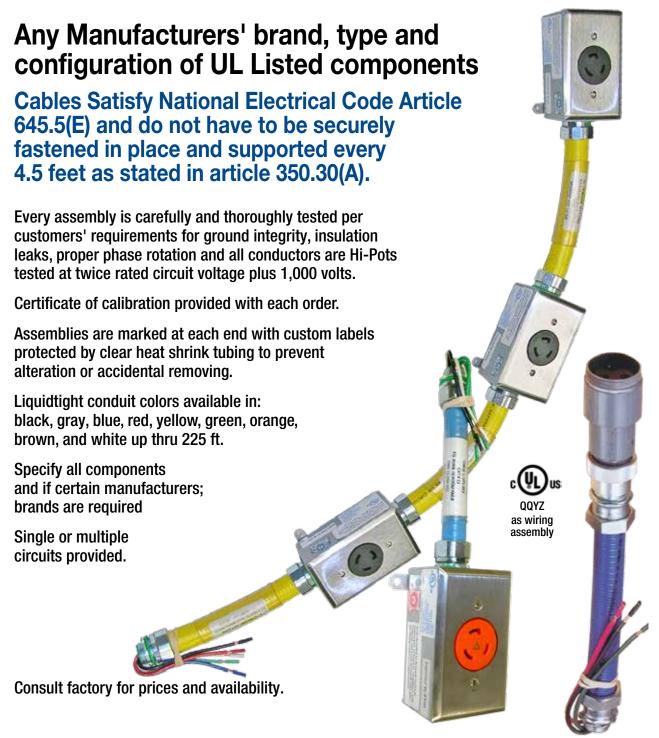

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE




E: info@spproducts.com • www.spproducts.com

Prefab Assemblies



Let SP be Your Prefab Shop with NO INVESTMENT on Every Day Jobs Throughout the Year

PLUS...Compete Aggressively and Win Larger Jobs with More Profit

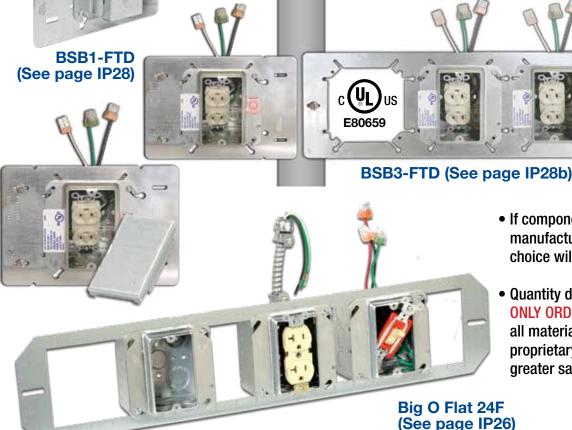

- If components are not specified, manufacturers equals of our choice will be supplied
- Quantity discounts and LABOR ONLY ORDERS (customer supplies all material other than SP proprietary items) available for greater savings

PLUS An Unlimited Variety of Other Applications



Assemblies available with 1 or 2 gang Strong Steel Snap On/Off Protective Covers



PATENTED E185948

Protective Covers also sold separately (see pg TE-1)

All units carefully inspected, marked and packed to guarantee quality plus minimize handling in the shop or field.

Customer must satisfy all codes and owners' specifications.

E: info@spproducts.com • www.spproducts.com









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



PFA2

Prefab Assemblies



Let SP be Your Prefab Shop with NO INVESTMENT on Every Day Jobs Throughout the Year PLUS...Compete Aggressively and Win Larger Jobs with More Profit







Later during the job when correct whip lengths are known, connect whip leads to device leads extending out of box with Wago type push-on or live spring wire nuts and feed all wires through open KO back into box until whip is attached to box with a snap on connector attached on its end.

20 Amp - CRB5362 Cat# MC PF 1-R

Protective Covers
Available Separately
1 GANG = SOC-1G
2 GANG = SOC-2G
(see pg TE-1)

...OR EMT Conduit

- 1. Run conduit to correct KO location in box.
- 2. Drop mud ring with device that is firmly attached to green ground screw in box.
- 3. Feed wires through conduit and connect them to device leads with Wago type push-on or live spring wire nuts.
- 4. Install mud ring with device back onto box.

Above assembly includes the following components

- 1- 4 square 1/2" 3/4" KO x 2 1/8 deep box
- 1- 1 gang x 5/8" raised mud ring
- 1- 20 A specification grade CRB5362 back & side wired device tucked in or attached to mud ring
- 1- Single box support 16 gauge BSB1-FTD (IP28)

- 1- #12 stranded 8 inch pigtail grounded to box
- 3- #12 THNN stranded 8" long any color wire leads each with Wago push on quick connector or live spring wire nuts attached.
- 1- One or two gang protective cover (shown above) attached to mud ring.

Also Available without wiring devices and with any Type, Combination and Manufacturers Brand Components. If not Specified SP will Supply Equals.

Labor only orders also negotiated

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

PFA3

Adjustable Depth Mud Rings for 4 Square Outlet Boxes





Meets UL514 & CSA C22.2 No. 18.1

Prevent Costly Depth Problems SAVE a Great Amount of Time

1 Gang Cat# 1GADJMR-58-125 Cat# 1GADJMR-75-150



Cat# 2GADJMR - 2 Gang



Adjusting screws NOT covered by drywall.

Eliminates lost time and damage to drywall when chipping out to expose adjusting screws.



Cat# 3GADJMR - 3 Gang



Provides complete flexibility to quickly allow perfect alignment of devices

Customer must satisfy all codes and owners' specifications.







PATENT PENDING PATENTED



Grounding Pigtails All Colors and Versions Available



Set Screw #12 THHN x 8"

Solid Cat# 12SOL-8-SC Stranded Cat# 12STR-8-SC

Ring #12 THHN x 8"

One End Stripped #12 THHN x 8"

Solid Cat# 12SOL-8-1ES

Stranded Cat# 12STR-8-1ES

Both Ends Stripped #12 THHN x 8"

Stranded Cat# 12STR-8-RT



Solid Cat# 12SOL-8-2ES Stranded Cat# 12STR-8-2ES

Fork/Spade #12 THHN x 8"

Stranded Cat# 12STR-8-FT

Ring End/Push On #12 THHN x 8"



Stranded Cat# 12STR-8-WA-RT

Custom Wire Leads



Green Ground Set Screw



Push On Type UL Listed for 600 volt - 20 amp



Ring Terminal



Spade or Fork **Terminal**

(insulated or uninsulated)

An unlimited variety of configurations with or without any type of above connectors, terminals, etc. attached at one or both ends, and in any type insulation, size, length, color, plain, or striped etc., solid or stranded wire are available. Consult Factory.

Excellent quality with fast delivery at extremely competitive prices

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



PFA5

Vertical, Ceiling Adjustable MADE IN USA **Bar Hanger Assembly**





Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007 P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595 E: info@spproducts.com • www.spproducts.com

PFA6



MADE IN USA Snap On/Off


Adjustable and Reusable Protective Covers

SAVE a great amount of time and money on all outlets for jobs throughout the year!

Description	Catalog #
1-Gang	SOC-1G
2-Gang	SOC-2G
3-Gang	SOC-3G








- Covers suitable for all manufacturers' brands including adjustable mud rings.
- Device cover is used for protection of wiring devices prior to energizing circuit.



1-Gang = SOC-1G **PATENTED**



2-Gang = SOC-2G PATENTED



Also suitable when wire devices are connected to leads and tucked into back of deep boxes

Customer must satisfy all codes and owners' specifications.

E: info@spproducts.com • www.spproducts.com









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE




TE1



MADE IN USA Rigid Pipe Joiner


Spins 10 Foot Lengths Together in Under 10 Seconds with Less Chance of Injury

Catalog #	Size
PS125	11/4"
PS150	11/2"
PS200	2"
PS250	21/2"
PS300	3"
PS350	3½"
PS400	4"
PS500	5″
PS600	6"

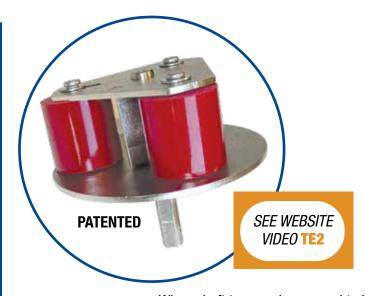

- When shaft turns, grips expand to lock on inside of conduit and spin it 360° to join the entire 10 foot length into the preceding coupling. Drill can be reversed to disconnect conduit.
- Eliminates labor intensive ropes or chain and heavy hard to handle strap wrenches.
- Spinners available in sets at reduced prices or sold separately.

WHEN USING CUTTING OIL. REMOVE WITH A PROPER SOLUTION. DO NOT INSERT ANY FOREIGN MATERIALS IN AN ATTEMPT TO PREVENT SLIPPAGE.

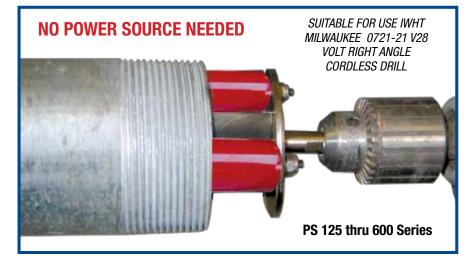

Prevents Damage to Inside and Outside of Conduit - Especially PVC Coated

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



MADE IN USA Lamp Guard

With Built in Socket and Leads for Temporary Lighting in Stairwells or Poured in Place Concrete Locations, etc.



MOUNT TO BOXES

High Quality 250 Volts 660 Watts Rated **UL Listed Socket**

For Incandescent Bulbs, **Fluorescent Bulbs & Led Lights**

Fits on 3/0 Mud Ring **Single Gang Mud Ring** 3/0 & 4/0 Octagon Boxes

- Safer, extremely FASTER installation.
- Eliminates all expensive exposed wire which often has to be scrapped later.
- Attach each lamp directly to power in box to use only where light is needed.
- · Built-in slots allow fast installation and removing guard from outlet box.
- Design no wider than a plaster ring allows wall finishers to apply materials without having to remove the fixture.
- One time installation. Not removed until job is completed.
- Strong and Durable High Quality.
- Non-Flammable Delron Material.
- Dimensions 5-3/4" H x 3-1/8"W

High Quality Non-Flammable Delron Material

Customer must satisfy all codes and owners' specifications.










PATENT PENDING PATENTED




LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE


Poly Foam Box Insert MADE IN USA



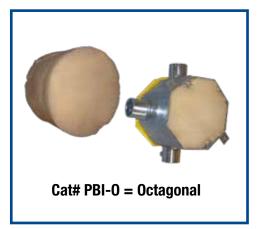



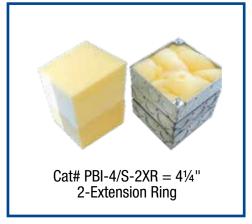








- Prevents Concrete from **Entering Boxes**
- Fast and Easy to Install
- Reusable for 8 or more applications



- Saves Over 5 Minutes, **Plus Cost of Tape**
- For All Types of Boxes on **Poured in Place Concrete Jobs**

Traditional Method of Taping Box to Keep Out Concrete During Pour

Available in a Wide Variety of Other Configurations Consult Factory for more Information

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED







PATENT PENDING

Cut'N'Catch NEW!



Only 1 worker needed to cut any type conduit, strut, threaded rod up thru 6" size



- Portable, use anytime, anywhere on job sites & prefab shops
- Ideal for all trades: Electricians. Plumbers, HVAC, Carpenters, etc.
- Accommodates any length of conduit, strut, threaded rod, etc.
- "Claws" secure bandsaw and protect from expensive damage by falling
- · Allows for a cleaner cut and eliminates burrs - NO FILING required
- Securely clamps any length material safely in place for cutting
- Catches cutoff in V-Glides to keep pieces off the ground

Eliminates the dangerous "Captain Morgan" method! **BOTH** hands remain free to operate bandsaw.

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED




LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

SCH 40 & 80

PVC Reaming Bits

for Transition Couplings



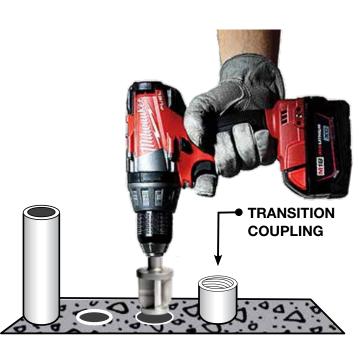

1-Piece
Larger sizesavailable on special order

PATENT PENDING

High Quality Steel Sharpenable for Long Life

PVC Conduit Size	SCH 40 PVC Catalog #	PVC Conduit Size	SCH 40 PVC Catalog #
1/2″	IPRB50-SCH 40	2½″	IPRB250-SCH 40
3⁄4″	IPRB75-SCH 40	3″	IPRB300-SCH 40
1″	IPRB100-SCH 40	3½″	IPRB350-SCH 40
1¼″	IPRB125-SCH 40	4″	IPRB400-SCH 40
1½″	IPRB150-SCH 40	5"	IPRB500-SCH 40
2″	IPRB200-SCH 40	6"	IPBR600-SCH 40

PVC Conduit Size	SCH 80 PVC Catalog #	PVC Conduit Size	SCH 80 PVC Catalog #
1/2″	IPRB50-SCH 80	2½″	IPRB250-SCH 80
3⁄4″	IPRB75-SCH 80	3″	IPRB300-SCH 80
1″	IPRB100-SCH 80	3½″	IPRB350-SCH 80
1¼″	IPRB125-SCH 80	4″	IPRB400-SCH 80
1½″	IPRB150-SCH 80	5"	IPRB500-SCH 80
2″	IPRB200-SCH 80	6"	IPBR600-SCH 80

1/2" & 4" = 1/2" Chuck

5" & 6" = 3/4" Chuck

NO PARTS TO LOSE ON THE JOB SITE!

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



Chamfer Bits

MADE IN USA

for SCH 40/80 PVC Conduits

Conduit reaming tool smooths wall of conduit with a 30° chamfer around all 360° of conduit to eliminate sharp edges to prevent wire damage and to receive mandrel for wire pull.

Meets utility requirements.

Tool works for both Shcedule 40 & 80 .


1-Piece

Larger sizes available on special order 1/2" thru 6"



1/2" thru 4"

5" thru 8" 3/4" Chuck

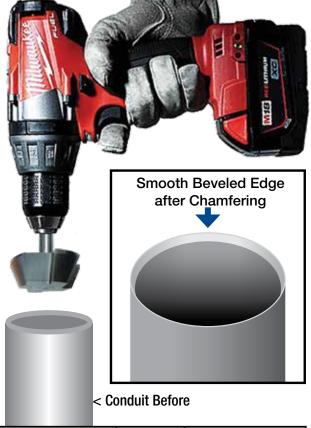

NEW

PVC Conduit Size	SCH 40/80 Catalog #	PVC Conduit Size	SCH 40/80 Catalog #
1/2"	CHRB50-SCH 40/80	3"	CHRB300-SCH 40/80
3/4″	CHRB75-SCH 40/80	3½″	CHRB350-SCH 40/80
1″	CHRB100-SCH 40/80	4"	CHRB400-SCH 40/80
1¼″	CHRB125-SCH 40/80	5"	CHRB500-SCH 40/80
1½″	CHRB150-SCH 40/80	6"	CHRB600-SCH 40/80
2″	CHRB200-SCH 40/80	8"	CHRB800-SCH 40/80
2½″	CHRB250-SCH 40/80		





P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595 E: info@spproducts.com • www.spproducts.com





PATENT PENDING PATENTED




Chamfer Bits

for Aluminum & Galvanized Rigid Conduit

- Deburrs at any location
- Provides smooth chamfer
- Safer, Better & Faster
- Works with any type of drill with 1/2" chuck



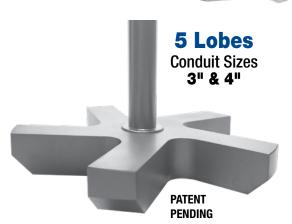



ALCE-300-350 ALCE-400 4"

Conduit Size

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2"-3/4"-1"

1/2" thru 4"









PATENT PENDING PATENTED




Live Panel Lockout Brackets



Extremely Safe – Save Time Everyday



Locks & keys for brackets sold separately. Consult Factory for additional cost.

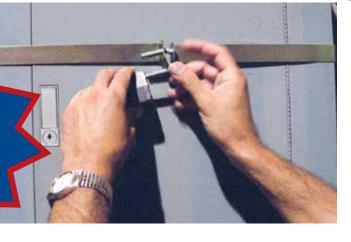

- On/Off in seconds
- Lock it to Eliminate entry by unauthorized personnel
- Brackets sold in pairs

- Locks and keys sold separately
- Two holes provided on each piece for two locks
- Strong 18 gauge zinc plated steel, reusable with long life

Common Sizes

LOB 20" wide panel

LOB 36" wide panel

LOB 40" wide panel

An unlimited variety of other panel widths available.

FOR USE AS AN ACCESS DETERRENT – NOT FOR PROTECTION AGAINST ELECTRICAL SHOCK!

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



Live Panel Temporary Covers



Provide Protection for Construction Workers, Visitors, and Tenants



20" X 48" Cat# TPC 20 X 48 14" X 48" Cat# TPC 14 X 48 Other sizes available on special order

ON/OFF in Seconds Highly Visible – Improves Image on Jobsite

Non-Conductive Magnets Securely Fastens Cover to Panel

Panels available with pre-drilled holes for nuts, bolts and washers to securely attach panel. Customer must specify size and exact locations required. Covers also available with nuts, bolt and washers installed.

ANSI Z535.1, ANSI Z535.2, ANSI Z535.3, ANSI Z535.4, ANSI Z535.5, ANSI Z535.6

For Use as an Access Deterrent – Not For Protection Against Electrical Shock!

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



Portable Cable Pullers for Power, Data, etc. in Light Poles



- Quickly Attach to Hand Hole of Each and Pull Wire All While Standing Ground to Reduce Chance of Injury
- Use in Sets of Two
- Eliminate Damage to Poles and Wire
- Extremely Safer and Faster



2 Electricians Walked from Pole to Pole and Pulled Over 52,000 Feet of #4 Cable in One Day or Only 16 Total Hours!

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED




Anchor Bolt Templates



Extremely Fast, Accurate Installation For Light Poles, Beams, etc.







A 1/4" hole can be provided on end of each wing upon request for fast and secure insallation of the template to sonotube before the concrete pour

- Rulers on all 4 wings allow drilling same bolt diameter holes for 5½ thru 25 inch four bolt circle patterns.
- Color code templates for each bolt diameter and drill different circle patterns from job to job.
- Embedded divots ensure accuracy when drilling.
- Deep recess in back allows leveling nut to be free of concrete.
- Strong extremely long-lasting non-corrosive ABS plastic.

Eliminate constantly purchasing and fabricating expensive plywood.

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



PVC Conduit BenderPortable – No Power Needed!



Use Anytime – Anywhere – On Job Site Eliminates expensive Hot Boxes, Heat Blankets, Generators, etc. Up Thru 6 Inch Schedule 40 & 80



ONE FREE Bender Supplied for every \$100,000 of Qwik Duct Templates, End Bells and/or Transition Couplings ordered. Orders can be asssorted and accumulated for a maximum period of 12 months from date of first order. If Bender's are not available and customer achieves above goal he will receive a 2% credit on Template, End Bell and/or Transition Couplings purchases during the period. Customer must accept this offer with a dated signed agreement.

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

Dry Wall Cut Out Templates



Allow Fast, Perfectly Spaced and Level Cut Outs with NO DAMAGE to Drywall

Cat# COT100
PATENTED





- Two levels provided for perfect horizontal and vertical alignment
- Center lines provided for accuracy especially when ganging cut outs
- Clear see thru blue polycarbonate material

Allows tracing all box and screw openings.





Extremely Strong and Durable, Save Hundreds of Dollars Every Year

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED





PATENT PENDING

Assemble PVC conduits in a Duct Bank on a job site or prefabusing the PVC Driver with a Hammer Drill to join 2 pieces of PVC conduit in a matter of seconds.

PVC Driver eliminates extra tools and allows for a clean and safe installation with less labor.

Insert PVC Driver into Hammer Drill and drive PVC Conduit into place with this light weight aluminum tool for

SAFER, BETTER, FASTER jobs.












PATENT PENDING PATENTED





EMT Conduit Layout Syste consi

for perfectly spacing panel knock-outs

This NEW EMT Conduit Knock-Out System makes layout simple and fast with consistent professional looking results every time!

Available in sizes 1/2" up to 4" EMT OR 2" and above for RGD.

For both 7/8" and 1-5/8" strut heights.

PATENTED



Step 1: Measure




Step 2: Mark



Step 3: Drill



Step 4: Install

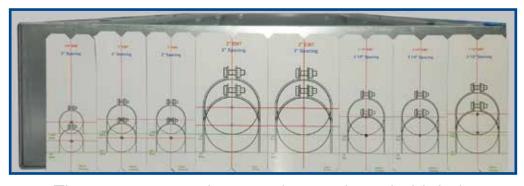

The pre-measured magnetic templates hold their position, enabling easy layout of all conduits, on J-Boxes, Panels or Cabinets.

Catalog #	EMT Size	RGD Size	Desc.
CLT-50	1/2″	-	4 Pcs.
CLT-75	3/4"	-	4 Pcs.
CLT-100	1"	-	4 Pcs.
CLT-150	1-1/2""	-	4 Pcs.
CLT-200	2"	2"	2 Pcs.
CLT-250	2-1/2"	2-1/2"	2 Pcs.
CLT-300	3"	3"	2 Pcs.
CLT-350	3-1/2"	3-1/2"	2 Pcs.
CLT-400	4"	4"	2 Pcs.









PATENT PENDING PATENTED





Terms & Conditions

ALL PRICES ARE SUBJECT TO CHANGE WITHOUT NOTICE

- Cash Discount 2% 10 Days, Net 30. F.O.B. Factory, Elk Grove Village, IL 60007
- 2. Freight allowed on \$3,500 or more of all products other than Duct Bank Templates, EZ Pull Wiring Harnesses, Econo Whips, and all types of Prefabricated Assemblies
- 3. Freight on Duct Bank Templates, EZ Pull Wiring Harnesses, all of Econo Whips, Prefabricated Assemblies is negotiated on an individual order basis. If freight requirements are met on orders for these products, any quantity of all other products shown on price sheet, may be Included to become freight allowed.
- 4. Terms apply on one shipment to one location within the continental USA. For Alaska, Hawaii, Puerto Rico and else where, consult factory.

- 5. 50% restocking charge plus freight charges both ways, on all products other than specials noted in paragraph 3 & 4 above provided material is in saleable condition based on our inspection. No returns accepted if purchase order is older than 1 year.
- 6. All types of wiring harnesses including harnesses in all types of flexible conduit, twisted or striped wire, Qwik Duct Custom Templates, prefabricated boxes with wiring devices installed and all other prefabricated products are absolutely not returnable.
- 7. Customer can order any piece quantity.

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



#17

IP21a

OwikBlock

(II) DWSD

PRODUCTS, INC. Productivity and value thru ideas




J-Hook

We're Proud to be the Electricians' Friend for Over 50 Years!



IP20a
Box Support
Rod Gubes













For more information visit our website at SPProducts.com

Plus More Being Invented for SAFER BETTER FASTER Jobs . . . Call With Your Ideas!