

We're Proud to be the Electricians' Friend for Over 50 Years!



Plus More Being Invented for SAFER BETTER FASTER Jobs . . . Call With Your Ideas!

SLIP COUPLINGS

NO REAMING NECESSARY

Glues into standard PVC

PVC BELL END

ADAPTERS

NO REAMING

NECESSARY

TAPERED COUPLING

ADAPTERS

REAMING

NECESSARY

GALVANIZED RIGID

SELF THREADING

ADAPTER

REAMING NECESSARY

Schedule 40/80

- To care for our country, industry and electricians by encouraging everyone to buy and install quality made in U.S.A. innovative products for SAFER – BETTER – FASTER jobs.
- **2.** Provide opportunity with fair compensation for current and future generations in this country.
- **3.** Develop and promote products that help accomplish these goals.
- **4.** Be the electricians' friend by providing them the satisfaction of making a valuable contribution to the industry plus receiving fair compensation for their ideas.
- **5.** Provide excellent quality and service with competitive pricing.

For more information, samples, literature, product meeting, quotation or to place an order call us. Also, if you have ideas for products we'll help you patent & market them plus pay you an excellent royalty.

Mikel Bishka	Prefab & Quotation Mgr. mikelb@spproducts.com	Cell (815) 353-5500
Suresh Patel	Production Manager sureshp@spproducts.com	Cell (224) 659-3814
Paul Vrame	Vice President paulv@spproducts.com	Cell (815) 451-6335
Gary Wombough	Eastern Regional Mgr. gwombo@spproducts.com	Cell (443) 253-6142
Rhodney Honeycutt	Southeast Regional Mgr. r@rhoneycutt.com	Cell (828) 381-2395
Michael Barron	Factory Area Sales mbarron@spproducts.com	Cell (312) 659-5972
Georgia Kraemer	Administration georgiak@spproducts.com	Office (800) 233-8595
Tom Lowe	Engineering/Quality Control thomasl@spproducts.com	Office (800) 233-8595
Tim Graham	Warehouse Manager timg@spproducts.com	Office (800) 233-8595
Ana Silva	Administrative Asst. asl@spproducts.com	Office (800) 233-8595

SP Products' philosophy and dedication to making valid contributions to the industry began with

"Econo Whips"

Originated in 1966...










..Our Whip Machine in 1969

- Any size, length, type steel or aluminum flexible conduit, MC Cable, Liquidtite, Cord Romex, etc. with any type connectors attached
- · Specify components required.
- · Conductors stripped
- · Locknuts secured rubber bands



...Plus Numbered and/or Lettered Bundled Wire for Power, Controls, Voice & Data in 1983





And 1997 Harnesses in Flexible Conduit

We Can Make an Unlimited Variety of Special Products to Help You Solve Problems to be Safer and More Profitable!







PATENT PENDING PATENTED



TABL	E OF CONTENTS		
Wire A	ssemblies	Installed	Product
EZ1-la	EZ Pull/EZ Read Home Runs, Networks, Round Robins, Full Boats	Slip Fit PVC to Stainless Steel	IP12f
EZ2	EZ Pull/EZ Read Wire Harnesses for Power, Controls and Voice & Data	Slip Fit PVC to End Bell	IP12g
EZ3	Pre-Wired Flexible Conduit	Slip Fit PVC to Smooth Bushing]	IP12h
EZ3a	THNN Outer Diameter Chart	Slip Fit PVC to HDPE Conduit	IP12m
EZ4	Phase Wire Marker	Slip Fit PVC to Fiberglass Conduit	IP12n
Installe	ed Products	PVC Transition Couplings	IP13
IP1	QwikDuct HDPE Template	PVC to PVC	IP13a
IP2	QwikDuct HDPE Template Order Info	PVC to EMT	IP13b
IP2a	QwikDuct Template HDPE Bore Spacers	PVC to Rigid	IP13c
IP2b	PVC Driver for Joining SCH 40/80 PVC Conduit	PVC to Flexible	IP13d
IP2c-d	QwikDuct HDPE Template Applications	PVC to EMT Compression	IP13e
IP3	QwikDuct HDPE Template Custom Feet	PVC to Sealtite/Liquidtite	IP13f
IP3a	PVC End Bell Adapter	PVC to Aluminum	IP13g
IP3b	PVC Offset Couplings SCH 40 Only & Sizing Chart	PVC to Stainless Steel	IP13h
IP3c	Male Threaded PVC Offset Couplings & Sizing Chart	PVC to Galvanized Rigid	IP13i
IP3d	PVC Running Thread for PVC Conduit SCH 40/80	PVC to Smooth Bushing	IP13j
IP3e	HDPE PVC Conduit Guide	PVC to Inside PVC	IP13k
IP3f	Long Slip PVC Coupling	PVC to Female Threaded PVC	IP131
IP3g	Long Slip Bell PVC Coupling to RGD	PVC to Male Threaded PVC	IP13m
IP4	Nylon Wrap Around Conduit Clamps	PVC to Threaded PVC	IP13m-2
IP5	"The Original" 2 Way Box Support Plate	PVC Tapered to Threaded PVC	IP13n
IP5a	"The Original" 1/2 Box Support Plate	PVC to MC Cable	IP13p
IP6	4-Way Box Support Plate	PVC Reducer	IP13q
IP6a	2-Way Box Support Plate	End Bell to Galvanized Rigid	IP13r
IP6b	"Original" Round & Modified Round Box Support Plate	End Bell to EMT	IP13s
IP6c	Universal Round Box Support Plate	End Bell to Sealtite/Liquidtite	IP13t
IP6d	2-Way w/Split Fingers Box Support Plate	End Bell to Flexible	IP13u
IP7	4-Way w/Split Fingers Box Support Plate	Glavanized Rigid Coupling to PVC	IP13v
IP8	20" x 20" & 28" x 28" Junction Box Support Plate	Sealtite/Liquidtite to RGD Conduit	IP13aa
IP8a	Grid System Junction Box Support Plate	Sealtite/Liquidtite to EMT	IP13bb
IP9	Nylon Wrap-Around Conduit Straps	Sealtite/Liquidtite to EMT Compression	IP13cc
IP10	EZ Stub-Up Support Bracket	Galvanized Rigid to EMT	
IP10a	EZ Stub-Up Support Bracket	RGD TO EMT COMPRESSION	IP13ee
IP11	Trapeze Brackets 5 & 6 Holes Per Foot	Flexible Conduit to EMT	IP13ff
IP11a	Trapeze Brackets 4 & 8 Conduits	PVC End Bell Adapter	
IP11b	Trapeze Brackets "Lay In" or "Feed Thru" for Larger Conduits	PVC Threaded End Bell Adapter	IP14a
IP11c	Wide Bottom Flange & Custom Trapeze Brackets	PVC Reaming Bits	IP15
IP11d	Split Steel Nuts	PVC Chamfer Bits	IP15a
IP12	Slip Fit PVC Transition Couplings	Chuck Adapter	IP15b
IP12a	Slip Fit PVC to Galvanized Steel	Aluminum & GRC Chamfer Bits	IP16
IP12b	Slip Fit PVC to Flexible Conduit	No Center Stop Slide on Coupling	IP17
IP12c	Slip Fit PVC to Sealtite/Liquidtite	Masonry Block Box Brackets	IP18
IP12d	Slip Fit PVC to Aluminum	Adjustable Back Box Support	
IP12e	Slip Fit PVC to EMT	4 Conduit Threaded Block	IP19







PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

TABLE OF CONTENTS

Installed Products

IP20 4 Conduit Threadless Block
IP20a Box Support Rod Cubes

IP21 Support Hangers

IP21a Qwik Block Box Support

IP22 Stub Up Slip Couplings

IP23 Original Cinch Clamp

IP24 Fire Alarm Bracket

IP25 Original "Big O"

IP26 "Big O" Flat - Box Support Bracket

IP27 Dual Wall Box Support Bracket

IP27a Box Support Wall Bracket

IP27b EP-10 Box Support Bracket

IP27c Conduit Plug with ID Tag

IP28 Flat Fixed 1 Box Bracket

IP28a Flat Fixed 2 Box Bracket

IP28b Flat Fixed 3 Box Bracket

IP28c Flat Fixed 4 Box Bracket

IP29 Custom Mounting Plates

IP30 Slicknut Bushing Adapters for Pulling/Grounding Wire

IP31 Slicknut Bushing Adapters for Pulling Wire

IP32 EZ Hangers for T Bar Ceilings

IP33 T Bar Mounting Brackets

IP34 Adjustable Bar Hanger Assembly

IP35 Custom Nameplates & Labels

IP36 Roof Top Blox Conduit Support

IP37-38 Cable Ties

Prefabricated Assemblies

PVC Transition Couplings IP13

PVC to PVC IP13a

PVC to EMT IP13b

PVC to Rigid IP13c
PVC to Flexible IP13d

PVC to EMT Compression IP13e

Prefabricated Assemblies

Snap On/Off Adjustable & Reusable Protective Steel Covers

Rigid Pipe Joiner TE2

Poly Roam Box Insert TE4

Cut'N'Catch TE5

TE1

PVC Reaming Bits TE6

Live Panel Lockout Brackets TE7

Live Panel Temporary Covers TE8

Small Portable Cable Pullers TE9

Anchor Bolt Templates TE10-11

PVC Conduit Bender TE12

Dry Wall Cut Out Templates TE13

PVC Driver TE14

EMT Conduit Layout Tool TE15









PATENT PENDING PATENTED



EZ Pull – EZ Read

Home Runs, Networks Round Robins, Full Boats

SAFER - Set up only one reel. Approximately 50% of all home runs pulled on jobs throughout the year are common. Eliminates constantly handling and loading many heavy reels while installing the wire and again handling, hauling, and storing, partial reels of wire back at the shop at great expense.

Avoid expensive ringing out, tagging each conductor with costly markers that often are incorrect or fall off.

- Cross tape only with easy to remove tabs for faster easier pulling.
- Also, separate wires allow pulling individual wires in or out without removing entire harness.
- Conductors are easily added or removed later.
 Nylon lacing also available.
- Avoid expensive ringing out, tagging each conductor with costly markers that often are incorrect or fall off.
- · Every wire tested for quality.
- Extra footage to guarantee length.
- Quantity discounts and labor only orders (customer supplies all material other than SP proprietary items) available for greater savings.
- If manufacturers' brands are not specified equals will be supplied.
- Assemblies are UL Listed provided all components are UL.
- Labor only orders negotiated
- Certificates of insurance at no charge for pay outs when storing.
- Conductors carefully inspected for excellent quality plus reels properly marked & shipped flat or standing upright on skids for easier unloading & handling on job sites.
- 2500 foot reels from manufacturers often run short. Home runs will only be as long as shortest reel of the conductors involved plus some footage loss when striping or printing each conductor. Allowed for SP to order longer reels.











Catalog #	Description	Reel Size	lbs./ Reel
#12 THHN \$	Solid and Stranded		
HR 5C 12SOL 2500	5 Conductor #12 THHN Solid x 2500 foot Reel no wires printed or striped	22 w x 30 h	375
HR 5C 12STR 2500	5 Conductor #12 THHN Stranded x 2500 foot Reel and same as above -or- x 2500 foot reel no wires printed or striped	22 w x 30 h	375
HR 7C 12SOL 2500	7 Conductor #12 THHN Solid x 2500 foot Reel 3 Neutrals identified and plus 4 wires not printed or striped	22 w x 30 h	525
HR 7C 12STR 2500	7 Conductor #12 THHN Stranded and same as above -or- x 2500 foot reel - 3 Neutrals identified and plus 4 wires not printed or striped	22 w x 30 h	525
#10 THHN S	Solid and Stranded		
HR 5C 10SOL 2500	5 Conductor #10 THHN Solid x 2500 foot Reel no wires printed or striped	28 w x 36 h	600
HR 5C 10STR 2500	5 Conductor #10 THHN Stranded same as above	28 w x 36 h	600
HR 7C 10SOL 2500	7 Conductor #10 THHN Solid x 2500 foot Reel 3 Neutrals identified and plus 4 wires not printed or striped	28 w x 36 h	840
HR 7C 10STR 2500	7 Conductor #10 THHN Stranded x 2500 foot Reel 3 Neutrals identified and plus 4 wires not printed or striped	28 w x 36 h	840

Tell Us What You Need - We'll Make It!

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED





EZ Pull - EZ ReadWire Harnesses



CABLE



Striped or Numbered & Lettered Conductors



CIRCUIT SIZES

Eliminates Ringing Out & Tagging



LOW VOLTAGE

#18 thru #1/0 Gauge Wire: THHN, XHHW, XLP/USE, EPR HYPALON, etc. or equal size Cat 5 or 6, enhanced Cat 5 or 6 low voltage. Plus all other manufacturers brands and other types of wire including low voltage cables.

NOTE: We stongly recommend using water based pulling lubes when pulling silicon and other similar types of wire insulation which DO NOT allow our printing to properly adhere. In this case we can make wire markers with any nomenclature required and apply them at any location of the harnesses on the conductors per customers specification.

Set Up and Pull Off 1 Reel – Eliminates Wire Pulling Equipment

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



EZ2

EZ Pull - EZ Read



Pre-Wired Flexible Conduit Custom Assemblies



We invented and introduced these products to the electrical industry in 1981, 1991 & 1997

- Up thru 200 foot long lengths any type of wire or cable, including: fibre optic, in any type of flexible steel or aluminum, liquidtight, ENT, NMLT, etc. conduit.
 - NOTE: Low voltage and power cable should not be combined.
- Conductors printed with any combination of numbers, letters or symbols repeated every half inch along their length.
- Any color PVC jacket and thicknesses available for greater protection in wet locations, corrosive areas or embedding in concrete.
- Quantity discounts, labor only orders (customer supplies wire) and firm price blanket orders available.
- If manufacturers' brands are not specified equals will be supplied.

SAFER - BETTER - FASTER PV Cable Harnesses Also Available for Solar & Wind Farms









PATENT PENDING PATENTED



THHN Copper Harnesses Appoximate Outer Diameters

Wire	Single	NUMBER OF CONDUCTORS (Size shown in inches)						_			
Size	OD	3	4	5	6	7	19	37	61	91	127
18	0.096	0.192	0.221	0.288	0.288	0.288	0.480	0.672	0.86	1.060	1.248
16	0.106	0.212	0.244	0.318	0.318	0.318	0.530	0.742	0.954	1.166	1.378
14	0.112	0.244	0.258	0.336	0.336	0.336	0.560	0.784	1.008	1.323	1.456
12	0.131	0.262	0.302	0.393	0.393	0.393	0.655	0.917	1.179	1.441	1.703
10	0.165	.0330	0.380	0.495	0.495	0.495	0.825	1.155	1.485	1.815	2.145
8	0.218	0.436	0.502	0.654	0.654	0.654	1.090	1.526	1.962	1.962	2.834
6	0.257	0.514	0.591	0.771	0.771	0.771	1.285	1.800	2.313	2.830	3.341
4	0.328	0.656	0.755	0.984	0.984	0.984	1.640	2.300			
3	0.356	0.710	0.820	1.070	1.070	1.070	1.780	2.490			
2	0.388	0.780	0.890	1.160	1.160	1.160	1.940	2.270			
1	0.450	0.900	1.040	1.350	1.350	1.350	2.250	3.150			
1/0	0.491	0.980	1.130	1.470	1.470	1.470	2.460				
2/0	0.537	1.070	1.240	1.610	1.610	1.610	2.690				
3/0	0.588	1.180	1.350	1.760	1.760	1.760	2.940				
4/0	0.646	1.290	1.490	1.940	1.940	1.940	3.230				
Num of La		2	3	3	3	3	5	7	9	11	13

PRE-WIRED FLEXIBLE CONDUIT ASSEMBLIES DO NOT MEET MC CABLE SPECIFICATIONS PER THE NATIONAL ELECTRIC CODE AND DO NOT HAVE FILLERS OR ANY TYPE WRAPPING AROUND CONDUCTORS WITHIN THE FLEXIBLE CONDUIT.

SAFER – BETTER – FASTER

Customer is responsible to ensure Wire Harnesses meet all codes plus owners' and specifying engineers' requirements.

E: info@spproducts.com • www.spproducts.com









PATENT PENDING PATENTED




LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007 P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595

EZ3a



Phase Wire Marker

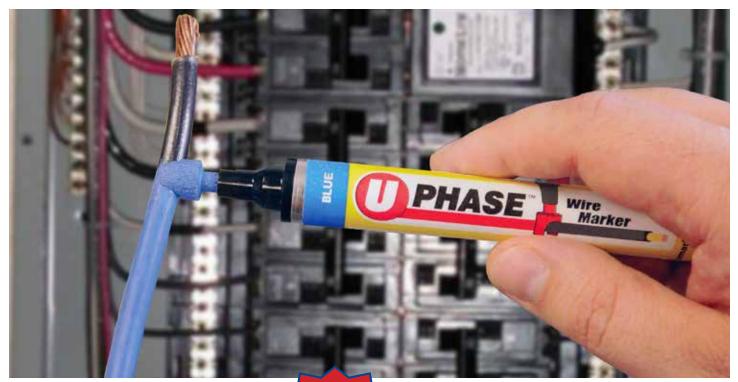

Cat# (specify color)	Desc.
PWM100	Regular Tip
PWM200	Wide Tip

clean sheath permanently

• Fast drying (in just 30 seconds) paint resists handling, heat and UV Light plus adheres to

- Lasts for 1 year fom date of purchase provided tube is immediately & properly capped after each use
- EACH TUBE CAN MARK MORE THAN 600 LINEAR FEET OF WIRE
- Ideal for Panels, Color Coding and identifying Wiring Circuits, Cat 5 Ethernet plus audio/video and HDMI Cable, Automotive Wire, etc.

Wider Tip for Larger Wires



Available in the following colors:

B = Black

BL = Blue

BRN = Brown

GRN = Green

GR = Gray

O = Orange

P = Pink

R = Red

V = Violet

W = White

Y = Yellow

Save Hundreds of dollars per tube









PATENT PENDING PATENTED



That Help Do Jobs...

SAFER

NO WORKERS BELOW PREVENTS INJURIES OR DEATHS

BETTER

RATED AT 4.000 PSI **TENSILE STRENGTH** AT BREAK


OVER 12X THAN SPACERS & CHAIRS



HDPE CUSTOM TEMPLATES

Patent Pending






Eliminates dangerous & expensive time working in trench strengthening weak spacers & chairs with tie wire or other methods.

Lowering assembled conduit from above allows other savings - Digging a narrower trench for less excavation, concrete or slurry, shoring and backfill. The savings are huge!



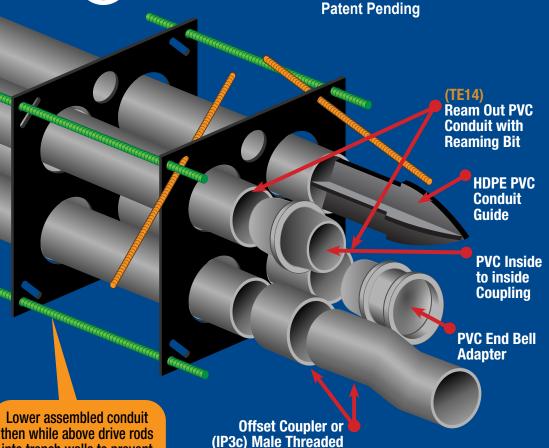

into trench walls to prevent floating during concrete or slurry pour.

Offset Coupler

ALSO SUITABLE FOR TRANSFORMER & SWITCHGEAR STUB UPS

Submittals provided with all duct bank quotes









PATENT PENDING **PATENTED**



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



QwikDuct HDPE a



CUSTOM TEMPLATES

WHEN ORDERING CUSTOMER MUST SPECIFY:


- 1. Material Thickness 3/8", 1/2", 3/4"
 - and Load Rating Required (1/2" & 3/4" are special order materials)
- 2. Size & Location of Rebar Holes
- 3. Spacing Between Conduit Openings
- 4. Rebar Stake Down Slots Required?
- 5. Diameter of Conduits
- 6. Footage Between Templates
- 7. Size & Location of Concrete Flow Holes

WHEN ASSEMBLING ABOVE THE TRENCH:

- 1. Install Conduits into Templates & Rebar if Required
- 2. Lower Assemblies into Trench
- 3. Insert Stake Down Rods into Angled Slots
- 4. Drive Stake Down Rods into Trench Walls from Above
- 5. Backfill with Concrete, Slurry, Sand or Gravel etc.



QwikDuct Templates can be used with all standardized trade size conduit specified per NFPA 70 NEC

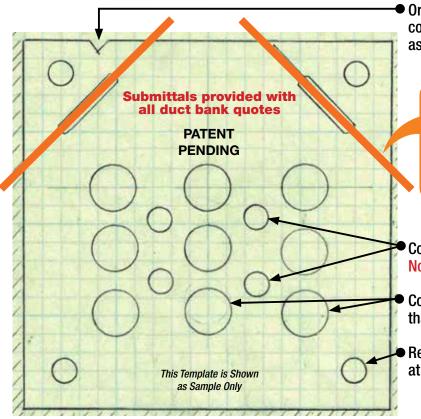

Orientation notch for fast. correct alignment during assembly above trench.

> Workers insert rods thru angled slots and drive rods into trench walls from above to prevent floating during concrete pour.

OWIKDUCT HDPE CUSTOM **TEMPLATES** meet or exceed **US Army Corps of Engineers** requirement.

Customer must specify larger diameter holes to enable feeding bell ends of conduit from either direction.

Concrete flow thru holes.

Note: specify size and location.

Conduit Holes Larger than Conduit OD (see IP3)

Rebar holes available at locations specified

PROVIDE SAFER & FASTER INSTALLATION PLUS ALLOW CLOSING TRENCH QUICKER TO **REDUCE CHANCE OF** DANGEROUS & COST **SOIL OR WATER PROBLEMS**

ALSO SUITABLE FOR TRANSFORMER & SWITCHGEAR STUB UPS









PATENT PENDING PATENTED



QwikDuct HDPE Bore Spacers





3/4" HDPE for Greater Strength to Accommodate Assemblies with Wheels.

2" Diameter Wheels are Standard, Larger Size Diameters Available Upon Request

Roll assembled conduit into caissons under obstructions.

WHEN ORDERING CUSTOMER MUST SPECIFY:

- 1. Material Thickness 3/8", 1/2", 3/4" and Load Rating Required (1/2" & 3/4" are special order materials)
- 2. Size & Location of Rebar Holes
- 3. Spacing Between Conduit Openings
- 4. Rebar Stake Down Slots Required?
- 5. Diameter of Conduits
- **6. Footage Between Templates**
- 7. Size & Location of Concrete Flow Holes
- 8. Size, Number & Location of Wheels

Customer must specify larger diameter holes to enable feeding bell ends of conduit from either direction.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

PVC Driver for Joining SCH 40/80 NEW **PVC Conduit**








Assemble PVC conduits in a Duct Bank on a job site or prefab using the PVC Driver with a Hammer Drill to join 2 pieces of PVC conduit in a matter of seconds.

Catalog #	SCH 40/80 PVC Conduit Size
PVCD-100-125-150	1", 1-1/4" & 1-1/2"
PVCD-200-250-300	2", 2-1/2" & 3"
PVCD-350-400	3-1/2″ & 4"
PVCD-500	5"
PVCD-600	6"
PVCD-800	8"

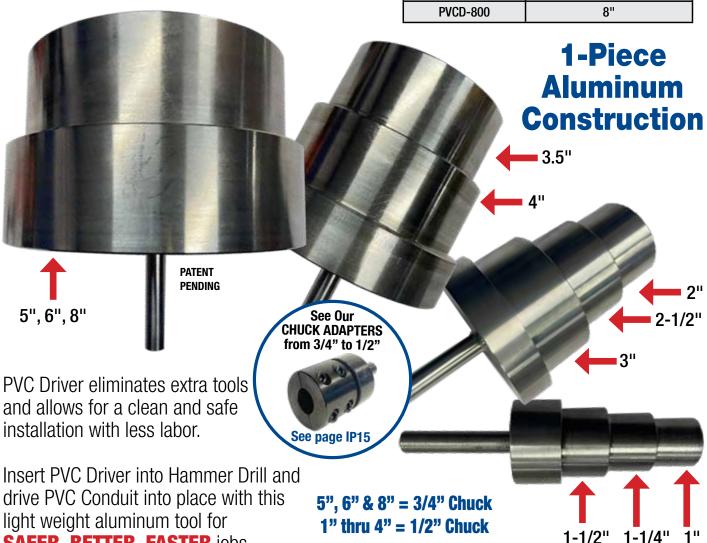

Customer must satisfy all codes and owners' specifications.



SAFER, BETTER, FASTER jobs.







PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



QwikDuct HDPECUSTOM TEMPLATES









Please visit spproducts.com to see video IP1 & IP2

Do Jobs SAFER BETTER FASTER! Earn More Profit!

It took two men a full day to assemble the first 20 feet. It required 15 3½" conduits and one 2½" conduit to turn up for a tap box, a few feet away, two of the 3½" and one of the 2½" had to turn up to go in to separate CT cabinets and then turn back down to continue the full length.

On the day of trenching we just moved this section over, and it took four men 4 hours to assemble the remainder of the run. It should take another 12 man hours to make the connection between the 16 conduits the existing stubs out of the building.

Ideal for stubbing up for Transformers & Switch Gear

QWIK DUCT Templates can be used with all standardized trade size conduit specified per NFPA 70 NEC

FREE SPECIAL OFFER!

Contractor customer earns \$1,000 worth of any size 1 Piece Reaming Bits for every \$100,000 purchases of any of SP's products based on their contractor's cost within a 12 month period starting with the date of 1st order of program.

To qualify contractor customer must accept this offer with a dated, signed agreement properly recorded and filed by SP Products and contractor must renew the agreement at the end of every year if he chooses to continue the program.

IMPORTANT!

- Customer is responsible for meeting all specifications on the job and must inform SP if heavier than schedule 80 PVC conduit is installed.
- For heavier loads (steel, rigid, EMT or other heavier conduit) we strongly suggest customer installs rebar on outside perimeter to transfer the load away from the templates.
- Customer is also responsible for calculating and meeting all load bearing specifications.
- Heavier conduit should be fed thru the lower openings in the template if otherwise SP must be informed prior to installation.











PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE


730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP2c-d

QwikDuct HDPE




CUSTOM QWIKDUCT TEMPLATE FEET

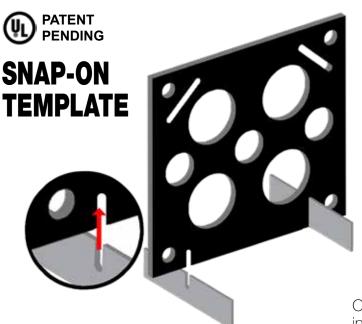

Unique interlock system serves as a base & keeps templates upright

Quickly apply glue if needed to keep feet in place when lowering

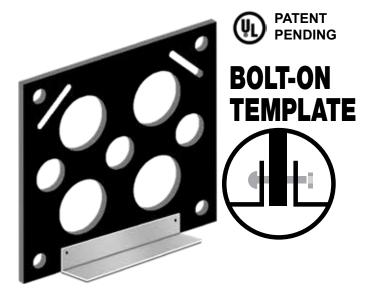

Customer must specify all details. Sold separately or installed by SP. Attach any length 2" tall x up thru 4" wide base, 16 gauge galvanized steel to bottom of templates.

Customer must allow air space to allow concrete flow under templates and feet.

Attach both angle irons with 2 bolts and nuts for each template during assembly on job site before lowering into trench

QWIKDUCT TEMPLATE HOLE SIZING GUIDE

Customer must make certain conduit openings are wide enough to allow the bell end of conduit to be fed thru from either direction if required by specs.

SCHEDULE 40 PVC CONDUIT SIZE (Inches)												
1/2	3/4	1	11/4	11/2	2	21/2	3	3½	4	5	6	8
	SUGGESTED DIAMETER OF CONDUIT HOLE (Inches) For Bell End Clearance											
11/4	11/2	2	21/4	21/2	3	31/2	41/4	5	51/4	61/4	71/2	93/4

NOTE: A MINIMUM OF $1\frac{1}{2}$ OF MATERIAL INCH MUST BE MAINTAINED BETWEEN CONDUIT AND ALL OPENINGS TO COMPLY WITH UL REQUIREMENTS.

Customer must satisfy all codes and owners' specifications.










PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

PVC End Bell Adapter

Sizes 1/2" thru 6"

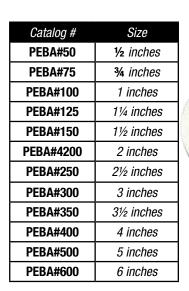


All Above Meet UL651 Plus... CSA C22.2, No. 85 and US Army Corps **Engineers Specifications**




Transitions in Less Than 5 Minutes! Save Cost on the Rigid Nipple, Tape & Labor **Use for Entire Job - Not Just for Repair**


Perfect for use with QwikDuct HDPE Templates for Railway, Highway & Tollway



1. Align QwikDuct close to manhole or vault



2. Ream out conduits and glue on end bell adapters to each conduit inside or outside manhole or vault



3. Slide conduits with bell end adapters thru manhole openings inside or outside manhole or vault





E: info@spproducts.com • www.spproducts.com



PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007 P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595

IP3a

PVC Offset Couplings










 PVC Offset used to join conduits when they shift due to stress of concrete pour

 Offset facilitates ease of installation without need to chip out concrete

> OFFSET COUPLINGS MEET MANDREL TEST REQUIREMENTS

> > PATENT PENDING

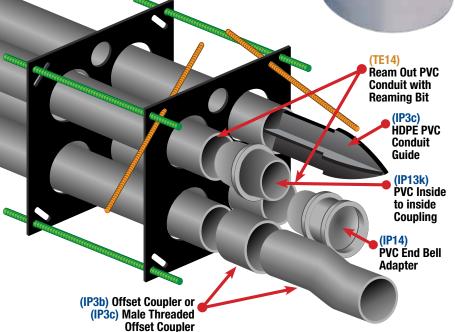

Conduit Sizes 1/2" thru 6" Offset Sizing Chart & Catalog Numbers

Size	Offset	Cat #
1/2"	1/2"	50-PVC-OFFSET 50
	3/4"	50-PVC-0FFSET 75
	1"	50-PVC-0FFSET 100
	1-1/4"	50-PVC-0FFSET 125
	1-1/2"	50-PVC-0FFSET 150
	2"	50-PVC-0FFSET 200
	3"	50-PVC-0FFSET 300
3/4"	1/2"	75-PVC-0FFSET 50
	3/4"	75-PVC-0FFSET 75
	1"	75-PVC-0FFSET 100
	1-1/4"	75-PVC-0FFSET 125
	1-1/2"	75-PVC-0FFSET 150
	2"	75-PVC-0FFSET 200
	3"	75-PVC-0FFSET 300
1"	1/2"	100-PVC-0FFSET 50
	3/4"	100-PVC-0FFSET 75
	1"	100-PVC-0FFSET 100
	1-1/4''''	100-PVC-0FFSET 125
	1-1/2"	100-PVC-0FFSET 150
	2"	100-PVC-0FFSET 200
	3"	100-PVC-0FFSET 300
1-1/4"	1/2"	125-PVC-0FFSET 50
	3/4"	125-PVC-0FFSET 75
	1"	125-PVC-0FFSET 100
	1-1/4"	125-PVC-0FFSET 125
	1-1/2"	125-PVC-0FFSET 150
	2"	125-PVC-0FFSET 200
	3"	125-PVC-0FFSET 300
1-1/2"	1/2"	150-PVC-0FFSET 50
	3/4"	150-PVC-0FFSET 75
	1"	150-PVC-0FFSET 100
	1-1/4"	150-PVC-0FFSET 125
	1-1/2"	150-PVC-0FFSET 150
	2"	150-PVC-0FFSET 200
	3"	150-PVC-0FFSET 300
2"	1/2"	200-PVC-0FFSET 50
	3/4"	200-PVC-0FFSET 75
	1"	200-PVC-0FFSET 100
	1-1/4"	200-PVC-0FFSET 125
ĺ	1-1/2"	200-PVC-0FFSET 150
	2"	200-PVC-0FFSET 200
İ	3"	200-PVC-0FFSET 300

Size	Offset	Cat #
3"	1/2"	300-PVC-0FFSET 50
	3/4"	300-PVC-0FFSET 75
	1"	300-PVC-0FFSET 100
	1-1/4''''	300-PVC-0FFSET 125
	1-1/2"	300-PVC-0FFSET 150
	2"	300-PVC-0FFSET 200
	3"	300-PVC-0FFSET 300
3-1/2"	1/2"	350-PVC-0FFSET 50
	3/4"	350-PVC-0FFSET 75
	1"	350-PVC-0FFSET 100
	1-1/4''''	350-PVC-0FFSET 125
	1-1/2"	350-PVC-0FFSET 150
	2"	350-PVC-0FFSET 200
	3"	350-PVC-0FFSET 300
4"	1/2"	400-PVC-0FFSET 50
	3/4"	400-PVC-0FFSET 75
	1"	400-PVC-0FFSET 100
	1-1/4'''	400-PVC-0FFSET 125
	1-1/2"	400-PVC-0FFSET 150
	2"	400-PVC-0FFSET 200
	3"	400-PVC-0FFSET 300
5"	1/2"	500-PVC-0FFSET 50
	3/4"	500-PVC-0FFSET 75
	1"	500-PVC-0FFSET 100
	1-1/4'''	500-PVC-0FFSET 125
	1-1/2"	500-PVC-0FFSET 150
	2"	500-PVC-0FFSET 200
	3"	500-PVC-0FFSET 300
6"	1/2"	600-PVC-0FFSET 50
	3/4"	600-PVC-0FFSET 75
	1"	600-PVC-0FFSET 100
	1-1/4'''	600-PVC-0FFSET 125
	1-1/2"	600-PVC-0FFSET 150
	2"	600-PVC-0FFSET 200
	3"	600-PVC-0FFSET 300

QwikDuct Templates can be used with all standardized trade size conduit specified per NFPA 70 NEC









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

Male Threaded PVC Offset



Schedule 40 ONLY




 PVC Offset used to join conduits when they shift due to stress of concrete pour

 Offset facilitates ease of installation without need to chip out concrete

OFFSET COUPLINGS MEET MANDREL TEST REQUIREMENTS

> PATENT PENDING

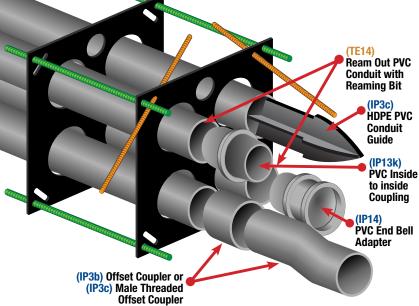

Conduit Sizes 1/2" thru 6"Offset Sizing Chart & Catalog Numbers

Size	Offset	Cat #
1/2"	1/2"	50-PVC-0FFSET-THR 50
	3/4"	50-PVC-0FFSET-THR 75
	1"	50-PVC-0FFSET-THR 100
	1-1/4"	50-PVC-0FFSET-THR 125
	1-1/2"	50-PVC-0FFSET-THR 150
	2"	50-PVC-0FFSET-THR 200
	3"	50-PVC-0FFSET-THR 300
3/4"	1/2"	75-PVC-0FFSET-THR 50
	3/4"	75-PVC-0FFSET-THR 75
	1"	75-PVC-0FFSET-THR 100
	1-1/4"	75-PVC-0FFSET-THR 125
	1-1/2"	75-PVC-0FFSET-THR 150
	2"	75-PVC-0FFSET-THR 200
	3"	75-PVC-0FFSET-THR 300
1"	1/2"	100-PVC-0FFSET-THR 50
	3/4"	100-PVC-OFFSET-THR 75
	1"	100-PVC-0FFSET-THR 100
	1-1/4''''	100-PVC-0FFSET-THR 125
	1-1/2"	100-PVC-0FFSET-THR 150
	2"	100-PVC-0FFSET-THR 200
	3"	100-PVC-0FFSET-THR 300
1-1/4"	1/2"	125-PVC-0FFSET-THR 50
	3/4"	125-PVC-0FFSET-THR 75
	1"	125-PVC-0FFSET-THR 100
	1-1/4"	125-PVC-0FFSET-THR 125
	1-1/2"	125-PVC-0FFSET -THR150
	2"	125-PVC-0FFSET-THR 200
	3"	125-PVC-0FFSET-THR 300
1-1/2"	1/2"	150-PVC-0FFSET-THR 50
	3/4"	150-PVC-0FFSET-THR 75
	1"	150-PVC-0FFSET-THR 100
	1-1/4"	150-PVC-0FFSET-THR 125
	1-1/2"	150-PVC-0FFSET-THR 150
	2"	150-PVC-0FFSET-THR 200
	3"	150-PVC-0FFSET-THR 300
2"	1/2"	200-PVC-0FFSET-THR 50
	3/4"	200-PVC-0FFSET-THR 75
	1"	200-PVC-0FFSET -THR100
	1-1/4"	200-PVC-0FFSET-THR 125
	1-1/2"	200-PVC-0FFSET-THR 150
	2"	200-PVC-0FFSET-THR 200
	3"	200-PVC-0FFSET-THR 300

Size	Offset	Cat #
3"	1/2"	300-PVC-0FFSET-THR 50
	3/4"	300-PVC-OFFSET-THR 75
	1"	300-PVC-0FFSET-THR 100
	1-1/4''''	300-PVC-OFFSET-THR 125
	1-1/2"	300-PVC-OFFSET-THR 150
	2"	300-PVC-OFFSET-THR 200
	3"	300-PVC-OFFSET-THR 300
3-1/2"	1/2"	350-PVC-OFFSET-THR 50
	3/4"	350-PVC-OFFSET-THR 75
	1"	350-PVC-OFFSET-THR 100
	1-1/4''''	350-PVC-0FFSET-THR 125
	1-1/2"	350-PVC-0FFSET-THR 150
	2"	350-PVC-0FFSET-THR 200
	3"	350-PVC-0FFSET-THR 300
4"	1/2"	400-PVC-OFFSET-THR 50
İ	3/4"	400-PVC-OFFSET-THR 75
	1"	400-PVC-OFFSET-THR 100
	1-1/4"	400-PVC-OFFSET-THR 125
	1-1/2"	400-PVC-OFFSET-THR 150
	2"	400-PVC-0FFSET-THR 200
	3"	400-PVC-OFFSET-THR 300
5"	1/2"	500-PVC-0FFSET-THR 50
	3/4"	500-PVC-0FFSET-THR 75
	1"	500-PVC-OFFSET-THR 100
	1-1/4''''	500-PVC-0FFSET-THR 125
	1-1/2"	500-PVC-0FFSET-THR 150
	2"	500-PVC-0FFSET-THR 200
	3"	500-PVC-0FFSET-THR 300
6"	1/2"	600-PVC-0FFSET-THR 50
	3/4"	600-PVC-0FFSET-THR 75
	1"	600-PVC-0FFSET-THR 100
	1-1/4"	600-PVC-0FFSET-THR 125
	1-1/2"	600-PVC-0FFSET-THR 150
	2"	600-PVC-0FFSET-THR 200
	3"	600-PVC-0FFSET-THR 300

QwikDuct Templates can be used with all standardized trade size conduit specified per NFPA 70 NEC









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

PVC



Running Thread for PVC Conduit SCH 40/80



Patent Pending

- Any size Running Thread PVC Conduit SCH 40/80 up to 30 inches in length for 1/2" thru 6" conduit
- Use with PVC Female adapter or locknut for any type of conduit application
- Or order several 30" PVC Running Thread Conduits and cut to desired length on the jobsite

SIZE	LENGTH	CATALOG #
1/2"	Specify	PVN-50-40
3/4"	Specify	PVN-75-40
1"	Specify	PVN-100-40
1-1/4"	Specify	PVN-125-40
1-1/2"	Specify	PVN-150-40
2"	Specify	PVN-200-40
3"	Specify	PVN-300-40
3-1/2"	Specify	PVN-350-40
4"	Specify	PVN-400-40
5"	Specify	PVN-500-40
6"	Specify	PVN-600-40



SIZE	LENGTH	CATALOG #
1/2"	Specify	PVN-50-80
3/4"	Specify	PVN-75-80
1"	Specify	PVN-100-80
1-1/4"	Specify	PVN-125-80
1-1/2"	Specify	PVN-150-80
2"	Specify	PVN-200-80
3"	Specify	PVN-300-80
3-1/2"	Specify	PVN-350-80
4"	Specify	PVN-400-80
5"	Specify	PVN-500-80
6"	Specify	PVN-600-80







PATENT PENDING PATENTED






HDPE PVC Conduit Guide



Schedule 40 & 80

- For 1-1/2" thru 8" PVC Conduit
- Makes for faster installation with less labor
- Reusable HDPE for standard cards and Bell End clearance holes in Duct Bank applications

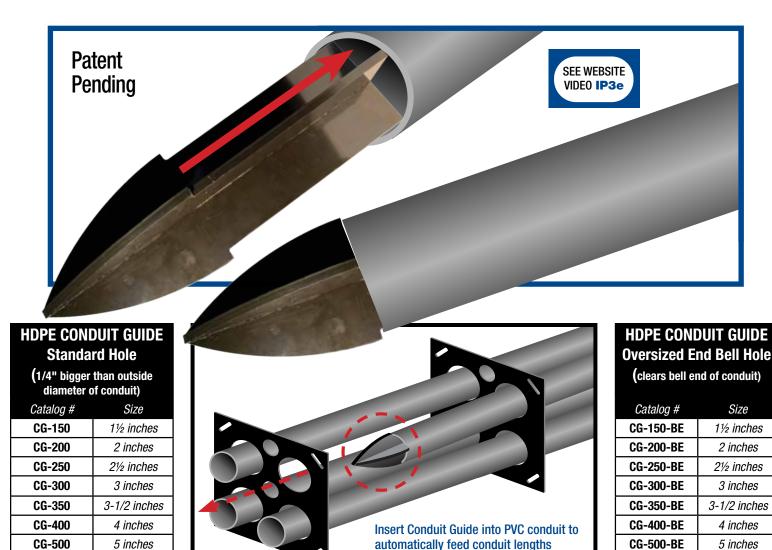

	PRODUCTS,	INC
	Productivity and value thru	ideas

6 inches

8 inches



E: info@spproducts.com • www.spproducts.com





PATENT PENDING PATENTED

CG-600-BE

CG-800-BE



6 inches

8 inches

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



through continuous duct bank holes

without assistance.

IP3e

CG-600

CG-800

MADE IN USA

Long Slip PVC Coupling

Schedule 40 & 80

- For 1/2" thru 6" PVC Conduit
- Maintains same inside diameter
- Faster installation with less labor
- Allows longer and more stable support than tradtional PVC coupling
- Slip in PVC and glue into one end and slip in and glue into the remaining end to continue conduit run -PVC
- Slip PVC conduits into the Long Slip PVC coupling and glue



Patent

Pendina

NEW





LONG SLIP COUPLING			
Catalog #	Size		
LS-PVC-75	¾ inches		
LS-PVC-100	1 inches		
LS-PVC-125	1¼ inches		
LS-PVC-150	1½ inches		
LS-PVC-200	2 inches		
LS-PVC-250	2½ inches		
LS-PVC-300	3 inches		
LS-PVC-350	3½ inches		
LS-PVC-400	4 inches		
LS-PVC-500	5 inches		
LS-PVC-600	6 inches		

Perfect and more stable for duct bank applications.









PATENT PENDING PATENTED




LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

Long Slip Bell NEW PVC Coupling

to RGD Schedule 40 & 80

- For 1/2" thru 6" PVC Conduit
- Maintains same inside diameter for both PVC and RGD
- Faster installation with less labor
- More stability than standard coupling
- Slip into and glue PVC into bell end and screw RGD into threaded end
- Eliminates the need for a PVC coupling
- Slip the Long Slip Bell PVC end of coupling onto stubup and transition to RGD

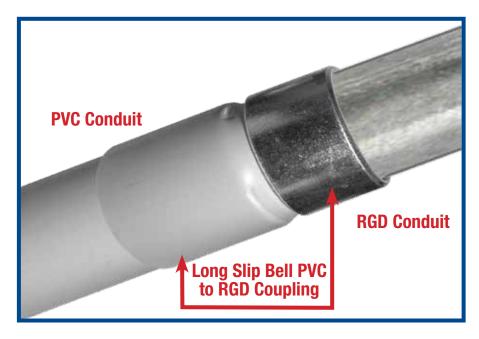







LONG SLIP to RGD			
Catalog #	Size		
LSB-RGD-75	¾ inches		
LSB-RGD-100	1 inches		
LSB-RGD-125	1¼ inches		
LSB-RGD-150	1½ inches		
LSB-RGD-200	2 inches		
LSB-RGD-250	2½ inches		
LSB-RGD-300	3 inches		
LSB-RGD-350	3½ inches		
LSB-RGD-400	4 inches		
LSB-RGD-500	5 inches		
LSB-RGD-600	6 inches		









PATENT PENDING PATENTED





EZ Raised Bracket NUSA for Box Support


Secure bracket

to box with

2 - 1/4" bolts.

- Elevates box 2", 1-5/8" or 7/8" above surface mount
- Provides box support independent of conduit
- Provides support for 4", 4-11/16", 5" and **6" square NEMA boxes**
- 4 anchor holes for stable install
- Perfect for mounting on decks, floors and walls
- Works with metal & wooden studs
- Can be used for wall packs on block or brick
- 20 Gauge Galvanized Steel
- Meets buy American Regulations

Place box on top of bracket aligning with 2 - 1/4" holes on center matching 2 - 1/4" holes of box.




SEE WEBSITE VIDEO IP4

> Meets NEC 300.11 (A) and 323.14 (A & B) Codes


Utilize additional holes on bracket leas if used on floor.

Fasten bracket and box assembly to stud with 1/4" bolt holes provided on outer perimeter of bracket.

CAT#	Height
EZRB-200	2"
EZRB-158	1-5/8"
EZRB-78	7/8"

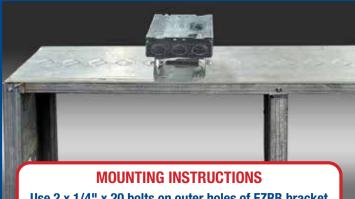

Use 2 x 1/4" x 20 bolts on outer holes of EZRB bracket to fasten to stud or secure with nuts and washers or install on floor and secure with screws. Place box on top of bracket and secure with nuts, bolts & washers.

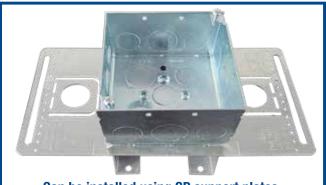

Can be installed using SP support plates as first means of support for conduit and raceways









PATENT PENDING PATENTED






"THE ORIGINAL" Box Support Plate

SAVE MORE THAN 30 MINUTES PER INSTALL WITH LESS MATERIAL

Meets NEC 3 Foot Rule From Only One Support

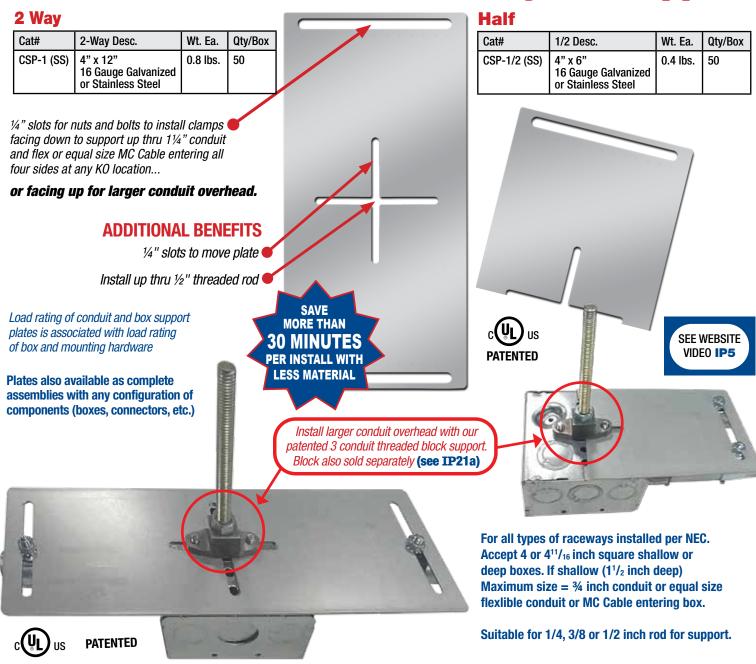

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



4-WAY BOX SUPPORT SAVE UP TO 1 HOUR PER INSTALLATION WITH LESS MATERIAL



1/4" slots to move plate

Markings to quickly center & attach box



Cat#	4-Way Desc.	Wt. Ea.	Qty/Box
CSP-4W-WC (SS)	9-5/8" x 9-5/8" 18 Gauge Galvanized or Stainless Steel (SS)	0.7 lbs.	25

SEE WEBSITE VIDEO IP6

Install up thru1/2"

threaded rod

Eliminate center KO clamps for up thru ¾" Conduit, Flex or equal size MC Cable entering all 4 sides of box at center KO location only. Bend tabs down, feed raceways thru openings to connectors on box. Holes for tek screws are also provided to attach conduit clamps when entering all other KO locations.

2

4 large open KOs in center allow entering back of box with up thru ¾" raceways to save even more time.



Tek screw holes and ¼" slots for nuts and bolts to install clamps facing down to support up thru 1¼" conduit and flex or equal size MC Cable entering all four sides at any KO location... or facing up for larger conduit overhead. Use 4-Conduit Block (IP19 or IP20) with QwikBlock (IP21A)

Load rating of conduit and box support plates is associated with load rating of box and mounting hardware










PATENT PENDING PATENTED



2-WAY BOX SUPPORT



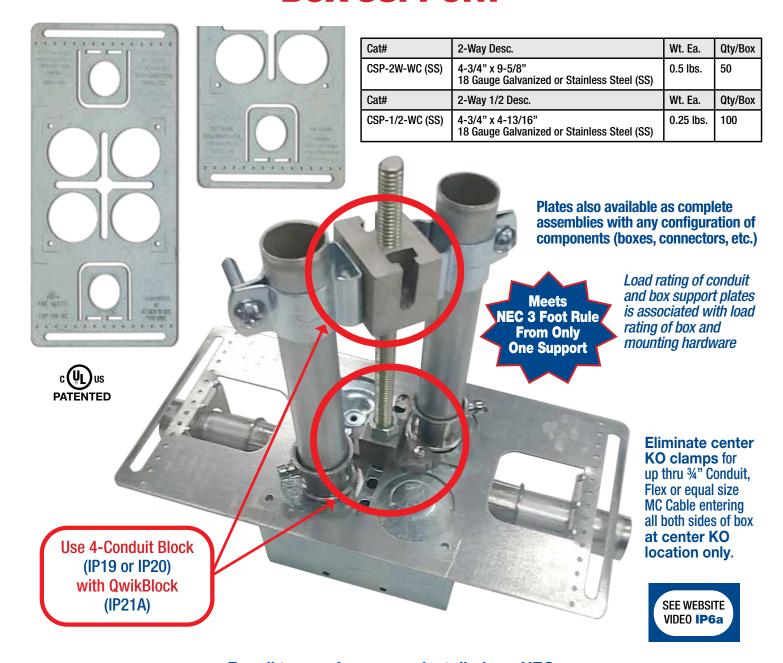

For all types of raceways installed per NEC.

Accepts 4 or 4¹¹/₁₆ & 5" inch square shallow or deep boxes.

If shallow (1¹/₂ inch deep) Maximum size = ³/₄ inch conduit or equal size flexible conduit or MC Cable entering box.

Suitable for 1/4, 3/8 or 1/2 inch rod for support.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE


"ORIGINAL ROUND" Box Support Plate





Cat#	4-Way Desc.	Wt. Ea.	Qty/Box
CSPR (SS)	11-3/4" Diameter 20 Gauge Galvanized or Stainless Steel (SS)	1 lb.	25



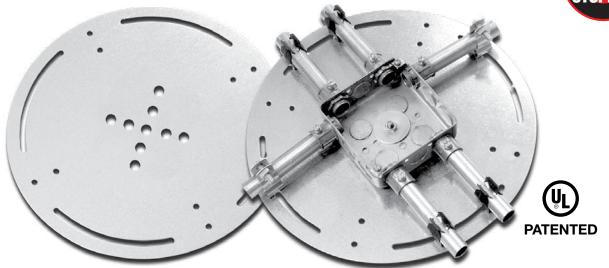


MODIFIED ROUND
Box Support Plate

Cat#	4-Way Desc.	Wt. Ea.	Qty/Box
CSPR-4K0 (SS)	11-3/4" Diameter 20 Gauge Galvanized or Stainless Steel (SS)	1 lb.	25

4 large open KOs in center allow entering back of box with up thru ¾" raceways to save even more time.

Plates Suitable for 4, 4-11/16, 5 inch Square Plus up thru 8 x 8 inch Junction Boxes Mounted Either Horizontally or Vertically. 3/32" Holes for Self Tappers and 1/4" Wide Open Slot at Each End Allow Fastening Clamps for Conduit Supports at any KO center.

Assemblies Complete with Box, Connectors, Rod, "Econo-Whips" etc. Attached Available.

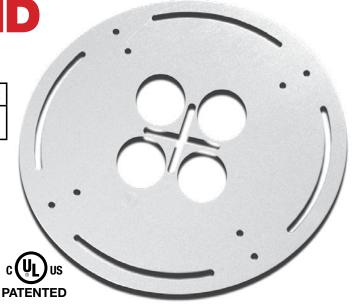

Load rating of conduit and box support plates is associated with load rating of box and mounting hardware









PATENT PENDING PATENTED




LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP6b

UNIVERSAL ROUND MADE IN USA Box Support Plate

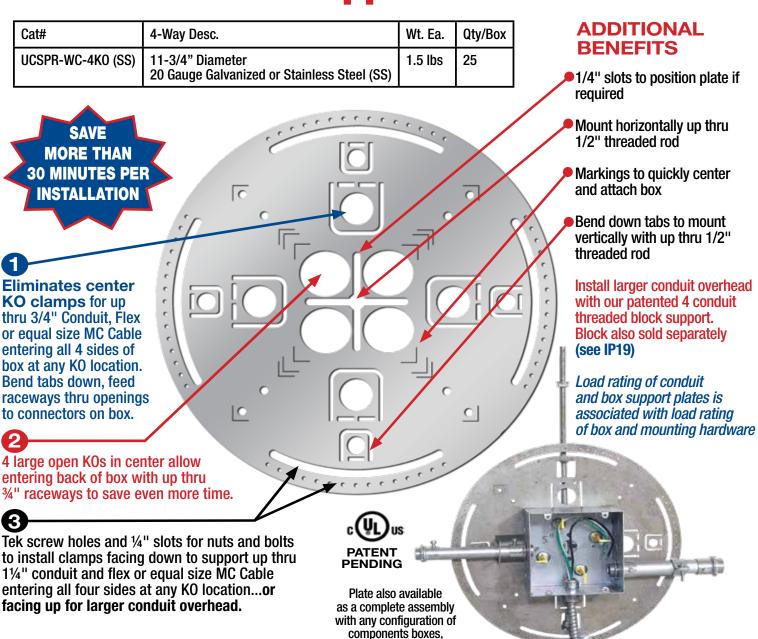

ALL FROM ONLY ONE SUPPORT HORIZONTALLY OR VERTICALLY

connectors, etc.

For all types of raceways installed per NEC.

Accepts 4, $4^{11}/_{16}$, 5 inch square shallow or deep boxes and 6 x 6 & 8 x 8 inch junction boxes. If shallow ($1^{1}/_{2}$ inch deep) Maximum size = $\frac{3}{4}$ inch conduit or equal size flexlible conduit or

MC Cable entering box. Suitable for 1/4, 3/8 or 1/2 inch rod for support.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE


2-WAY BOX SUPPORT PLATES with **FINGERS**





SAVE OVER HALF HOUR PER INSTALL WITH **LESS MATERIAL**

Cat#	2-Way Desc.	Wt. Ea.	Qty/Box
CSPV-2W-FC (SS)	5" x 11-1/2" 18 Gauge Galvanized or Stainless Steel (SS)	0.5 lbs.	50
Cat#	2-Way ¹ /2 Desc.	Wt. Ea.	Qty/Box
CSPV-1W-FC (SS)	5" x 5-3/4" 18 Gauge Galvanized or Stainless Steel (SS)	0.25 lbs.	100

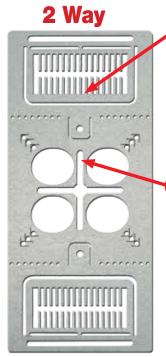

18 Gauge Galvanized or Stainless Steel


For vertical application bend 2 smaller tabs out and insert 1/4", 3/8" or 1/2" rod secured with nuts for vertical support.

PATENTED

OR insert rod in fixed hole of plate and aecure with Qwik Block (IP21a) to automaticlly center with either a 1/4" or 3/8" threaded rod with punching a center KO on top of box.

Use 4-Conduit Block (IP19 or IP20) with QwikBlock (IP21A)

2 Way-Half



or Stainless Steel



Load rating of conduit and box support plates is associated with load rating of box and mounting hardware.

Fingers eliminate all clamps for up thru 11/4" conduit, flex or equal size MC Cable entering any KO location 1 or 2 sides of box.

Plates also available as a complete assembly with any configuration of components boxes, connectors, etc.

For all types of raceways installed per NEC.

Accept 4, 411/16, 5 inch square shallow or deep boxes. If shallow (11/2 inch deep) Maximum size = ¾ inch conduit or equal size flexible conduit or MC Cable entering box. Suitable for 1/4, 3/8 or 1/2 inch rod for application.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

4-WAY

BOX SUPPORT PLATE








1 HOUR Used with 4", 4 1/2" **PER INSTALL** or 5" square outlet plus 6 x 6 and 8 x 8 junction **WITH LESS** boxes. **MATERIAL**

> Eliminates ALL conduit clamps. Bend large tabs with split fingers out and feed up thru 11/4" conduit or equal O.D. McCable into box at any KO location on all 4 sides of box.

Bend 4 smaller tabs out and insert 1/4", 3/8", or 1/2" rod secured with nuts for vertical support.

OR insert rod in fixed center hole of plate and alsosecure with our QWIK BLOCK (IP21a) for horizontal support.

1/4" slots for fastening conduit clamps to plate with nuts and bolts plus holes for TEK screws if required. 1/4" slots and **TEK** screw holes allow conduit for other systems to be supported above the plate for even geater savings!

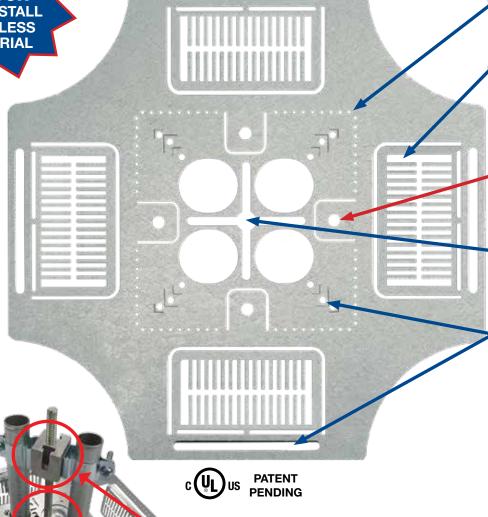

Cat# 2-Way Desc. Wt. Ea. 11-1/2" x 11-1/2" CSPV-4W-FC (SS) 0.75 lbs. 18 Gauge Galvanized or Stainless Steel (SS)



SAVE OVER



Use 4-Conduit Block (IP19 or IP20)

with QwikBlock

(IP21A)





PATENT PENDING PATENTED



Qty/Box

25



Junction Box Support Plates



20" x 20" Supports Up Thru 12" x 12" J Box 28" x 28" Supports Up Thru 20" x 20" J Box

Mount Horizontally or Vertically from 1 single support

Bend down four tabs at centers of outer edges to accept up thru 1/2" rod for vertical installation.


Drill hole in center of back of box to allow attaching single support through open cross on 20 x 20 plate to mount horizontally.

4 open KO's in center of plate allow conduit or MC Cable to enter and leave back of box.

Load rating of conduit and box support plates is associated with load rating of box and mounting hardware

20 x 20 Plate installed horizontally by one single support from ceiling eliminating additional supports for box and conduits entering box.



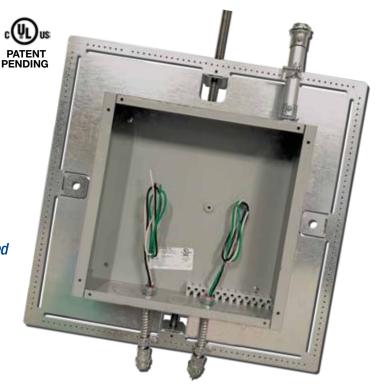

Cat#	Desc.	Wt. Ea.	Qty/Box
CSP20x20	20" x 20" 16 Gauge Galvanized or Stainless Steel (SS)	7.3 lbs	8
CSP28x28	28" x 28" 16 Gauge Galvanized or Stainless Steel (SS)	14 lbs	Any Qty.

- 1/4" Slots & Tek screw holes provided to install clamps at any location
- Other Dimensions for Smaller/Larger Boxes available, Consult Factory










PATENT PENDING PATENTED



Grid-System Box Support Plate



For Medical Centers, Hospital Rooms Requiring Power & Lighting, Emergency Power, & Alarms

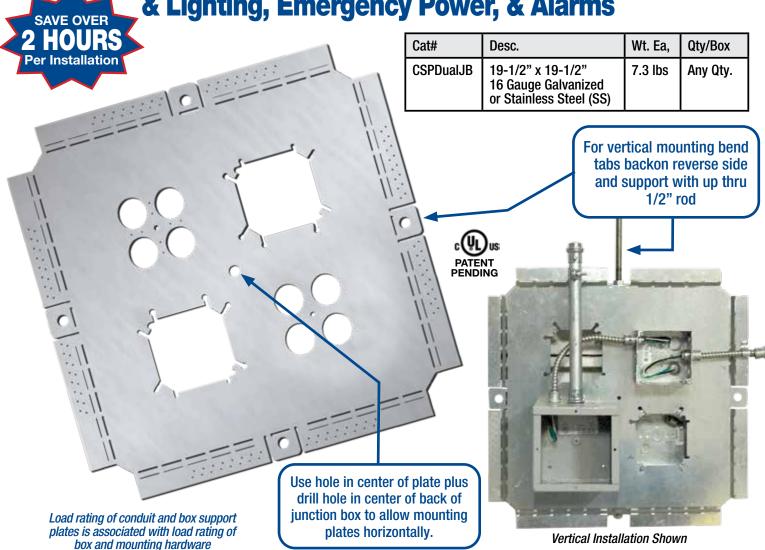

Mount Horizontally or Vertically from 1 single support

- Accepts 4", 4¹¹/₁₆, & 5" square boxes up thru 12" x 12" junction boxes.
- Mount two or more systems on same plate without cable and boxes interfering with each other.
- Allows faster, easier trouble shooting and organizing systems on jobs.
- 4 Large elliptical holes allow lining up box & plate for fast easy access in/out back of the box.
- Mount boxes above & below the plate when is installed horizontally.









PATENT PENDING PATENTED



Nylon Wrap-Around Conduit Straps











- No Tools Required
- Flame Retardant
- Up Thru 950 lb Load Ratings
- Plenum Rated Up Thru 1½" Size

	EL	ECTRIC	AL	Max
CAT#	EMT	Heavy Wall	IMC	Load lbs.
SPP-12-16P	N/A	N/A	N/A	170
SPP-17-20P	1/2" (.706)	N/A	N/A	195
SPP-21-24P	3/4" (.922)	1/2" (.840)	1/2" (.815)	215
SPP-25-29P	N/A	3/4" (1.050)	3/4" (1.029)	315
SPP-30-34P	1" (1.163)	1" (1.315)	1" (1.290)	320
SPP-35-38P	1-1/4" (1.510)	N/A	N/A	342

	EL	ECTRIC	4L	Max
CAT#	EMT	Heavy Wall	IMC	Load lbs.
SPP-40-44P	1-1/2" (1.740)	1-1/4" (1.660)	1-1/4" (1.638)	365
SPP-48-54P	N/A	1-1/2" (1.900)	1-1/2" (1.883)	380
SPP-56-63P	2" (2.197)	2" (2.375)	2" (2.360)	410
SPP-66-76P	2-1/2" (2.875)	2-1/2" (2.875)	2-1/2" (2.857)	500
SPP-79-93P	3" (3.500)	3" (3.500)	3" (3.476)	600
SPP-101-115P	3½ & 4" (4.500)	4" (4.500)	4" (4.466)	950

NOTE: Fractional numbers reflect nominal pipe diameter, decimal numbers actual O.D. in inches.

Also Ideal for HVAC, Plumbing & Mechanical Installations









PATENT PENDING PATENTED




IP9

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

EZ Stub-Up SUPPORT BRACKET



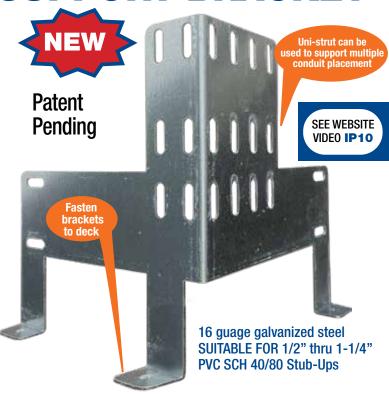





Multiple Conduit Sleeves on Strut with Strut Straps



Ty Wrap Multiple Application




HDPE Application




Single Conduit Sleeves

Cat#	Desc.
EZ-STUB-50-125	Supports 1/2" thru 1-1/4" PVC Conduit

Use nylon wrap around conduit straps, minerllacs, one-hole straps or Ty wraps to secure conduit to bracket or uni-strut

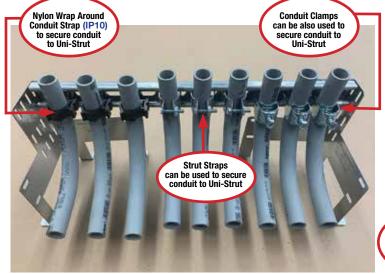

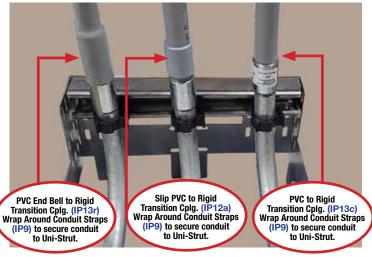

Perfect for Poured Precast Decks!









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007 P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595

E: info@spproducts.com • www.spproducts.com

IP10

Trapeze Brackets







- For 1/4" or 3/8" Threaded Rod.
- Meets UL 2239 & CSA C22.2 No.18.4
- Galvanized or Stainless Steel (plus other gauges available)

Original Feed Thru 5 Conduits per foot

Plastic Bushings for pulling LV, MC Cable, etc. must be UL Listed to maintain UL Listing when installed in the field or SP factory.



- 1 foot thru 6 foot pieces
- Order in 1 ft. increments
- 5 openings per foot spaced 21/4" on center

Original EZUTB - Size ½" thru 1¼" Conduit or equal size MC Cable

Trapeze Brackets Wt. 0.56 lbs per foot 1/2" thru 1-1/4"		
Size	5 Conduits Catalog #	
12"	EZUTB12-16GS (SS)	
24"	EZUTB24-16GS (SS)	
36"	EZUTB36-16GS (SS)	
48"	EZUTB48-16GS (SS)	
60"	EZUTB60-16GS (SS)	
72″	EZUTB72-16GS (SS)	
16GS = 16 Gauge Galvanized Steel		

(SS) = 302 Stainless Steel

Feed Thru 6 Conduits per foot



- Accomodates maximum number of 1/2" or 1" Conduit or equal size MC Cable to fit the width of the panel can.
- Maximizes straight runs and minimizes the 90°installations

Trapeze Brackets Wt. 0.56 lbs per foot 1/2" thru 1"		
Size	6 Conduits Catalog #	
12"	EZUTB75/100-12-16GS (SS)	
24"	EZUTB75/100-24-16GS (SS)	
36"	EZUTB75/100-36-16GS (SS)	
48"	EZUTB75/100-48-16GS (SS)	
60"	EZUTB75/100-60-16GS (SS)	
72′	EZUTB75/100-72-16GS (SS)	
16GS = 16 Gauge Galvanized Steel (SS) = 302 Stainless Steel		

Feed Thru 8 or 4 Conduits per foot



Trapeze Brackets 1/2" thru 2"		
Size	4 Conduits Catalog #	
12"	EZUTB200-12-14GS	
Size	8 Conduits Catalog #	
24"	EZUTB200-24-14GS	
14GS = 14 Gauge Galvanized Steel		

 Accomodates maximum number of 1/2" or 2" Conduit or equal size MC Cable.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE


730 Pratt Boulevard • Elk Grove Village, IL 60007 P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595


E: info@spproducts.com • www.spproducts.com



Trapeze Brackets












Stack Overhead in Tight Areas

Vertical on Walls

on Decks

Attach Conduit/Box Support Plates Above & Below Conduit

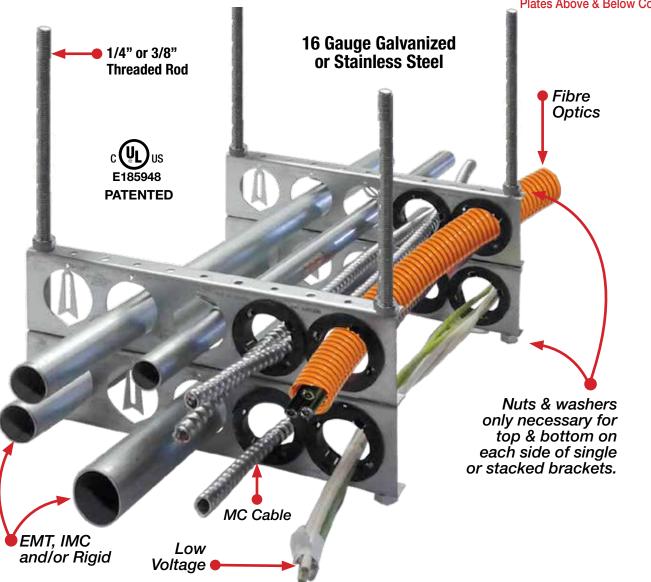

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

Custom Trapeze Brackets

MADE IN USA

Centered captive capped bolts hold conduit in place

Lay-In...

Example: for 4" EMT Li EZUTB 4-4, and EMT Li

PATENTED



Example: 4 – Four Inch Conduits EZUTB 4-4 EMT

PATENT PENDING



Available in Any Gauge Galvanized or Stainless Steel and Any Size Conduit or Configuration. Consult Factory.

or Customized!



Tell Us What You Need... We'll Make It!

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED




LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

Wide Bottom Flange



Allows Drill Chuck Clearance When Installing Vertically on Walls or Horizontally on Decks.

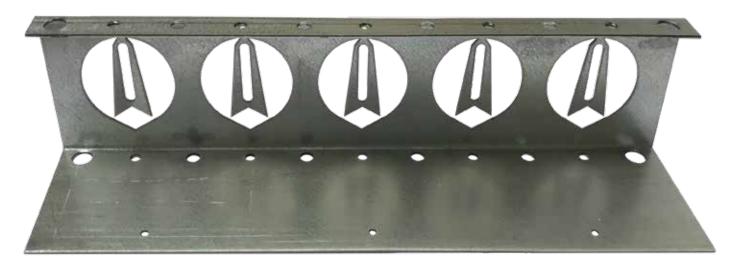

1-3/4" taller version for conduit clearance from deck.

Consult factory for price and avilability.

Cat#	4-Way Desc.	Wt. Ea.	Qty/Box
EZUTB(Length)-WF	16 Gauge Galvanized or Stainless Steel (SS)	0.7 lbs.	25

Customer must satisfy all codes and owners' specifications.










PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

Split Steel Nuts

Save valuable time placing the nut at desired position instead of spinning the nut up long lengths of threaded rod to final location.

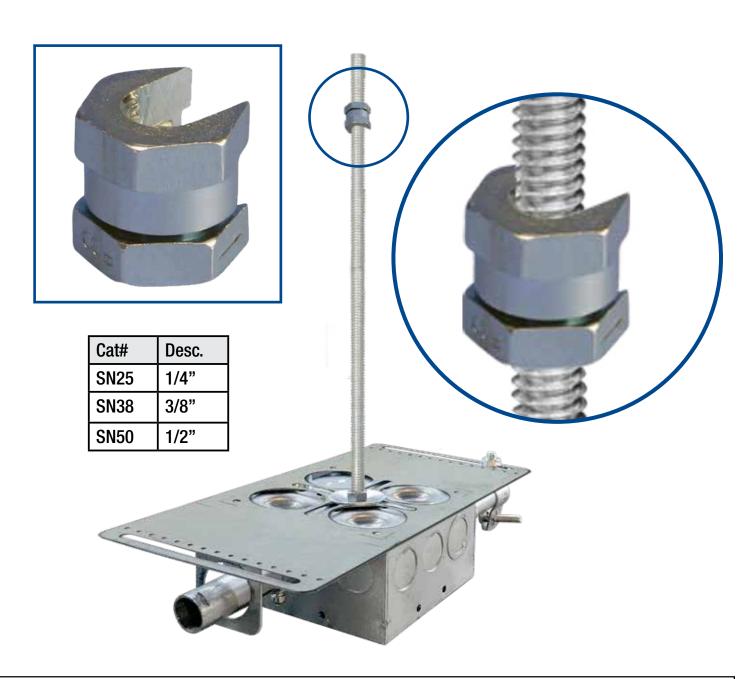







PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



Transition Slip Couplings



PVC CONDUIT SCH 40 & 80 NO REAMING BITS NEEDED!



PATENTED







PVC to Flexible



PVC to Liquidtite



PVC to



IP12e
PVC to
EMT



PVC to Stainless Steel



PVC to End Bell



PVC to Smooth Bushing



EXAMPLE: PVC TO GALVANIZED RIGID APPLICATION

Transition Slip Couplings are ideal for all types of projects plus save a great deal of money:

- Waste Water
 Treatment Plants
- Food Processing Plants
- Data Centers
- Hospitals
- Stadiums
- Expo Centers
- Light Rail
- Military Facilities
- Airports
- Museums

Use On Entire Job Not Just For Repair!

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED





PVC Schedule 40 & 80 Slip to Galvanized Rigid



Save at Least Installation.





Save Cost on the Rigid Nipple, Tape & Labor

Use for Entire Job -Not Just for Repair

Reamer NOT Required to Transition from PVC to Rigid

Apply PVC Cement to Secure & **Complete**


Step 2



Step 1

Install PVC Coupling on Conduit Flush or Just Below Grade and Cap with (Conduit Plug IP27c) or Tape Prior to Pour



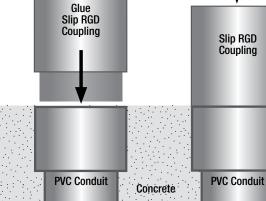

1/2" thru 6"

See Our

Conduit Plug See page IP27c

Transition Couplings		
Size	Catalog #	
1/2"	50 SLIP/RGD	
3/4"	75 SLIP/RGD	
1"	100 SLIP/RGD	
1-1/4"	125 SLIP/RGD	
1-1/2"	150 SLIP/RGD	
2"	200 SLIP/RGD	
2-1/2"	250 SLIP/RGD	
3"	300 SLIP/RGD	
3-1/2"	350 SLIP/RGD	
4"	400 SLIP/RGD	
5"	500 SLIP/RGD	
6"	600 SLIP/RGD	

All SP Products Inc. Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



PVC Conduit



PVC Schedule 40 & 80 Slip to Flexible

c Uus PATENTED

Transitions in One Minute

Save Cost on the Rigid Nipple, Tape & Labor

Use for Entire Job - Not Just for Repair

Reamer NOT Required to Transition from PVC to Flexible Conduit

Apply PVC Cement to Secure & Complete









Step 1

Install PVC Coupling on Conduit Flush or Just Below Grade and Cap wih (Conduit Plut IP27c) or Tape Prior to Pour



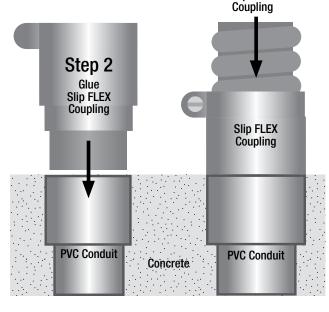

1/2" thru 1-1/2"

Transition Couplings	
Size	Catalog #
1/2"	50 SLIP/FLEX
3/4"	75 SLIP/FLEX
1"	100 SLIP/FLEX
1-1/4"	125 SLIP/FLEX
1-1/2"	150 SLIP/FLEX

All SP Products Inc. Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

Step 3

Attach FLEX Conduit to

Slip FLEX



PVC Conduit



PVC Schedule 40 & 80 Slip to Liquidtite



MADE



Transitions in One Minute

Save Cost on the Rigid Nipple, Tape & Labor

Use for Entire Job - Not Just for Repair

Reamer NOT Required to Transition

from PVC to Liquidtite

Apply PVC Cement to Secure & **Complete**

SEE WEBSITE

VIDEO IP12c

Step 2



Step 3

Attach Liquidtite Conduit to Slip Liquidtite



1/2" thru 4"

Transition Couplings	
Size	Catalog #
1/2"	50 SLIP/LIQ
3/4"	75 SLIP/LIQ
1"	100 SLIP/LIQ
1-1/4"	125 SLIP/LIQ
1-1/2"	150 SLIP/LIQ
2"	200 SLIP/LIQ
2-1/2"	250 SLIP/LIQ
3"	300 SLIP/LIQ
3-1/2"	350 SLIP/LIQ
4"	400 SLIP/LIQ

Transition Couplings	
Size	Catalog #
1/2"	50 SLIP/LIQ
3/4"	75 SLIP/LIQ
1"	100 SLIP/LIQ
1-1/4"	125 SLIP/LIQ
1-1/2"	150 SLIP/LIQ
2"	200 SLIP/LIQ
2-1/2"	250 SLIP/LIQ
3"	300 SLIP/LIQ
3-1/2"	350 SLIP/LIQ
4"	400 SLIP/LIQ
-	


All SP Products Inc. Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications




Install PVC Coupling on Conduit Flush or Just Below Grade and Cap wih (Conduit Plut IP27c) or **Tape Prior to Pour**







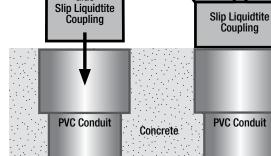

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007 P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595 E: info@spproducts.com • www.spproducts.com

PVC Conduit

Slip to Aluminum







Transitions in One Minute

Save Cost on the Rigid Nipple, Tape & Labor

Use for Entire Job - Not Just for Repair

Reamer NOT Required to Transition from PVC to Aluminum Conduit

Apply PVC Cement to Secure & Complete





All SP Products Inc. Transition Fittings a re manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications

Step 3 Attach **Aluminum Conduit** to Slip Aluminum Coupling


1/2" thru 6"

Transition Couplings	
Size	Catalog #
1/2"	50 SLIP/ALUM
3/4"	75 SLIP/ALUM
1"	100 SLIP/ALUM
1-1/4"	125 SLIP/ALUM
1-1/2"	150 SLIP/ALUM
2"	200 SLIP/ALUM
2-1/2"	250 SLIP/ALUM
3"	300 SLIP/ALUM
3-1/2"	350 SLIP/ALUM
4"	400 SLIP/ALUM
5"	500 SLIP/ALUM
6"	600 SLIP/ALUM

Step 1

Install PVC Coupling on Conduit Flush or Just Below Grade and Cap wih (Conduit Plut IP27c) or **Tape Prior to Pour**



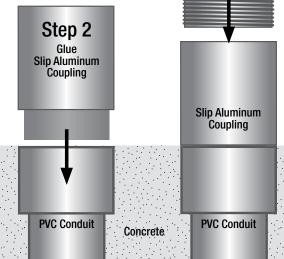

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007 P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595 E: info@spproducts.com • www.spproducts.com

PVC Conduit

PVC Schedule 40 & 80 Slip to EMT



Save at Least 1 HOUI per Installation.



Transitions in One Minute

Save Cost on the Rigid Nipple, Tape & Labor


Use for Entire Job - Not Just for Repair

Reamer NOT Required to Transition from PVC to EMT Conduit

Apply PVC Cement to Secure & Complete



1/2" thru 4"

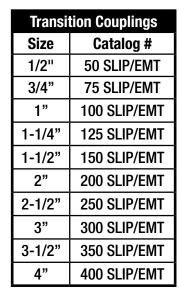

All SP Products Inc. Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications

SEE WEBSITE VIDEO IP12e Step 3 Attach **EMT Conduit** to Slip EMT Coupling Step 1 Install PVC Coupling on Conduit Flush or Just Below Grade Step 2 and Cap wih Glue (Conduit Plut IP27c) or Slip EMT Tape Prior to Pour Coupling Slip EMT Coupling **PVC Conduit PVC Conduit PVC Conduit** Concrete

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

PVC Conduit



PVC Schedule 40 & 80 Slip to Stainless Steel





Transitions in One Minute



Save Cost on the Rigid Nipple, Tape & Labor

Use for Entire Job - Not Just for Repair

Reamer NOT Required to Transition from PVC to Stainless Steel Conduit

Apply PVC Cement to Secure & Complete







Attach Stainless Steel Conduit to Slip Stainless Steel Coupling

Step 1

Install PVC Coupling on Conduit Flush or Just Below Grade and Cap wih (Conduit Plut IP27c) or Tape Prior to Pour



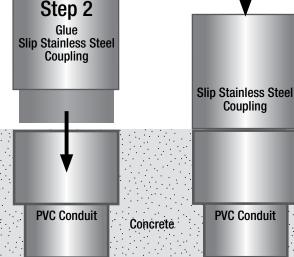

1/2" thru 4"

Transition Couplings		
Size	Catalog #	
1/2"	50 SLIP/SS	
3/4"	75 SLIP/SS	
1"	100 SLIP/SS	
1-1/4"	125 SLIP/SS	
1-1/2"	150 SLIP/SS	
2"	200 SLIP/SS	
2-1/2"	250 SLIP/SS	
3"	300 SLIP/SS	
3-1/2"	350 SLIP/SS	
4"	400 SLIP/SS	

All SP Products Inc. Transition
Fittings are manufactured for
installation to either meet or
exceed in accordance with
NEMA TC2, TC3 or UL 651
specifications

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

PVC Conduit



PVC Schedule 40 & 80 Slip to End Bell



Transitions in One Minute

Save Cost on the Rigid Nipple, Tape & Labor

Use for Entire Job - Not Just for Repair

Reamer NOT Required to Transition from PVC to End Bell



Step 2


Apply PVC Cement to Secure & Complete


1/2" thru 6"



Step 1

Install PVC Coupling on Conduit Flush or Just Below Grade and Cap with (Conduit Plut IP27c) or



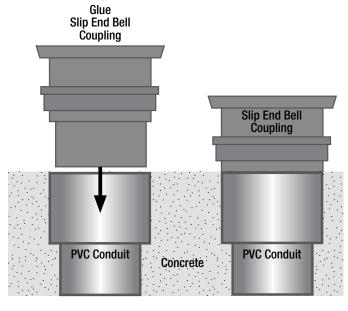

Transition Couplings		
Size	Catalog #	
1/2"	50 SLIP/EB	
3/4"	75 SLIP/EB	
1"	100 SLIP/EB	
1-1/4"	125 SLIP/EB	
1-1/2"	150 SLIP/EB	
2"	200 SLIP/EB	
2-1/2"	250 SLIP/EB	
3"	300 SLIP/EB	
3-1/2"	350 SLIP/EB	
4"	400 SLIP/EB	
5"	500 SLIP/EB	
6"	600 SLIP/EB	

All SP Products Inc. Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007 P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595 E: info@spproducts.com • www.spproducts.com

PVC Conduit

MADE IN USA

PVC Schedule 40 & 80 Slip to Smooth Bushing

Save at Least 1 HOUI per Installation.





Transitions in One Minute

Save Cost on the Rigid Nipple, Tape & Labor

Use for Entire Job - Not Just for Repair

Reamer NOT Required to Transition from PVC to Smooth Bushing (SB)

Apply PVC Cement to Secure & Complete


See Our


Conduit Plug

See page IP27c

Step 1

Install PVC Coupling on Conduit Flush or Just Below Grade and Cap wih (Conduit Plut IP27c) or Tape Prior to Pour



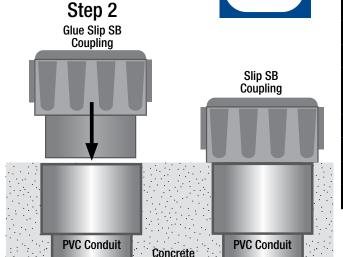

1/2" thru 4"

Transition Couplings		
Size	Catalog #	
1/2"	50 SLIP/SB	
3/4"	75 SLIP/SB	
1"	100 SLIP/SB	
1-1/4"	125 SLIP/SB	
1-1/2"	150 SLIP/SB	
2"	200 SLIP/SB	
2-1/2"	250 SLIP/SB	
3"	300 SLIP/SB	
3-1/2"	350 SLIP/SB	
4"	400 SLIP/SB	

All SP Products Inc. Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

SEE WEBSITE VIDEO IP12h

PVC Conduit



Transition Slip Couplings



PVC Schedule 40 & 80 Slip to HDPE Conduit



Step 3

BonDuit and BonDuit XI are

UL recognized and was tested to

UL standard 746C.

- Step 1 Install PVC Coupling prior to pour and cap (Conduit Plug IP27c) or tape
- Step 2 Glue Slip Coupling into PVC Coupling
- Step 3 Install HDPE Conduit using Polywater® Bonduit® Conduit Adhesive to connect to PVC Slip Coupling


1/2" thru 4"


Transition Couplings	
Size	Catalog #
1/2"	50 SLIP/HDPE
3/4"	75 SLIP/HDPE
1"	100 SLIP/HDPE
1-1/4"	125 SLIP/HDPE
1-1/2"	150 SLIP/HDPE
2"	200 SLIP/HDPE
2-1/2"	250 SLIP/HDPE
3"	300 SLIP/HDPE
3-1/2"	350 SLIP/HDPE
4"	400 SLIP/HDPE
5"	500 SLIP/HDPE
6"	600 SLIP/HDPE

All SP Products Inc. Transition
Fittings are manufactured for
installation to either meet or
exceed in accordance with
NEMA TC2, TC3 or UL 651
specifications

Using Polywater® BonDuit®
Conduit Adhesive creates a
permanent watertight/airtight seal
connecting PVC to HDPE.

Stronger pullout strength than most mechanical couplings.





Use On Entire Job Not Just For Repair!









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

Concrete



Transition Slip Couplings



PVC Schedule 40 & 80 Slip to Fiberglass Conduit



Step 3

BonDuit and BonDuit XI are

UL recognized and was tested to

UL standard 746C.


- Step 1 Install PVC Coupling prior to pour and cap (Conduit Plug IP27c) or tape
- Step 2 Glue Slip Coupling into PVC Coupling
- Step 3 Install Fiberglass Conduit using Polywater® Bonduit® Conduit Adhesive to connect to PVC Slip Coupling


1/2" thru 4"

Transition Couplings		
Size	Catalog #	
1/2"	50 SLIP/FIBER	
3/4"	75 SLIP/FIBER	
1"	100 SLIP/FIBER	
1-1/4"	125 SLIP/FIBER	
1-1/2"	150 SLIP/FIBER	
2"	200 SLIP/FIBER	
2-1/2"	250 SLIP/FIBER	
3"	300 SLIP/FIBER	
3-1/2"	350 SLIP/FIBER	
4"	400 SLIP/FIBER	
5"	500 SLIP/FIBER	
6"	600 SLIP/FIBER	

All SP Products Inc. Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications Using Polywater® BonDuit®
Conduit Adhesive creates a
permanent watertight/airtight seal
connecting PVC to Fiberglass.

Stronger pullout strength than most mechanical couplings.



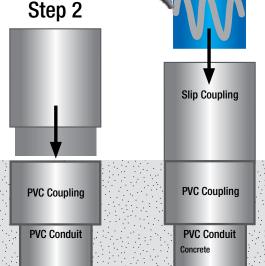

Use On Entire Job Not Just For Repair!









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

PVC CONDUIT SCH 40 & 80 TAPERED FITTINGS
USED WITH REAMING BITS





PVC CONDUIT SCH 40 & 80
BELL END
NO REAMING BITS REQUIRED











All SP Products Inc. Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications.

SLIP FITTINGS NO REAMING BITS REQUIRED



MADE IN USA

COMBO FITTINGS NO REAMING BITS REQUIRED



See conduit sizing charts on pages IP13a thru IP13v

Use On Entire Job - Not Just For Repair! Sizes From 1/2" thru 6"

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



PVC Schedule 40 & 80 to PVC Conduit

Save at Least 1 HOUI per Installation.



Prevents Damage to **PVC Risers**

Use for Entire Job - Not Just for Repair




All SP Products Inc.
Transition Fittings are
manufactured for
installation to either
meet or exceed
in accordance with
NEMA TC2, TC3 or
UL 651 specifications





1/2" thru 6"


Transition Couplings UL Listed up thru 6"	
Size	Catalog #
1/2"	50PVC/PVC
3/4"	75PVC/PVC
1"	100PVC/PVC
1-1/4"	125PVC/PVC
1-1/2"	150PVC/PVC
2"	200PVC/PVC
2-1/2"	250PVC/PVC
3"	300PVC/PVC
3-1/2"	350PVC/PVC
4"	400PVC/PVC
5"	500PVC/PVC
6"	600PVC/PVC

All Above Meet UL651 CSA C22.2, No.85 and US Army Corps Engineers Specifications









Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



c U us PATENTED PVC Schedule 40 & 80 to EMT Conduit

Save at Least 1 HOUI per Installation.



Transitions in Less Than 5 Minutes!

Save Cost on the Rigid Nipple, Tape & Labor

Use for Entire Job - Not Just for Repair




1/2" thru 4"


All SP Products Inc.
Transition Fittings are
manufactured for
installation to either
meet or exceed
in accordance with
NEMA TC2, TC3 or
UL 651 specifications





Transition Couplings	
Size	Catalog #
1/2"	50PVC/EMT
3/4"	75PVC/EMT
1"	100PVC/EMT
1-1/4"	125PVC/EMT
1-1/2"	150PVC/EMT
2"	200PVC/EMT
2-1/"	250-PVC/EMT
3"	300PVC/EMT
3-1/2"	350PVC/EMT
4"	400PVC/EMT

For any size conduit and configuration either galvanized or stainless steel. Consult Factory









Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED





PVC Schedule 40 & 80 to Rigid Conduit

Save at Least 1 HOUT per Installation.



All SP Products Inc. Transition Fittings are

manufactured for

installation to either

meet or exceed

in accordance with NEMA TC2, TC3 or UL 651 specifications

SEE WEBSITE VIDEO IP13c

Transitions in Less Than 5 Minutes!


Save Cost on the Rigid Nipple, Tape & Labor


Use for Entire Job - Not Just for Repair





1/2" thru 6"

Transition Couplings	
Size	Catalog #
1/2"	50PVC/RGD
3/4"	75PVC/RGD
1"	100PVC/RGD
1-1/4"	125PVC/RGD
1-1/2"	150PVC/RGD
2"	200PVC/RGD
2-1/2"	250PVC/RGD
3"	300PVC/RGD
3-1/2"	350PVC/RGD
4"	400PVC/RGD
5"	500PVC/RGD
6"	600PVC/RGD









Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



PVC Schedule 40 & 80 to Flexible Metal Conduit

Save at Least 1 HOUT per Installation.





Transitions in Less Than 5 Minutes!

Save Cost on the Rigid Nipple, Tape & Labor

Use for Entire Job - Not Just for Repair





All SP Products Inc.


Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications


1/2" thru 1-1/2"

Transition Couplings	
Size	Catalog #
1/2"	50PVC/FLEX
3/4"	75PVC/FLEX
1"	100PVC/FLEX
1-1/4"	125PVC/FLEX
1-1/2"	150PVC/FLEX









Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED





Save at Least 1 Hour per Installation.




PATENTED

Transitions in Less Than 5 Minutes!

Save Cost on the Rigid Nipple, Tape & Labor


Use for Entire Job - Not Just for Repair





All SP Products Inc. Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications


1/2" thru 4"

Transition Couplings	
Size	Catalog #
1/2"	50PVC/EMT-C
3/4"	75PVC/EMT-C
1"	100PVC/EMT-C
1- 1/4"	125PVC/EMT-C
1-1/2"	150PVC/EMT-C
2"	200PVC/EMT-C
2-1/2"	250PVC/EMT-C
3"	300PVC/EMT-C
4"	400PVC/EMT-C









Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



PVC Schedule 40 & 80 to Sealtite/Liquidtite

Save at Least


1 HOUI per Installation.



Transitions in Less Than 5 Minutes!

Save Cost on the Rigid Nipple, Tape & Labor


Use for Entire Job - Not Just for Repair





All SP Products Inc.
Transition Fittings are
manufactured for
installation to either
meet or exceed
in accordance with
NEMA TC2, TC3 or
UL 651 specifications


1/2" thru 4"

Transition Couplings	
Size	Catalog #
1/2"	50-PVC/LIQ
3/4"	75PVC/LIQ
1"	100PVC/LIQ
1- 1/4"	125PVC/LIQ
1 -1/2"	150PVC/LIQ
2"	200PVC/LIQ
2 -1/2"	250PVC/LIQ
3"	300PVC/LIQ
3 -1/2"	350PVC/LIQ
4"	400PVC/LIQ









Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED





PVC Schedule 40 & 80 to Aluminum Conduit

Save at Least 1 HOUI per Installation.

C(VL) us PATENTED



Transitions in Less Than 5 Minutes!

Save Cost on the Rigid Nipple, Tape & Labor


Use for Entire Job - Not Just for Repair





1/2" thru 6"


All SP Products Inc.
Transition Fittings are
manufactured for
installation to either
meet or exceed
in accordance with
NEMA TC2, TC3 or
UL 651 specifications

Transition Couplings	
Size	Catalog #
1/2"	50PVC/ALUM
3/4"	75PVC/ALUM
1"	100PVC/ALUM
1-1/4"	125PVC/ALUM
1½"	150PVC/ALUM
2"	200PVC/ALUM
2-1/2"	250PVC/ALUM
3″	300PVC/ALUM
3-1/2 [′]	350PVC/ALUM
4"	400PVC/ALUM
5"	500PVC/ALUM
6"	600PVC/ALUM









Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



Transition Fittings





Save at Least Hour per Installation.





Transitions in Less Than 5 Minutes!


Save Cost on the Rigid Nipple, Tape & Labor


Use for Entire Job -Not Just for Repair





1/2" thru 4"

	Trans	sition Couplings
All SP Products Inc.	Size	Catalog #
Transition Fittings are	1/2"	50PVC/SS
manufactured for	3/4"	75PVC/SS
installation to either	1″	100PVC/SS
meet or exceed	1-1/4″	125PVC/SS
in accordance with	1-1/2″	150PVC/SS
NEMA TC2, TC3 or	2″	200PVC/SS
UL 651 specifications	2-1/2″	250PVC/SS
	3″	300PVC/SS
	3-1/2"	350PVC/SS
	4"	400PVC/SS









Customer must satisfy all codes and owners' specifications.







PATENT PENDING PATENTED





PVC Schedule 40 & 80 End Bell to Galvanized Rigid Conduit




Quickly Transition
Galvanized Rigid or
Rigid Nipple Conduit
to Pvc End Bell





1/2" thru 6"

	Transition Couplings		
Size	Catalog #		
1/2"	50-GRC-EB		
3/4"	75-GRC-EB		
1″	100-GRC-EB		
1-1/4″	125-GRC-EB		
1½″	150-GRC-EB		
2″	200-GRC-EB		
2-1/2"	250-GRC-EB		
3″	300-GRC-EB		
3-1/2"	350-GRC-EB		
4″	400-GRC-EB		
5"	500-GRC-EB		
6"	600-GRC-EB		

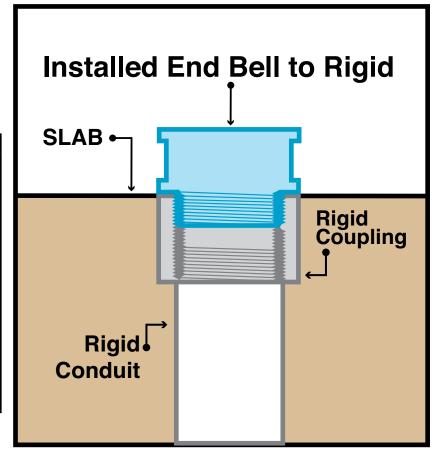

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



Transition Bushing Adapter





SCH 40 PVC to Smooth Bushing



Smooth edge allows trouble free wire pulls

3 Holes on 120° centers to receive tapped lugs

Transition Bushing Adapter for Pulling Wire

SIZE	CAT#
1/2"	50PVC/SB
3/4"	75PVC/SB
1"	100PVC/SB
1-1/4"	125PVC/SB
1-1/2"	150PVC/SB
2"	200PVC/SB
2-1/2"	250PVC/SB
3"	300PVC/SB
3-1/2"	350PVC/SB
4"	400PVC/SB

Install one with every connector

Ideal for installing transformers & switchgear

Transition Bushing Adapter for Pulling Grounding Wire

SIZE	CAT#
1/2"	50PVC/GSB
3/4"	75PVC/GSB
1"	100PVC/GSB
1-1/4"	125PVC/GSB
1-1/2"	150PVC/GSB
2"	200PVC/GSB
2-1/2"	250PVC/GSB
3"	300PVC/GSB
3-1/2"	350PVC/GSB
4"	400PVC/GSB

(Standard Slick Nut includes 1 Lug)

Must install 3 Lugs for UL Listing, extra lugs sold separately.

Consult Factory for prices and availability

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED





PVC Schedule 40 & 80 to Inside PVC to Inside PVC

Save at Least 1 HOUT per Installation.






Saves a Great Deal of Time Repairing Conduit

The Inside Diameter Remains the Same

Allows for Trouble Free Wire and Cable Pulss





SEE WEBSITE VIDEO IP13k


1/2" thru 6"


All SP Products Inc.
Transition Fittings are
manufactured for
installation to either
meet or exceed
in accordance with
NEMA TC2, TC3 or
UL 651 specifications

Transition Couplings	
Size	Catalog #
1/2"	50PVC-IN/PVC-IN
3/4"	75PVC-IN/PVC-IN
1″	100PVC-IN/PVC-IN
1-1/4"	125PVC-IN/PVC-IN
1½″	150PVC-IN/PVC-IN
2″	200PVC-IN/PVC-IN
2-1/2"	250PVC-IN/PVC-IN
3″	300PVC-IN/PVC-IN
3-1/2″	350PVC-IN/PVC-IN
4″	400PVC-IN/PVC-IN
5"	500PVC-IN/PVC-IN
6"	600PVC-IN/PVC-IN









Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007 P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595 E: info@spproducts.com • www.spproducts.com

IP13k



PVC Schedule 40 & 80 to PVC/PVC Threaded


Save at Least 1 HOUT per Installation.



Save a Great Deal of Time Repairing Conduit

The Inside Diameter Remains the Same

Allows for Trouble Free Wire and Cable Pulls

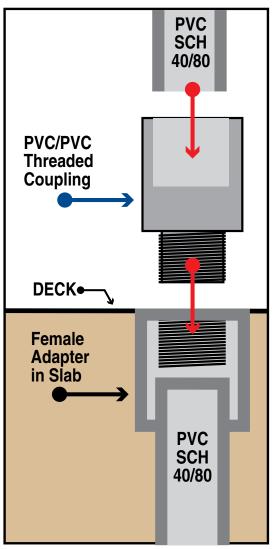



All SP Products Inc.

Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications

1/2" thru 6"

Transition Couplings	
Size	Catalog #
1/2"	50-PVC/PVC-THR
3/4"	75-PVC/PVC-THR
1″	100-PVC/PVC-THR
1-1/4″	125-PVC/PVC-THR
1-1/2"	150-PVC/PVC-THR
2″	200-PVC/PVC-THR
2-1/2"	250-PVC/PVC-THR
3″	300-PVC/PVC-THR
3-1/2"	350-PVC/PVC-THR
4″	400-PVC/PVC-THR
5"	500-PVC/PVC-THR
6"	600-PVC/PVC-THR

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED







PVC Schedule 40 & 80 to to Threaded PVC Conduit

See Our
Conduit Plug
See page IP27c

See Our
REAMING BITS for
Transition Couplings

See page IP15

Install on Concrete or Masonry Walls

Support Box with Lock Nut

Supports Conduit Runs in Any Direction

Eliminate Metal Box, Hardware, Tape & Labor Cost





Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED







PVC Schedule 40 & 80 to Slip PVC to Threaded PVC


Install on Concrete or Masonry Walls

Support Box with Lock Nut

Supports Conduit Runs in Any Direction

Eliminate Metal Box, Hardware, Tape & Labor Cost



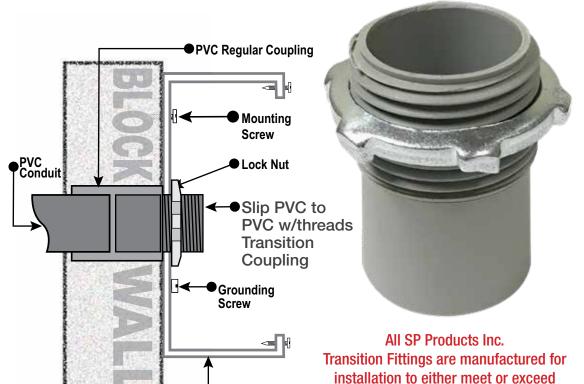

All Boxes

& Wireways

PATENT PENDING

1/2" thru 6"

Transition Couplings UL Listed up thru 2½"	
Size	Catalog #
1/2"	50-SLIP/PVC-T
3/4"	75-SLIP/PVC-T
1″	100-SLIP/PVC-T
1-1/4"	125-SLIP/PVC-T
1-1/2″	150-SLIP/PVC-T
2″	200-SLIP/PVC-T
2-1/2"	250-SLIP/PVC-T
3″	300-SLIP/PVC-T
3-1/2″	350-SLIP/PVC-T
4″	400-SLIP/PVC-T
5"	500-SLIP/PVC-T
6"	600-SLIP/PVC-T

Customer must satisfy all codes and owners' specifications.

E: info@spproducts.com • www.spproducts.com







in accordance with NEMA TC2, TC3 or

UL 651 specifications



PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



See Our Conduit Plug

See page IP27c

NO

REAMING

NEEDED!

PVC Tapered to Threaded Transition Couplings

to PVC Conduit Exiting Concrete Slab
PVC Schedule 40 & 80


Save at Least **HOUI** per Installation.



Transitions in Less Than 5 Minutes!

Save Cost on the Rigid Nipple, Tape & Labor

Use for Entire Job - Not Just for Repair



STEP 2


1/2" thru 6"


Saves a great deal of time transitioning from PVC conduit to MC Cable conduit above slab without damaging PVC risers and chipping concrete eliminating a concrete repair job!


All SP Products Inc.
Transition Fittings are
manufactured for
installation to either
meet or exceed
in accordance with
NEMA TC2, TC3 or
UL 651 specifications


Transition Couplings	
Size	Catalog #
1/2"	50-PVC-T-THR
3/4"	75-PVC-T-THR
1″	100-PVC-T-THR
1-1/4″	125-PVC-T-THR
1-1/2"	150-PVC-T-THR
2″	200-PVC-T-THR
2-1/2"	250-PVC-T-THR
3″	300-PVC-T-THR
3-1/2″	350-PVC-T-THR
4″	400-PVC-T-THR
5"	450-PVC-T-THR
6"	500-PVC-T-THR

All Above Meet UL651 CSA C22.2, No.85 and US Army Corps Engineers Specifications









Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



3/4" PVC Schedule 40/80 to Greenfield or MC Cable

Save at Least HOUI per Installation. When Exiting Concrete Slab and Feeding to Load Centers.

Transitions in Less Than 5 Minutes!

Save Cost on the Rigid Nipple, Tape & Labor

Use for Entire Job - Not Just for Repair








Size	Cat#
3/4" x 1	75PVC-38/50 MC
3/4" x 2	75PVC-38/50 MC/DC


Saves a great deal of time transitioning from PVC conduit to Greenfield or MC Cable conduit above slab without damaging PVC risers and chipping concrete eliminating a concrete repair job!

All SP Products Inc. Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications









Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

PVC REDUCERS



PVC SCH 40 & 80

Reduce any size PVC conduit to a smaller size PVC conduit


PVC Sch 40/80 Reducers from 3/4" to 6" any size combination available

Sample of Catalog Number:

75 PVC conduit through 600 PVC conduit - 100 PVC Reducer through 600 PVC Reducer or any size combinations in between.

Example: P/N 200PVC-125PVC Reducer Sch40 = 2" PVC to 1-1/4" PVC Reducer Sch40









Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE


730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP13q

Transition Couplings PVC Bell End Adapter Galvanized Rigid Conduit





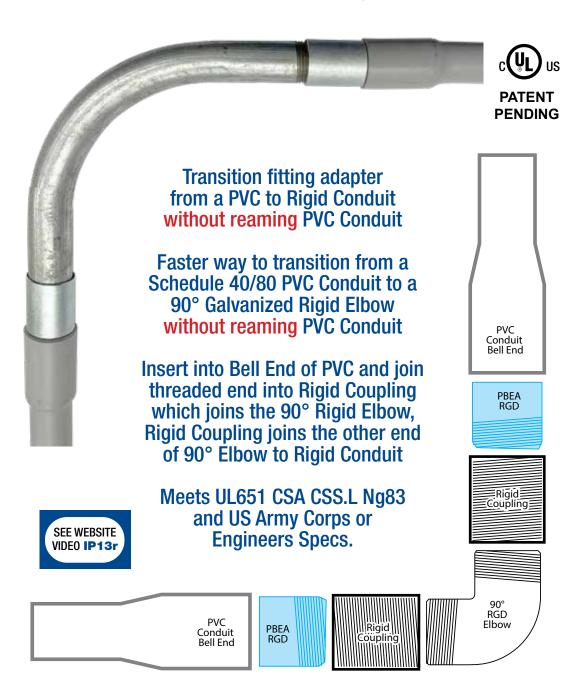



1/2" thru 6"

Transition Couplings	
Size	Catalog #
1/2"	PBEA/RGD 50
3/4"	PBEA/RGD 75
1″	PBEA/RGD 100
1-1/4″	PBEA/RGD 125
1½″	PBEA/RGD 150
2″	PBEA/RGD 200
2-1/2″	PBEA/RGD 250
3″	PBEA/RGD 300
3-1/2"	PBEA/RGD 350
4″	PBEA/RGD 400
5"	PBEA/RGD 500
6"	PBEA/RGD 600

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



MADE IN USA

PVC Bell End Adapter

to **EMT** Conduit



EMT Conduit



PVC Bell End to EMT Transition Coupling

PVC Conduit Bell End Transition fitting adapter from a PVC to EMT Conduit

Faster way to transition from a Schedule 40/80 PVC Conduit to EMT Conduit without reaming PVC Conduit

Insert into Bell End of PVC and Join with EMT Conduit by tightening bolt

Meets UL651 CSA CSS.L Ng83 and US Army Corps or Engineers Specs.



Transition Couplings	
Size	Catalog #
1/2"	PBEA/EMT 50
3/4"	PBEA/EMT 75
1″	PBEA/EMT 100
1-1/4″	PBEA/EMT 125
1½″	PBEA/EMT 150

Transition Couplings	
Size	Catalog #
2″	PBEA/EMT 200
2-1/2"	PBEA/EMT 250
3″	PBEA/EMT 300
3-1/2"	PBEA/EMT 350
4″	PBEA/EMT 400



PATENT PENDING

Customer must satisfy all codes and owners' specifications.

P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595 E: info@spproducts.com • www.spproducts.com









PATENT PENDING PATENTED








PVC Bell End Adapter to Liquidtite Conduit



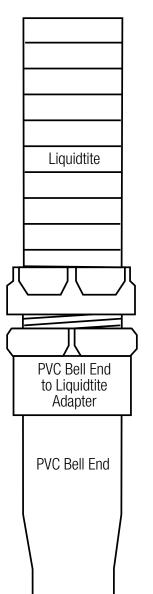

Transition fitting adapter from a PVC to Liquidtite Conduit

Faster way to transition from a Schedule 40/80 PVC Conduit to Liquidtite Conduit without reaming PVC Conduit

Insert into Bell End of PVC and Join end into Liquidtite Conduit

Meets UL651 CSA CSS.L Ng83 and US Army Corps or Engineers Specs.

1/2" thru 4"

Transition Couplings	
Size	Catalog #
1/2"	PBEA/LIQ 50
3/4"	PBEA/LIQ 75
1″	PBEA/LIQ 100
1-1/4″	PBEA/LIQ 125
1½″	PBEA/LIQ 150
2″	PBEA/LIQ 200
2-1/2″	PBEA/LIQ 250
3″	PBEA/LIQ 300
3-1/2″	PBEA/LIQ 350
4″	PBEA/LIQ 400

All SP Products Inc. Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or **UL 651 specifications**







Customer must satisfy all codes and owners' specifications.









PATENT PENDING **PATENTED**









Transition fitting adapter from a PVC to Flexible Conduit

Faster way to transition from a Schedule 40/80 PVC Conduit to Flexible Conduit without reaming PVC Conduit

Insert into Bell End of PVC and Join end into Flexible Conduit

Meets UL651 CSA CSS.L Ng83 and US Army Corps or Engineers Specs.



1/2" thru 1-1/2"

Transition Couplings	
Size	Catalog #
1/2"	PBEA/FLEX 50
3/4"	PBEA/FLEX 75
1″	PBEA/FLEX 100
1-1/2″	PBEA/FLEX 150

PATENTED



All SP Products Inc. Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or **UL 651 specifications**

Customer must satisfy all codes and owners' specifications.



Flexible

Conduit

PVC Bell End

to Flexible Conduit Adapter

PVC Bell Fnd







PATENT PENDING **PATENTED**





Galvanized Rigid
Transition Couplings
to Schedule 40/80 PVC Stub-Up



Save at Least **HOUI** per Installation.




When Concrete is Poured and Metal Below the Slab is Needed

Transitions in Less Than 5 Minutes!

Save Cost on the Rigid Nipple, Tape & Labor


Use for Entire Job - Not Just for Repair




1/2" thru 6"


Transition Couplings		
Size	Catalog #	
1/2"	50-PVC-R-GRC	
3/4"	75-PVC-R-GRC	
1″	100-PVC-R-GRC	
1-1/4″	125-PVC-R-GRC	
1-1/2″	150-PVC-R-GRC	
2″	200-PVC-R-GRC	
2-1/2"	250-PVC-R-GRC	
3″	300-PVC-R-GRC	
3-1/2"	350-PVC-R-GRC	
4″	400-PVC-R-GRC	
5"	500-PVC-R-GRC	
6"	600-PVC-R-GRC	


All Above Meet UL651 CSA C22.2, No.85 and US Army Corps Engineers Specifications






VIDEO IP13v



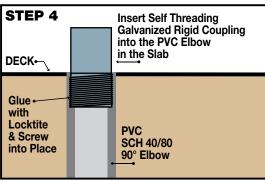

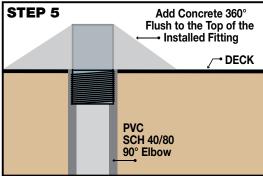

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED





Sealtite/Liquidtite to Galvanized Rigid Conduit



Transitions from Liquidtite to RGD in minutes

Great for wiring transformers, solar systems & pumps.

All SP Products Inc.
Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications

PRODUCTS, INC

Productivity and value thru ideas

PATENT PENDING





1/2" thru 4"

Transition Couplings			
Size	Catalog #		
1/2"	50-LT-RGD		
3/4"	75-LT-RGD		
1"	100-LT-RGD		
1 -1/4"	125-LT-RGD		
1 -1/2"	150-LT-RGD		
2"	200-LT-RGD		
2 -1/2"	250-LT-RGD		
3"	300-LT-RGD		
3 -1/2" 350-LT-RGD			
4" 400-LT-RGD			









PATENT PENDING PATENTED







Sealtite/Liquidtite to EMT



Transitions from Liquidtite to EMT in minutes

Great for wiring transformers, solar systems & pumps.

All SP Products Inc.

Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications

PENDING





1/2" thru 4"

Transition Couplings		
Size	Catalog #	
1/2"	50-LT-EMT	
3/4"	75-LT-EMT	
1"	100-LT-EMT	
1- 1/4"	125-LT-EMT	
1 -1/2"	150-LT-EMT	
2"	200-LT-EMT	
2 -1/2"	250-LT-EMT	
3"	300-LT-EMT	
3 -1/2"	350-LT-EMT	
4"	4" 400-LT-EMT	









PATENT PENDING PATENTED





730 Pratt Boulevard • Elk Grove Village, IL 60007 P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595 E: info@spproducts.com • www.spproducts.com

MADE



Sealtite/Liquidtite to EMT Compression



Transitions from Liquidtite to EMT Compression in minutes

Great for wiring transformers, solar systems & pumps.

All SP Products Inc.

Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications

PATENT PENDING





1/2" thru 4"

Transition Couplings			
Size	Catalog #		
1/2"	50-LT-EMT-C		
3/4"	75-LT-EMT -C		
1"	100-LT-EMT-C		
1 -1/4"	125-LT-EMT-C		
1 -1/2"	150-LT-EMT-C		
2"	200-LT-EMT-C		
2 -1/2"	250-LT-EMT-C		
3"	300-LT-EMT-C		
3 -1/2"	350-LT-EMT-C		
4" 400-LT-EMT-C			









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



Galvanized Rigid Conduit to **EMT**



Transitions from RGD to EMT in minutes

Great for wiring transformers, solar systems & pumps.

All SP Products Inc.

Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications

PATENT PENDING





1/2" thru 4"

Transition Couplings		
Size	Catalog #	
1/2"	50-RGD-EMT	
3/4"	75-RGD-EMT	
1"	100-RGD-EMT	
1- 1/4"	125-RGD-EMT	
1 -1/2"	150-RGD-EMT	
2"	200-RGD-EMT	
2 -1/2"	250-RGD-EMT	
3"	300-RGD-EMT	
3 -1/2"	350-RGD-EMT	
4" 400-RGD-EMT		









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP13dd



Galvanized Rigid Conduit to EMT Compression



Transitions from RGD to EMT Compression in minutes

Great for wiring transformers, solar systems & pumps.

All SP Products Inc. **Transition Fittings are manufactured** for installation to either meet or exceed in accordance with NEMA TC2.

TC3 or UL 651 specifications

PENDING





1/2" thru 4"

Transition Couplings		
Size Catalog #		
1/2"	50-RGD-EMT-C	
3/4"	75-RGD-EMT-C	
1"	100-RGD-EMT-C	
1 -1/4"	125-RGD-EMT-C	
1 -1/2"	150-RGD-EMT-C	
2"	200-RGD-EMT-C	
2 -1/2"	250-RGD-EMT-C	
3"	300-RGD-EMT-C	
3 -1/2"	350-RGD-EMT-C	
4"	400-RGD-EMT-C	











PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

Flexible Conduit to EMT





Transitions from Flex to EMT in minutes



1/2" thru 4"

Transition Couplings Size Catalog # 1/2" 50-FLEX-EMT 75-FLEX-EMT 3/4" 100-FLEX-EMT 1-1/4" 125-FLEX-EMT 1-1/2" 150-FLEX-EMT 2" 200-FLEX-EMT 2-1/2 250-FLEX-EMT 300-FLEX-EMT 3" 3 -1/2" 350-FLEX-EMT 400-FLEX-EMT

Great for wiring transformers, solar systems & pumps.

All SP Products Inc.

Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications

PATENT PENDING










PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



Sizes 1/2" thru 6"

Catalog #

Size

PVC End Bell Adapter PVC Schedule 40 & 80

Allows Faster Trouble Free Wire Pulls **Use for Entire Job - Not Just for Repair**

Stub Up, Cut Flush to Slab, Ream Out PVC, Glue in End Bell, Cap Conduit for a

Professional Looking Job!

PATENT PENDING

Qwikduct Templates can be used with all standardized trade size conduit specified per NPA 70 NEC




1/2" PEBA#50 PEBA#75 3/4" **PEBA#100 PEBA#125** 1-1/4" PEBA#150 1-1/2" **PEBA#200** 2" PEBA#250 2-1/2" 3" PEBA#300 PEBA#350 3-1/2" **PEBA#400 PEBA#500** 6" **PEBA#600**

All Above Meet UL651 CSA C22.2, No.85 and US Army Corps Engineers Specifications







Perfect for use with QwikDuct HDPE Templates for Railway, Highway & Tollway



1. Align QwikDuct close to manhole or vault



2. Ream out conduits and glue on end bell adapters to each conduit inside or outside manhole or vault



3. Slide conduits with bell end adapters thru manhole openings inside or outside manhole or vault

Customer must satisfy all codes and owners' specifications.










PATENT PENDING PATENTED



Threaded MADE MADE MUSA End Bell Adapter PVC Schedule 40 & 80





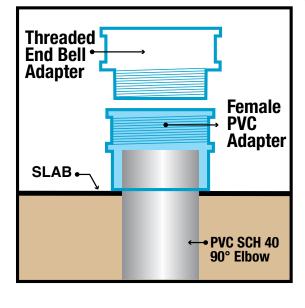



1/2" thru 6"

Catalog #	Size
PEBAT#50	1/2"
PEBAT#75	3/4"
PEBAT#100	1"
PEBAT#125	1-1/4"
PEBAT#150	1-1/2"
PEBAT#200	2'
PEBAT#250	2-1/2"
PEBAT#300	3"
PEBAT#350	3-1/2"
PEBAT#400	4"
PEBAT#500	5"
PEBAT#600	6"

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

Schedule 40 & 80

PVC MADE IN USA
Reaming
Bits

for Transition Couplings

1-Piece

Larger sizes available on special order

1/2" thru 6"

1/2" thru 4"

5" & 6" 3/4" Chuck






High Quality Steel Sharpenable for Long Life

See Our
CHUCK ADAPTERS
from 3/4" to 1/2"

See page IP15

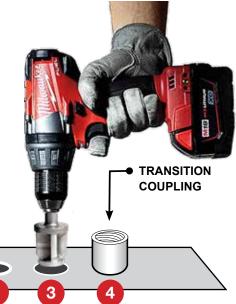

- 1-PVC Stub-Up
- 2-Cut Stub-Up flush to slab
- 3-Ream out PVC
- 4-Install required transition coupling

PVC Conduit Size	SCH 40 PVC Catalog #	PVC Conduit Size	SCH 40 PVC Catalog #
1/2″	IPRB50-SCH 40	2-1/2″	IPRB250-SCH 40
3/4″	IPRB75-SCH 40	3″	IPRB300-SCH 40
1″	IPRB100-SCH 40	3-1/2″	IPRB350-SCH 40
1-1/4″	IPRB125-SCH 40	4"	IPRB400-SCH 40
1-1/2″	IPRB150-SCH 40	5"	IPRB500-SCH 40
2"	IPRB200-SCH 40	6"	IPBR600-SCH 40

PLEASE SPECIFY IF USING FOR SCH 40 OR SCH 80

PVC Conduit Size	SCH 80 PVC Catalog #	PVC Conduit Size	SCH 80 PVC Catalog #
1/2″	IPRB50-SCH 80	2-1/2″	IPRB250-SCH 80
3/4″	IPRB75-SCH 80	3″	IPRB300-SCH 80
1″	IPRB100-SCH 80	3-1/2″	IPRB350-SCH 80
1-1/4″	IPRB125-SCH 80	4″	IPRB400-SCH 80
1-1/2″	IPRB150-SCH 80	5"	IPRB500-SCH 80
2″	IPRB200-SCH 80	6"	IPBR600-SCH 80

NO PARTS TO LOSE ON THE JOB SITE!

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

Chamfer Bitsfor SCH 40/80 PVC Conduits




Conduit reaming tool smooths wall of conduit with a 30° chamfer around all 360° of conduit to eliminate sharp edges to prevent wire damage and to receive mandrel for wire pull.


Meets utility requirements.

Tool works for both Shcedule 40 & 80.

1-Piece

Larger sizes available on special order 1/2" thru 6"

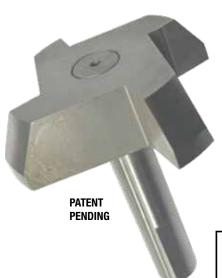

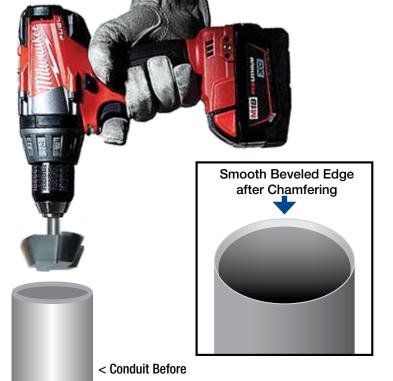

PVC Conduit Size	SCH 40/80 Catalog #	PVC Conduit Size	SCH 40/80 Catalog #
1/2″	CHRB50-SCH 40/80	3"	CHRB300-SCH 40/80
3/4″	CHRB75-SCH 40/80	3-1/2″	CHRB350-SCH 40/80
1″	CHRB100-SCH 40/80	4"	CHRB400-SCH 40/80
1-1/4	CHRB125-SCH 40/80	5"	CHRB500-SCH 40/80
1-1/2″	CHRB150-SCH 40/80	6"	CHRB600-SCH 40/80
2″	CHRB200-SCH 40/80	8"	CHRB800-SCH 40/80
2-1/2″	CHRB250-SCH 40/80		

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



NEW Chuck Adapter From 3/4" to 1/2"




Perfect for use with SP's PVC Tools









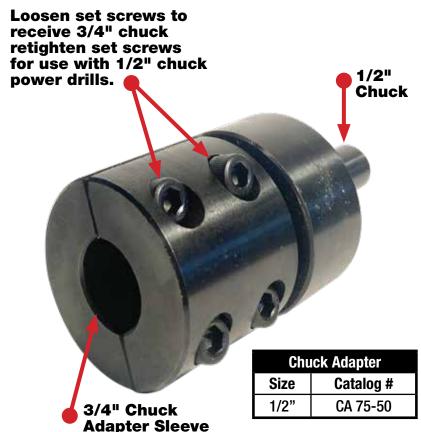









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



Chamfer Bits



for Aluminum

& Galvanized Rigid Conduit

• Deburrs at any location

• Provides smooth chamfer

• Safer, Better & Faster

Works with any type of drill

with 1/2" chuck






See page IP15



Conduit Sizes 1/2" thru 2-1/2"





Catalog #	Conduit Size	
ALCE-50-75-100	1/2″-3/4"-1"	
ALCE-125-150	1-1/4"-1-1/2"	
ALCE-200-250	2"-2-1/2"	
ALCE-300-350	3"-3-1/2"″	
ALCE-400	4"	

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED





No Center Stop Slide On Couplings

Joins Conduit Lengths in Difficult Situations

Allows flexibility of movement for fast, easy installation of conduit in tight,

difficult situations.

PATENT PENDING UL LISTED FOR 3/4, 1, 2 & 4 inch UL514B & CSA C22.2 No. 18.3

(other sizes pending)

Completely smooth inside diameter with smooth bottomed adjustable center screw. No sharp edges to damage wire during pull.



- 1. Slide coupling over end of one conduit
- 2. Line up 2nd conduit and mark it to allow coupling to be slid back and centered over both conduits.
- 3. Slide coupling back to mark.
- 4. Tighten 3/8" hex head bolts and conduits are securely joined together at center of coupling.
- 5. Size ½ thru 2 inch = one bolt sizes 2½ and larger = 2 bolts at a 45° angle on each end

SIZ	Έ	CAT#	SIZE	CAT#
1/2		NCSC-50EMT	2"	NCSC-200EMT
3/4	."	NCSC-75EMT	2-1/2"	NCSC-250EMT
1"		NCSC-100EMT	3"	NCSC-300EMT
1-1/	'4 "	NCSC-125EMT	3-1/2"	NCSC-350EMT
1-1/	2"	NCSC-150EMT	4"	NCSC-400EMT

(Rigid Conduit Version Available Soon - Consult Factory)

Prevent Injury and Save Hours

Customer must satisfy all codes and owners' specifications.










PATENT PENDING PATENTED





Masonry Box Brackets


For 6, 8, 10 & 12 inch depth block walls




Strong 18 Gauge Galvanized Steel



Heat Treated or Stainless Steel also available





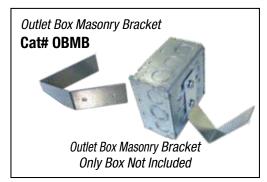

Customer must specify complete catalog numbers when ordering

- Bracket with box and connectors attached available as assembly
- Snaps on Box in seconds and firmly secures it in place.
- Taping available to keep water or mud out of box.

 Eliminate time lost, and code violations when water and mud enter the box plus aggravation when attempting to keep boxes properly aligned with glue, sticks, crushed paper, etc. and not solve the problem.



Masonry Box Brackets				
Вох	Depth	Catalog #		
1 Gang	6 inch	1GMBB-6		
1 Gang	8 inch	1GMBB-8		
1 Gang	10 inch	1GMBB-10		
1 Gang	12 inch	1GMBB-12		
2 Gang	6 inch	2GMBB-6		
2 Gang	8 inch	2GMBB-8		
2 Gang	10 inch	2GMBB-10		
2 Gang	12 inch	2GMBB-12		
Outlet	6 inch	OBMB-6		
Outlet	8 inch	OBMB-8		
Outlet	10 inch	OBMB-10		
Outlet	12 inch	OBMB-12		



Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED




LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

overd a Elk Crove Village II 60007

Adjustable Back Box Support



Extremely Strong & Fast Installation Snaps Onto Box in Seconds

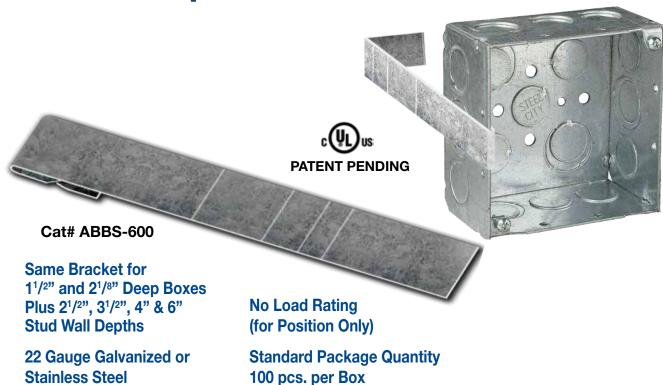

Stud

Box

Adjustable Back
Box Support Shown
with our BSB1-FTD
Bracket for Optional use
with Our Wall & Ceiling
Brackets and Standard or
Adjustable Mud Rings.

Compatible for Use with Our "Big O" and Fixed Position Brackets

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

Strong ALMAG 535 Material

4-Conduit Block




Support From Only One Rod

Threaded Block for Vertical Rod

OR

Threadless Block for Vertical Rod



Specify bolt size 1/4" or 3/8" required for the conduit clamp

ST=(side thread) 1/4" or 3/8"

Bolt Hex Head Slides into Slot

Bolt Hex into Slot

Standard Slots 1/4" 3/8" Available Upon Request **Head Slides**



PATENTED

THREADED BLOCK **NON-THREADED BLOCKS** 1/4 inch rod = Cat# TBT25-ST25 1/4 inch rod = Cat# TBT25-NT-ST25 1/4 inch rod = Cat# TBT25-ST38 1/4 inch rod = Cat# TBT25-NT-ST38

DWSD - Electrical Mechanical and HVAC Suspension System Accessories			
THREADED BLOCK	NON-THREADED BLOCKS		
3/8 inch rod = Cat# TBT38-ST25	3/8 inch rod = Cat# TBT38-NT-ST25		
3/8 inch rod = Cat# TBT38-ST38	3/8 inch rod = Cat# TBT38-NT-ST38		
1/2 inch rod = Cat# TBT50-ST25	1/2 inch rod = Cat# TBT50-NT-ST25		
1/2 inch rod = Cat# TBT50-ST38	1/2 inch rod = Cat# TBT50-NT-ST38		











Customer must satisfy all codes and owners' specifications.









PATENT PENDING **PATENTED**



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE




4-Conduit Block



Support From Only One Rod

For Threaded **Vertical Rod** 1/4", 3/8" or 1/2"

Specify Bolt Size 1/4" or 3/8" Required for the **Conduit Clamp**

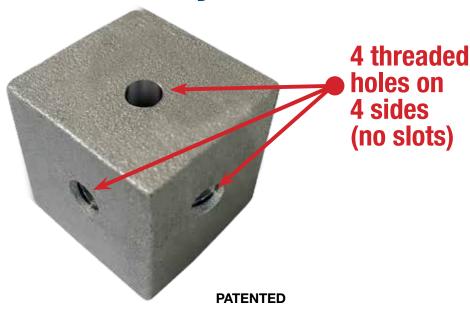







Install larger conduit overhead with our patented 4 conduit threaded support block.

THREADED BLOCK
1/4 inch rod = Cat# TBT25-ST25
1/4 inch rod = Cat# TBT25-ST38
3/8 inch rod = Cat# TBT38-ST25
3/8 inch rod = Cat# TBT38-ST38
1/2 inch rod = Cat# TBT50-ST25
1/2 inch rod = Cat# TBT50-ST38

NON-THREADED BLOCKS		
1/4 inch rod = Cat# TBT25-NT-ST25		
1/4 inch rod = Cat# TBT25-NT-ST38		
3/8 inch rod = Cat# TBT38-NT-ST25		
3/8 inch rod = Cat# TBT38-NT-ST38		
1/2 inch rod = Cat# TBT50-NT-ST25		
1/2 inch rod = Cat# TBT50-NT-ST38		

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



Box Support Rod Cubes



Support From Only One Rod



4 thru holes for Gripple applications

(RC) 3/8" & 1/4" hole for threaded & non-threaded rod

(ST) 1/4" or 3/8" threaded side hole for threaded rod, clamps or other supports

Non-Threaded **Box Support Rod Cubes**

1/4 inch Rod = Cat# RC25NT-ST25

1/4 inch Rod = Cat# RC25NT-ST38

3/8 inch Rod = Cat# RC38NT-ST25

3/8 inch Rod = Cat# RC38NT-ST38

Threaded

Box Support Rod Cubes

1/4 inch Rod = Cat# RC25-ST25

1/4 inch Rod = Cat# RC25-ST38

3/8 inch Rod = Cat #RC38-ST25

3/8 inch Rod = Cat #RC38-ST38



Support two conduits with clamps using 1/4" threaded holes on the sides of the Box Support Rod Cubes.



Install 2 boxes back to back with our Box Support Rod Cubes from a single threaded rod.



Compatible with Gripple cable applications to secure light fixtures.



Use Box Support Rod Cubes with J-Hangers

Versatile use for all trades!

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

IP20a



Support Hangers


for Cable Tray, Pipe, Conduit, Light Fixtures and Other Heavy Equipment


Safer - Better - Faster

Eliminates climbing and working above trusses. Install in seconds while standing on deck below.

CAT#	UPPER CHORD
THUC 38	3/8" 1,200 lb Static Load Rating
THUC 50	1/2" 1,200 lb Static Load Rating

CAT#	LOWER CHORD	
THLC 38	3/8" 1,200 lb Static Load Rating	
THLC 50	1/2" 1,200 lb Static Load Rating	

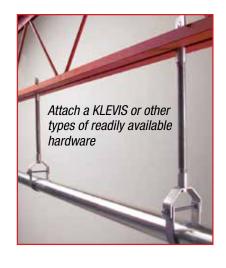

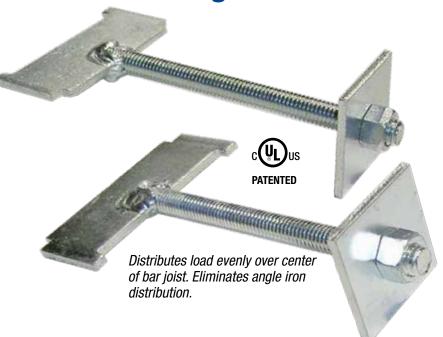

KEPS ®	
3/8"	
1/2"	



One piece KEPS® integrated nut/washer firmly locks into chord.

Provides rigid seismic restraint.

Seismic bracing not required when used in top chord applications (9.3.5.3.8 NFPA 13)

Meets UL 514A& CSA C22.2 No. 18.1

Suitable for Supporting Electrical, Fire Suppression, Plumbing, and HVAC Applications in Open Web Bar Joists

Customer must satisfy all codes and owners' specifications.










PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

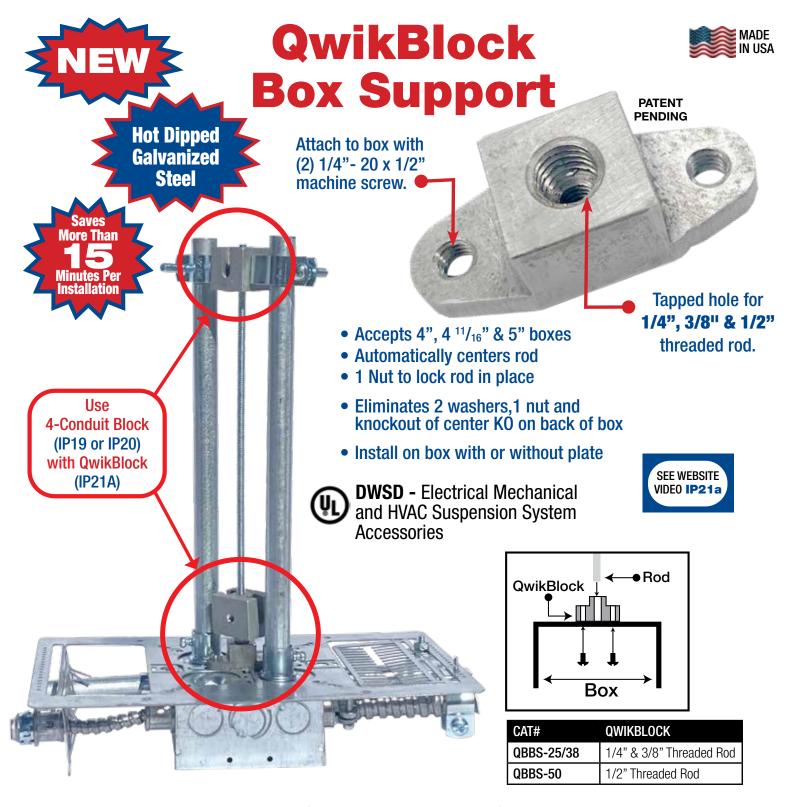

Works with Our Entire Line of Conduit and Box Support Plates for Fast and Easy Installation

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

Stub Up Slip Coupling



Allows flexibility of movement, slide down over conduit and bolt in place to set Transformers and Gear, Nipple up to Panels etc.

1/2 thru 4 inch Rigid Heavy Wall and PVC Conduit Stubs

SIZE	CAT#
1/2"	SOHWTC 50
3/4"	SOHWTC 75
1"	SOHWTC 100
1-1/4"	SOHWTC 125
1-1/2"	SOHWTC 150
2"	SOHWTC 200
2-1/2"	SOHWTC 250
3"	SOHWTC 300
3-1/2"	SOHWTC 350
4"	SOHWTC 400



Slide on coupling with 5 female threads receive conduit or connectors and 10 male threads for two lock nuts and a ground bushing also available.

- One ³/₈ inch Hex Head Bolt at bottom position for size ½ thru 2 inch Two bolts at a 45° angle for sizes 2½ thru 5 inch
- Bolts can be specifically located at any point to allow greater flexibility

Safer Installation – Save Hours Difficult Jobs are Done in Minutes

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE


730 Pratt Boulevard • Elk Grove Village, IL 60007 P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595 E: info@spproducts.com • www.spproducts.com

IP22


Original Cinch Clamp MADE IN USA **Since 1973 (1)**



- Installed quickly (50% labor savings)
- Competitively Priced
- · High strength/heavy duty hot-dipped
- 10-gauge galvanized steel wire.

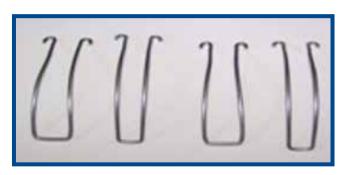

- Only Blade Screwdriver Needed
- Use with all strut type channel
- Securely fits EMT, Rigid, IMC, PVC and pipe
- Also available in stainless steel
- Sizes 1/2 thru 4 inch

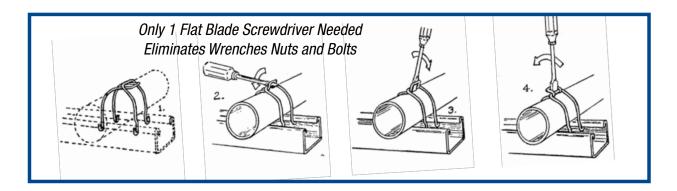

	Original Cinch Load Ratings					
		Cinch Clamp E-100 Electrical Metallic Tubing (EMT)	Cinch Clamp P-200, SS-300 Rigid Metal Conduit (RMC) Intermediate Metal Conduit (IMC)		Cinch Clamp P-200, SS-300 Rigid PVC Conduit	
Trade Size	Metric Designator	LOAD RATING (lb) Horizontal (Alternate Nomenclature)	LOAD RATING (lb) Horizontal P-200 (Alternate Nomenclature)	LOAD RATING (lb) Horizontal SS-300 (Alternate Nomenclature)	LOAD RATING (lb) Horizontal P-200 (Alternate Nomenclature)	LOAD RATING (lb) Horizontal SS-300 (Alternate Nomenclature)
1/2"	(16)	333(E-12)	333(P-12)	333(P-12)	333(P-12)	333(P-12)
3/4"	(21)	100(E-34)	333(P-34)	333(P-34)	333(P-34)	333(P-34)
1"	(27)	333(E-100)	100(P-100)	333(P-100)	100(P-100)	333(P-100)
1-1/4"	(35)	333(E-114)	333(P-114)	333(P-114)	333(P-114)	333(P-114)
1-1/2"	(41)	333(E-112)	100(P-112)	333(P-112)	100(P-112)	333(P-112)
2"	(53)	333(E-200)	100(P-200)	333(P-200)	100(P-200)	333(P-200)
2-1/2"	(63)		333(P-212)	333(P-212)	333(P-212)	333(P-212)
3"	(78)		333(P-300)	333(P-300)	333(P-300)	333(P-300)
3-1/2"	(91)		333(P-312)	333(P-312)	333(P-312)	333(P-312)
4"	(103)		333(P-400)	333(P-400)	333(P-400)	333(P-400)
	Horizontal support intervals are limited to 3.05 m (10 ft) maximum. Suitable for use in plenums.					
	INTENDED MOUNTING ORIENTATION - HORIZONTAL					

Catalog #	Size	EMT OD	PIPE OD	Load	Load SS*
CC-50	1/2"	.706	.840	333 lbs	333 lbs
CC-75	3⁄4"	.922	1.050	100 lbs	333 lbs
CC-100	1"	1.163	1.315	333 lbs	100 lbs
CC-125	1¼"	1.510	1.660	333 lbs	333 lbs
CC-150	1½"	1.740	1.900	333 lbs	100 lbs
CC-200	2"	2.197	2.375	333 lbs	100 lbs
CC-250	2½"	NA	2.875	NA	333 lbs
CC-300	3"	NA	3.500	NA	333 lbs
CC-350	3½"	NA	4.000	NA	333 lbs
CC-400	4"	NA	4.500	NA	333 lbs

*SS = Stainless Steel

Quick Application Saves Time and Money!

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

Box Support Bracket for **SECTION** Fire Alarm, Speakers, Strobes, etc.

8 Inches on Center (as shown)
12 Inches on Center (available upon request)



Accepts

3¾" Square X 3¾" Deep, 4" Square X 2½" Deep AND 4" Square X 3¾" Deep Boxes.

Ideal for installing in one or two layers of drywall or when adding paneling.

CAT#
FAB-350 16" thru 24" thru Stud Spacing

16 Gauge Galvanized or Stainless Steel

 Wide Flanges allow supporting boxes in from 15 thru 25 inches stud span.

• Strong 16 gauge galvanized or stainless steel will not bend or bow during installation.

 Quantity discounts and LABOR ONLY ORDERS with wiring assemblies installed (customer supplies material other than SP propriety items) available for greater savings. Save More
Than 30 MINUTES
with a Perfect
Installation
Every Time!



Box Available as a Separate Item

Also available with or without 1 piece 3-1/2" deep red painted boxes

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE


Original "Big O"



Indented Box Support Bracket

Mount Boxes and Move Them to Any Location Between Studs

Save More
Than 30 MINUTES
with Perfectly Level
Installation

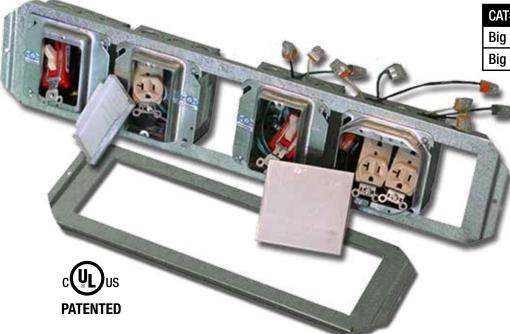


CAT#	BIG "0"	Qty/Box	Wt.
Big 0-16	16" Stud Spacing	50	22 lbs
Big 0-24	24" Stud Spacing	50	33 lbs

20 Gauge Galvanized or Stainless Steel

- Built in ruler top and bottom flange marked every ¼ inch allows fast, accurate bench loading
- Mount 4 or 4-11/16" square shallow or deep boxes at any location just loosen two screws to quickly relocate boxes without removing them
- Strong 20 gauge galvanized
- Brackets available with wiring device assemblies attached if components are not specified manufacturers' equals will be supplied.

Mud Ring Sandwiches Box to Bracket

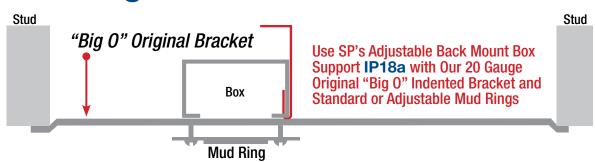

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE




"Big O" Flat



Box Support Bracket for Stud Walls

Flat version allows bracket to be slid left or right over face of studs for adjustment if necessary and installed with only 1 screw at each end plus enables boxes to be slid left or right to any location between studs.

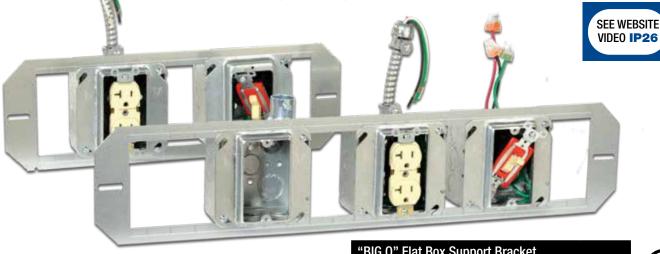

Extra strong 16 gauge galvanized or stainless steel to avoid bending or bowing during installation.

16 Gauge Galvanized or Stainless Steel				
CAT# Description Qty/Box Wei				
Big 0-16F	16" Stud Spacing	50	22 lbs.	
Big 0-24F 24" Stud Spacing		50	35 lbs.	



- Extra strong 16 gauge galvanized or stainless steel to avoid bending or bowing during installation.
- Install **4", 4** 11/**16" and 5"** square boxes, then quickly slide left or right to any location be-

tween studs.

• Completely flat with NO ¼" returns on top an bottom of entire width or 3/16" deep offsets at each end.

Mud Ring Sandwiches Box to Bracket

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

Dual Wall Box Support

Install Only 1

vs 2 Supports



Save More Than 30 MINUTES with a Perfect Installation **Every Time!**

Slots at each end allows bracket to be slid left or right over face of studs for adjustment and allows installation with only 1 screw at each end

Suitable for 1-1/2" Deep Boxes


Cat# DSBSWB-24 24" Stud Spacing

supports 2 boxes facing opposite directions on each side of a common wall.


Cat# DSBSWB-16 | 16" Stud Spacing

supports 2 boxes on one wall and one in the next room

16 Gauge Galvanized or Stainless Steel

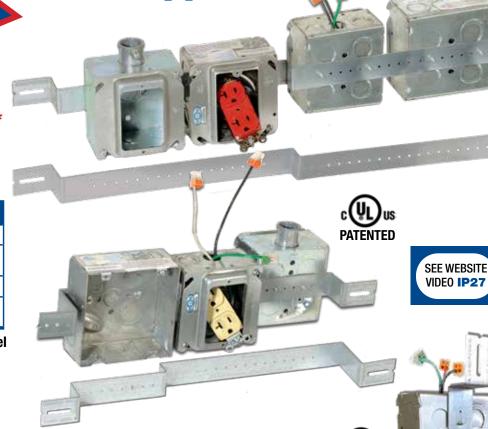





- Holes every ½" on center to secure boxes at any location between studs.
- 16 Gauge galvanized or stainless steel



Also Supports Boxes Vertically UL Listed as a Complete

Assembly Provided all Components are UL Listed



Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED





Box Support Wall Bracket



Slide bracket left or right over studs for adjustment and allows installation with only 1 screw at each end

16 Gauge Galvanized or Stainless Steel



Supports 4", $4^{11}/_{16}$ " & 5" Square Boxes

Suitable for 1-1/2" Deep Boxes				
Cat# CWB-16-178	16" Stud Spacing -1-1/2" Depth			
Cat# CWB-24-178	24" Stud Spacing -1-1/2" Depth			
Suitable for 2-1/8" Deep Boxes				
Cat# CWB-16-218	16" Stud Spacing -1-1/8" Depth			
Cat# CWB-24-218	16" Stud Spacing -1-1/8" Depth			
Suitable for 3-1/2" Deep Boxes				
Cat# CWB-16-278	16" Stud Spacing -3-1/2" Depth			
Cat# CWB-24-278	24" Stud Spacing -3-1/2" Depth			

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007

IP27a

Electro Post EP-10Box Support Bracket




Mounts on all standard stud widths of 2-1/2", 3-5/8", or 6"

MOUNTING INSTRUCTIONS

Step 1

Fold bracket to form square tube post and secure by inserting tabs into slots.

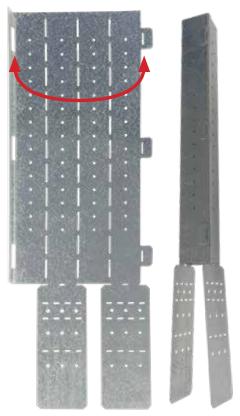





Use with J-Hooks to support low voltage wire runs. Supports up to 16.5 lbs



Step 2

Fold bracket mounting flanges to accommodate wall stud width (2¹/₂", 3⁵/₈", or 6").

Step 3

Attach box(es) to either side of EP-10 with standard fasteners.

Step 4

Bracket can be loaded with 4", 411/16", square boxes and assembled with boxes and mud rings as required prior to installation (on stud) in prefab shop or on site.

Step 5

Bracket fastened to intended top plate wall stud directly above a vertical stud with (3) #10-16 min 5/8" long Tek screws on each side of bracket to meet UL listing requirements prior to installation of drywall

- Provides uniform height directly above T-Grid Ceiling.
- Reduces electricians working at higher heights on large ladders.
- Easy accessibility thru ceiling to electrical boxes after completion.
- Product ships flat for shipping ease, 50 pcs. per box/20 lbs.
- Made from 24 gauge galvanized or stainless steel.
- Post folds for installation without use of tools.
- Mount electrical boxes to any side of post.

CAT#	BOX SUPPORT BRACKET
EP-10	2-1/2", 3-5/8" & 6" Studs

24 Gauge Galvanized or Stainless Steel (50 pcs. per box) 20 lbs

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED





MADE NUSA Conduit Plug and ID Tag with Hole for Pull String

Protect and Identify Conduit Runs



Prevents mistakes


No debris enters conduit

 Tab allows changing detailed ID several times

 Accommodates three conduit sizes per plug

 Strong, long lasting, and reusable

 Highly visible bright orange only

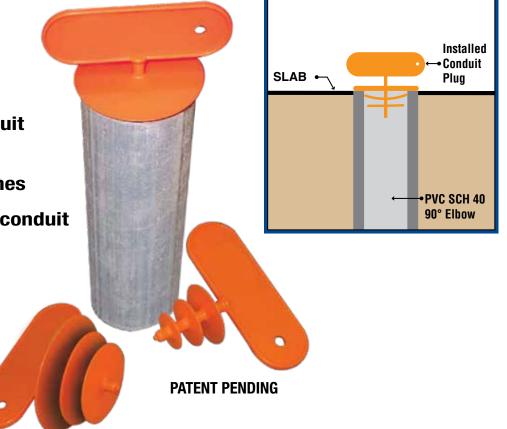

CAT #	SIZE
CP50-75-100	½", ¾", 1 "
CP125-150-200	11/4", 11/2", 2"

Eliminate Problems Plus Save Time and Material on Jobs

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED




LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

Flat Fixed Position 1 Box Support Bracket



Tear drop shaped mounting holes allow fast & perfect installation of boxes without removing box screws.

Flat version allows bracket to be slid left or right over face of studs for adjustment and allows installation with only 1 screw at each end

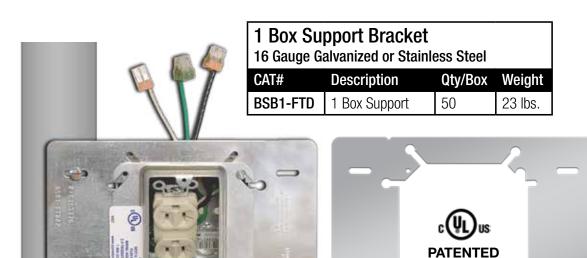

Openings allow installation of 4", 4¹¹/₁₆" & 5" square boxes or adjustable mud rings

Brackets work with regular

MOUNTING INSTRUCTIONS



- **Step 1** Align bracket center line to the stud height location required.
- **Step 2** Apply #8 self tapping screw pan head or Phillips thru slots to secure to stud.
- Step 3 Bracket can be loaded with 4", 4-11/16" and 5" square boxes and preassembled with boxes and mud rings required prior to installlation (on stud) in prefab shop or on site.

Available With or Without Adjustable Mud Rings

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



Flat Fixed Position 2 Box Support Bracket




Tear drop shaped mounting holes allow fast & perfect installation of boxes without removing box screws.

Flat version allows bracket to be slid left or right over face of studs for adjustment and allows installation with only 1 screw at each end

2 Box Support Bracket 16 Gauge Galvanized or Stainless Steel

CAT#	Description	Qty/Box	Weight
BSB2-FTD	2 Box Support	50	49 lbs.

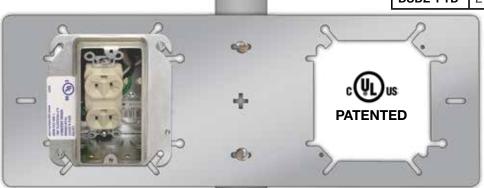

Mount boxes on both sides of stud...



...Or mount boxes on studs 16" – 8" on center



Openings allow installation of 4", 411/16" & 5" square boxes

Brackets work with regular or adjustable mud rings

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED




LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

Flat Fixed Position **3 Box Support Bracket**




Tear drop shaped mounting holes allow fast & perfect installation of boxes without removing box screws.

Flat version allows bracket to be slid left or right over face of studs for adjustment and allows installation with only 1 screw at each end

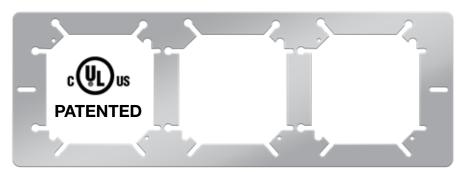



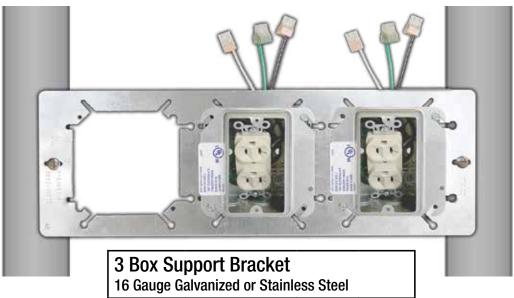

Openings allow installation of 4", 4¹¹/₁₆" & 5" square boxes

CAT#

BSB3-FTD

Brackets work with regular or adjustable mud rings

Weight

34 lbs.

Customer must satisfy all codes and owners' specifications.





Description

3 Box Support

16" Stud Spacing



Qty/Box

50





Flat Fixed Position 4 Box Support Bracket



Tear drop shaped mounting holes allow fast & perfect installation of boxes without removing box screws.


Flat version allows bracket to be slid left or right over face of studs for adjustment and allows installation with only 1 screw at each end



4 Box Support Bracket
16 Gauge Galvanized or Stainless Steel

CAT#	Description	Qty/Box	Weight
BSB4-FTD	4 Box Support	25	29 lbs.
	24" Stud Spacing		



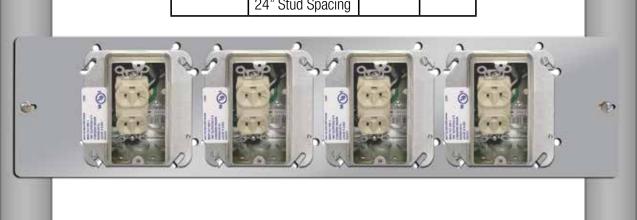

Openings allow installation of 4", 411/16" & 5" square boxes

Brackets work with regular or adjustable mud rings

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



Custom Mounting Plates





Allow fast perfectly located down lights, boxes or other highly repetitive applications above vanities, desks, etc.

Attach to wall, Hard Lid or T Bar ceilings & quickly drop-boxes, fixtures, etc. in later.

Avoid time consuming repetitive measurements for each installation.

Galvanized Steel



Boxes, mounting bolts, etc. welded to plate to prevent unauthorized access in high security areas:

- Prisons
- Hospitals
- Courthouses



Post Light Base 3/4 inch thick stainless steel

Ganged Boxes

- · Eliminate costly time consuming measuring and possible mistakes
- All plates have rounded corners for safer handling and installation.
- Any configuration & gauge galvanized or stainless steel with any size mounting holes, slots, etc at specified locations Available on special order.

Excellent Quality at Competitive Prices Tell Us What You Need -We'll Make It!

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

Slicknut



Bushing Adapters for Pulling & Grounding Wire

IP30a

THREADED GROUND BUSHING

Threaded Ground Bushing
CAT# TGB 50-400 Series



Sizes 1/2 thru 4 inch

(Standard Qwik Nut includes 1 Lug)

Must install 3 Lugs for UL Listing,
extra lugs sold separately.

Consult Factory for prices and availability

IP30b

THREADLESS GROUND BUSHING

Threaded Ground Bushing CAT# NTGB 50-400 Series



Rounded edge prevents damage to wire during pulls
Threadless versions for use with heavy wall and thin wall conduit
3 Holes 120° on centers to receive tapped lugs

Threaded Ground Bushing CAT# NTGB 50-400 Series



SLICKNUT SOCKET TOOL

Socket to securely install Slicknut bushings



Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

Slicknut



Bushing Adapters for Pulling Wire

IP31a

THREADED PULL BUSHING

Threaded Ground Bushing
CAT# TPB 50-400 Series





(Standard Qwik Nut includes 1 Lug)
Must install 3 Lugs for UL Listing,
extra lugs sold separately.
Consult Factory for prices and availability

IP31b

THREADLESS PULL BUSHING

Threaded Ground Bushing
CAT# NTPB 50-400 Series



Rounded edge prevents damage to wire during pulls
Saves time when pulling branch & feeder wire
Serrated edge on under side of bushing serve as locknut
Split plastic bushing also serves as locknut
Install one with every connector

Threaded Ground Bushing
CAT# NTGB 50-400 Series



SLICKNUT SOCKET TOOL



Socket to securely install Slicknut bushings

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



EZ Hangers in T Bar Ceilings



For Down Lites, Speakers, Exit Signs, etc.






CAT# BOX SUPPORT BRACKET

2B1 2 Foot (24" on Center) T Bar
Sold in Pairs

4B1 4 Foot (48" on Center) T Baar
Sold in Pairs

- Extremely strong 22 gauge galvanized steel with a 50 lb load rating.
- No extra parts to drop or lose.
- 2 mounting holes each 1-½ inch from center mark to quickly mount speakers or other devices in center of tile plus one at each end for supporting to structure independently of T Bar per IFFX Luminaire Fittings Standard.







- Bend out tabs on ends of hangers
- Bend tabs in to lock in place
- Slide hangers with box or fixture housing attached along T Bar
- Slide fixture housing, boxes, etc. in other direction along hangers to location required

Eliminate Labor Intensive Cutting & Tieing Down Lathers Channel, Black Iron, Conduit, etc.

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

Plain Mounting Brackets for T Bar Ceilings MADE IN USA



Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

Vertical, Ceiling Adjustable MADE IN USA **Bar Hanger Assembly**





Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007 P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595 E: info@spproducts.com • www.spproducts.com

IP34

Custom Engraved



Nameplates & Labels

For Electrical and Mechanical Identification



- Extensive experience labeling complex redundant base building systems in data centers (tenant labels for PDUs, FDCs, RPPs, cabinet rows, server racks, power strips) and hospitals.
- Laser engraved stainless steel, aluminum and plastic signs with vinyl lettering also available.

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED






Also Available with larious Lengths of **Galvanized Steel Strut Attached**

Roof Top Blox Roof Conduit Support Safer, Lighter and Faster!

EXTREMELY COMPETITIVE PRICING

Eliminates cutting and hauling, expensive treated lumber or heavy rubberized supports up to roof.

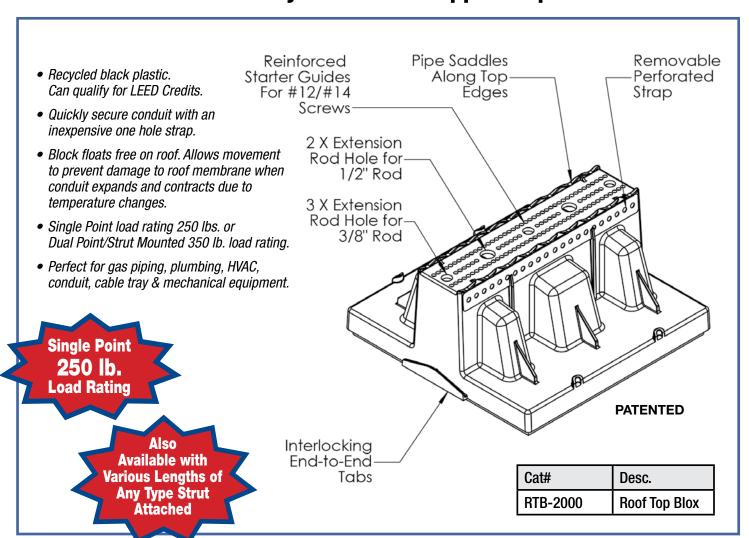

For Electrical, Plumbing, HVAC, etc.







PATENT PENDING PATENTED



Cable Ties



A wide variety of head types, sizes and lengths.





Many different colors to choose from.



Available Colors		
0 - Black	7 - Purple	
1 - Brown	8 - Gray	
2 - Red	9 - Natural	
3 - Orange	11 - Flourscent Green	
4 - Yellow	14 - Flourscent Orange	
5 - Green	15 - Flourscent Blue	
6 - Blue	18 - Pink	

Standard Ties - 100 q	Standard Ties - 100 qty.			
Catalog #	Description			
SP-04-18-0-C	4" 18lb UV Black Mini Cable Tie			
SP-04-18-9-C	4" 18lb Natural Mini Cable Tie			
SP-08-40-0-C	8" 40lb UV Black Intermediate Cable Tie			
SP-08-40-9-C	8" 40lb Natural Intermediate Cable Tie			
SP-07-50-0-C	7" 50lb UV Black Standard Cable Tie			
SP-07-50-9-C	7" 50lb Natural Standard Cable Tie			
SP-11-50-0-C	11" 50lb UV Black Standard Cable Tie			
SP-11-50-9-C	11" 50lb Natural Cable Tie			
SP-14-50-0-C	14" 50lb UV Black Standard Cable Tie			
SP-14-50-9-C	14" 50lb Natural Standard Cable Tie			
SP-14-120-0-C	14" 120lb UV Black Heavy Duty Cable Tie			
SP-14-120-9-C	14" 120lb Natural Heavy Duty Cable Tie			
Heavy Duty Ties - 50	Qty.			
SP-36-175-0-L	36" 175lb UV Black Heavy Duty Cable Tie			
SP-36-175-9-L	36" 175lb Natural Heavy Duty Cable Tie			
SP-48-175-0-L	48" 175lb UV Black Heavy Duty Cable Tie			
SP-48-175-8-L	48" 175lb Gray Heavy Duty Cable Tie			
SP-48-175-9-L	48" 175lb Natural Heavy Duty Cable Tie			
Mounting Hole Ties -	100 Qty.			
SP-7-50-MH-9-C	7" 50lb Natural Mounting Hole Tie			
SP-14-50-MH-9-C	14" 50lb Natural Mounting Hole Tie			
Mounting Bases				
SP-MP-750-0-C	3/4" Rubber Base Black Mounting Bases			
SP-MP-750-9-C	3/4" Rubber Base Natural Mounting Bases			
SP-MP-1000-0-C	1" Rubber Base Black Mounting Bases			
SP-MP-1000-9-C	1" Rubber Base Natural Mounting Bases			





E: info@spproducts.com • www.spproducts.com






PATENT PENDING PATENTED



Prefab Assemblies



for Data Power Distribution Units

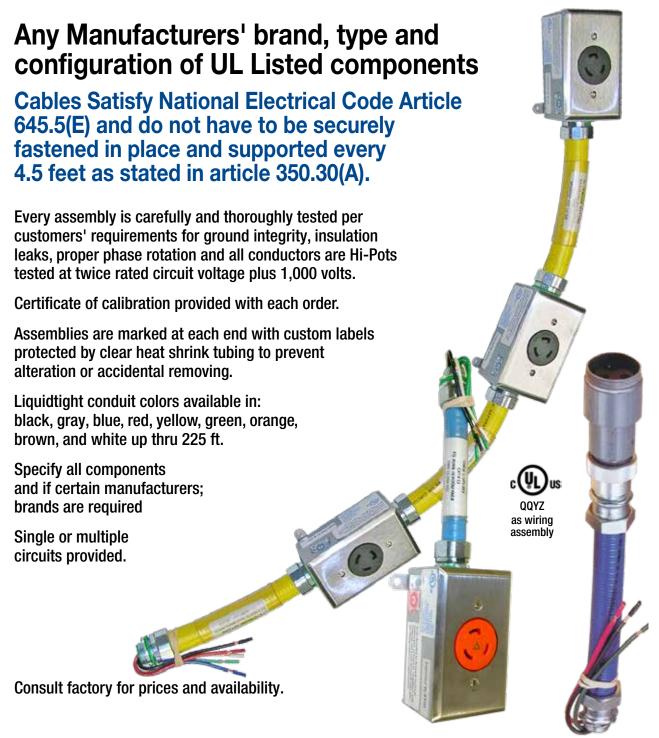

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED






Prefab Assemblies



Let SP be Your Prefab Shop with NO INVESTMENT on Every Day Jobs Throughout the Year

PLUS...Compete Aggressively and Win Larger Jobs with More Profit

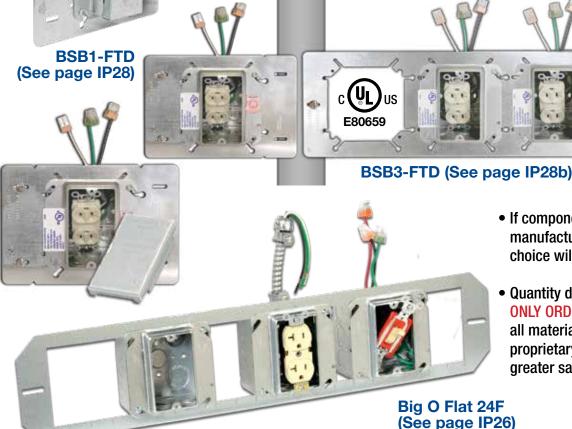

- If components are not specified, manufacturers equals of our choice will be supplied
- Quantity discounts and LABOR ONLY ORDERS (customer supplies all material other than SP proprietary items) available for greater savings

PLUS An Unlimited Variety of Other Applications



Assemblies available with 1 or 2 gang Strong Steel Snap On/Off Protective Covers



PATENTED E185948

Protective Covers also sold separately (see pg TE-1)

All units carefully inspected, marked and packed to guarantee quality plus minimize handling in the shop or field.

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED





Prefab Assemblies



Let SP be Your Prefab Shop with NO INVESTMENT on Every Day Jobs Throughout the Year PLUS...Compete Aggressively and Win Larger Jobs with More Profit







Later during the job when correct whip lengths are known, connect whip leads to device leads extending out of box with Wago type push-on or live spring wire nuts and feed all wires through open KO back into box until whip is attached to box with a snap on connector attached on its end.

20 Amp - CRB5362 Cat# MC PF 1-R

Protective Covers
Available Separately
1 GANG = SOC-1G
2 GANG = SOC-2G
(see pg TE-1)

...OR EMT Conduit

- 1. Run conduit to correct KO location in box.
- 2. Drop mud ring with device that is firmly attached to green ground screw in box.
- 3. Feed wires through conduit and connect them to device leads with Wago type push-on or live spring wire nuts.
- 4. Install mud ring with device back onto box.

Above assembly includes the following components

- 1- 4 square 1/2" 3/4" KO x 2 1/8 deep box
- 1- 1 gang x 5/8" raised mud ring
- 1- 20 A specification grade CRB5362 back & side wired device tucked in or attached to mud ring
- 1- Single box support 16 gauge BSB1-FTD (IP28)

- 1- #12 stranded 8 inch pigtail grounded to box
- 3- #12 THNN stranded 8" long any color wire leads each with Wago push on quick connector or live spring wire nuts attached.
- 1- One or two gang protective cover (shown above) attached to mud ring.

Also Available without wiring devices and with any Type, Combination and Manufacturers Brand Components. If not Specified SP will Supply Equals.

Labor only orders also negotiated

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

Adjustable Depth Mud Rings for 4 Square Outlet Boxes





1 Gang

Meets UL514 & CSA C22.2 No. 18.1

Prevent Costly Depth Problems SAVE a Great Amount of Time

Cat# 1GADJMR-58-125 Cat# 1GADJMR-75-150



Cat# 2GADJMR - 2 Gang



Adjusting screws NOT covered by drywall.

Eliminates lost time and damage to drywall when chipping out to expose adjusting screws.



Cat# 3GADJMR - 3 Gang



Provides complete flexibility to quickly allow perfect alignment of devices

Customer must satisfy all codes and owners' specifications.







PATENT PENDING PATENTED



PFA4

Grounding Pigtails All Colors and Versions Available



Set Screw #12 THHN x 8"

Solid Cat# 12SOL-8-SC Stranded Cat# 12STR-8-SC

Ring #12 THHN x 8"

One End Stripped #12 THHN x 8"

Solid Cat# 12SOL-8-1ES Stranded Cat# 12STR-8-1ES

Both Ends Stripped #12 THHN x 8"

Stranded Cat# 12STR-8-RT



Solid Cat# 12SOL-8-2ES Stranded Cat# 12STR-8-2ES

Fork/Spade #12 THHN x 8"

Stranded Cat# 12STR-8-FT

Ring End/Push On #12 THHN x 8"



Stranded Cat# 12STR-8-WA-RT

Custom Wire Leads



Green Ground Set Screw



Push On Type UL Listed for 600 volt - 20 amp



Ring Terminal



Spade or Fork **Terminal**

(insulated or uninsulated)

An unlimited variety of configurations with or without any type of above connectors, terminals, etc. attached at one or both ends, and in any type insulation, size, length, color, plain, or striped etc., solid or stranded wire are available. Consult Factory.

Excellent quality with fast delivery at extremely competitive prices

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED





MADE IN USA Snap On/Off


Adjustable and Reusable Protective Covers

SAVE a great amount of time and money on all outlets for jobs throughout the year!

Description	Catalog #
1-Gang	S0C-1G
2-Gang	S0C-2G
3-Gang	SOC-3G







- Covers suitable for all manufacturers' brands including adjustable mud rings.
- Device cover is used for protection of wiring devices prior to energizing circuit.



1-Gang = SOC-1G **PATENTED**



2-Gang = SOC-2G PATENTED



Also suitable when wire devices are connected to leads and tucked into back of deep boxes

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED








MADE IN USA Rigid Pipe Joiner

Spins 10 Foot Lengths Together in Under 10 Seconds with Less Chance of Injury

Catalog #	Size
PS125	11/4"
PS150	11/2"
PS200	2"
PS250	21/2"
PS300	3"
PS350	3½"
PS400	4"
PS500	5″
PS600	6"

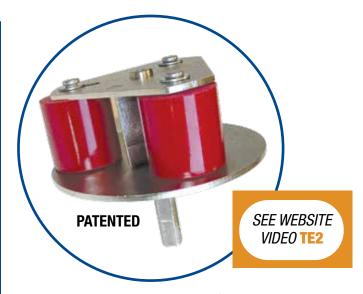

- When shaft turns, grips expand to lock on inside of conduit and spin it 360° to join the entire 10 foot length into the preceding coupling. Drill can be reversed to disconnect conduit.
- Eliminates labor intensive ropes or chain and heavy hard to handle strap wrenches.
- Spinners available in sets at reduced prices or sold separately.

WHEN USING CUTTING OIL. REMOVE WITH A PROPER SOLUTION. DO NOT INSERT ANY FOREIGN MATERIALS IN AN ATTEMPT TO PREVENT SLIPPAGE.



Prevents Damage to Inside and Outside of Conduit - Especially PVC Coated

Customer must satisfy all codes and owners' specifications.










PATENT PENDING PATENTED




LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE


Poly Foam Box Insert MADE IN USA



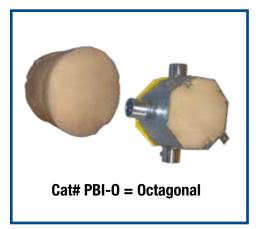



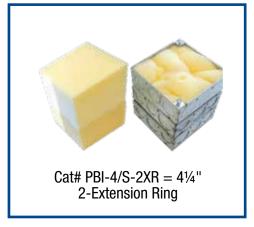








- Prevents Concrete from **Entering Boxes**
- Fast and Easy to Install
- Reusable for 8 or more applications



- Saves Over 5 Minutes, **Plus Cost of Tape**
- For All Types of Boxes on **Poured in Place Concrete Jobs**

Traditional Method of Taping Box to Keep Out Concrete During Pour

Available in a Wide Variety of Other Configurations Consult Factory for more Information

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED







PATENT PENDING

Cut'N'Catch NEW!



Only 1 worker needed to cut any type conduit, strut, threaded rod up thru 6" size



- Portable, use anytime, anywhere on job sites & prefab shops
- Ideal for all trades: Electricians. Plumbers, HVAC, Carpenters, etc.
- Accommodates any length of conduit, strut, threaded rod, etc.
- "Claws" secure bandsaw and protect from expensive damage by falling
- · Allows for a cleaner cut and eliminates burrs - NO FILING required
- Securely clamps any length material safely in place for cutting
- Catches cutoff in V-Glides to keep pieces off the ground

Eliminates the dangerous "Captain Morgan" method! **BOTH** hands remain free to operate bandsaw.

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED




LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

SCH 40 & 80

PVC Reaming Bits

for Transition Couplings



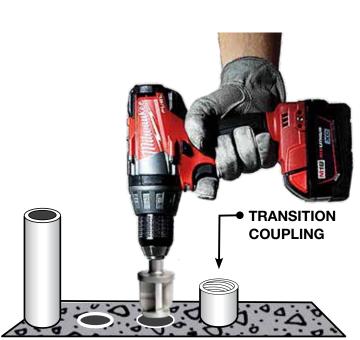

1-Piece
Larger sizesavailable
on special order

PATENT PENDING

High Quality Steel Sharpenable for Long Life

PVC Conduit Size	SCH 40 PVC Catalog #	PVC Conduit Size	SCH 40 PVC Catalog #
1/2″	IPRB50-SCH 40	2½″	IPRB250-SCH 40
3⁄4″	IPRB75-SCH 40	3″	IPRB300-SCH 40
1″	IPRB100-SCH 40	3½″	IPRB350-SCH 40
11/4″	IPRB125-SCH 40	4″	IPRB400-SCH 40
1½″	IPRB150-SCH 40	5"	IPRB500-SCH 40
2″	IPRB200-SCH 40	6"	IPBR600-SCH 40

PVC Conduit Size	SCH 80 PVC Catalog #	PVC Conduit Size	SCH 80 PVC Catalog #
1/2″	IPRB50-SCH 80	2½″	IPRB250-SCH 80
3⁄4″	IPRB75-SCH 80	3″	IPRB300-SCH 80
1″	IPRB100-SCH 80	3½″	IPRB350-SCH 80
1¼″	IPRB125-SCH 80	4″	IPRB400-SCH 80
1½″	IPRB150-SCH 80	5"	IPRB500-SCH 80
2″	IPRB200-SCH 80	6"	IPBR600-SCH 80

1/2" & 4" = 1/2" Chuck

5" & 6" = 3/4" Chuck

NO PARTS TO LOSE ON THE JOB SITE!

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED




Live Panel Lockout Brackets



Extremely Safe – Save Time Everyday



Locks & keys for brackets sold separately. Consult Factory for additional cost.

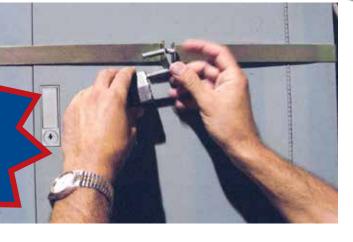

- On/Off in seconds
- Lock it to Eliminate entry by unauthorized personnel
- Brackets sold in pairs

- Locks and keys sold separately
- Two holes provided on each piece for two locks
- Strong 18 gauge zinc plated steel, reusable with long life

Common Sizes

LOB 20" wide panel

LOB 36" wide panel

LOB 40" wide panel

An unlimited variety of other panel widths available.

FOR USE AS AN ACCESS DETERRENT — NOT FOR PROTECTION AGAINST ELECTRICAL SHOCK!

Customer must satisfy all codes and owners' specifications.

E: info@spproducts.com • www.spproducts.com









PATENT PENDING PATENTED







Live Panel Temporary Covers



Provide Protection for Construction Workers, Visitors, and Tenants



20" X 48" Cat# TPC 20 X 48 14" X 48" Cat# TPC 14 X 48 Other sizes available on special order

ON/OFF in Seconds Highly Visible – Improves Image on Jobsite

Non-Conductive Magnets Securely Fastens Cover to Panel

Panels available with pre-drilled holes for nuts, bolts and washers to securely attach panel. Customer must specify size and exact locations required. Covers also available with nuts, bolt and washers installed.

ANSI Z535.1, ANSI Z535.2, ANSI Z535.3, ANSI Z535.4, ANSI Z535.5, ANSI Z535.6

For Use as an Access Deterrent – Not For Protection Against Electrical Shock!

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



Portable Cable Pullers for Power, Data, etc. in Light Poles



- Quickly Attach to Hand Hole of Each and Pull Wire All While Standing Ground to Reduce Chance of Injury
- Use in Sets of Two
- Eliminate Damage to Poles and Wire
- Extremely Safer and Faster



2 Electricians Walked from Pole to Pole and Pulled Over 52,000 Feet of #4 Cable in One Day or Only 16 Total Hours!

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED




Anchor Bolt Templates



Extremely Fast, Accurate Installation For Light Poles, Beams, etc.







A 1/4" hole can be provided on end of each wing upon request for fast and secure insallation of the template to sonotube before the concrete pour

- Rulers on all 4 wings allow drilling same bolt diameter holes for 5½ thru 25 inch four bolt circle patterns.
- Color code templates for each bolt diameter and drill different circle patterns from job to job.
- Embedded divots ensure accuracy when drilling.
- Deep recess in back allows leveling nut to be free of concrete.
- Strong extremely long-lasting non-corrosive ABS plastic.

Eliminate constantly purchasing and fabricating expensive plywood.

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



PVC Conduit BenderPortable – No Power Needed!



Use Anytime – Anywhere – On Job Site Eliminates expensive Hot Boxes, Heat Blankets, Generators, etc. Up Thru 6 Inch Schedule 40 & 80



ONE FREE Bender Supplied for every \$100,000 of Qwik Duct Templates, End Bells and/or Transition Couplings ordered. Orders can be asssorted and accumulated for a maximum period of 12 months from date of first order. If Bender's are not available and customer achieves above goal he will receive a 2% credit on Template, End Bell and/or Transition Couplings purchases during the period. Customer must accept this offer with a dated signed agreement.

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

Dry Wall Cut Out Templates



Allow Fast, Perfectly Spaced and Level Cut Outs with NO DAMAGE to Drywall


Cat# COT100
PATENTED





- Two levels provided for perfect horizontal and vertical alignment
- Center lines provided for accuracy especially when ganging cut outs
- Clear see thru blue polycarbonate material

Allows tracing all box and screw openings.





Extremely Strong and Durable, Save Hundreds of Dollars Every Year

Customer must satisfy all codes and owners' specifications.









PATENT PENDING PATENTED





PVC Driver for Joining SCH 40/80 **PVC Conduit**

See Our CHUCK ADAPTERS from 3/4" to 1/2" See page IP15

Assemble PVC conduits in a Duct Bank on a job site or prefab using the PVC Driver with a Hammer Drill to join 2 pieces of PVC conduit in a matter of seconds.

> PVC Driver eliminates extra tools and allows for a clean and safe installation with less labor.

Insert PVC Driver into Hammer Drill and drive PVC Conduit into place with this light weight aluminum tool for

SAFER, BETTER, FASTER jobs.

1-Piece Aluminum **Construction**

5", 6" & 8" = 3/4" Chuck 1" thru 4" = 1/2" Chuck







P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595 E: info@spproducts.com • www.spproducts.com





PATENT PENDING PATENTED

1-1/2"

1-1/4"



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007

EMT Conduit Lavout This I Syste

for perfectly spacing panel knock-outs

This NEW EMT Conduit Knock-Out System makes layout simple and fast with consistent professional looking results every time!

Available in sizes 1/2" up to 4" EMT OR 2" and above for RGD.

For both 7/8" and 1-5/8" strut heights.

PATENTED



Step 1: Measure




Step 2: Mark



Step 3: Drill



Step 4: Install

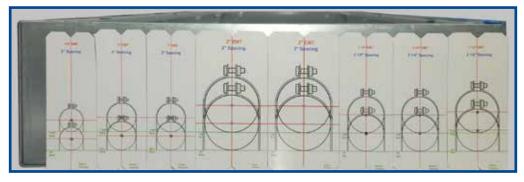

The pre-measured magnetic templates hold their position, enabling easy layout of all conduits, on J-Boxes, Panels or Cabinets.

Catalog #	EMT Size	RGD Size	Desc.
CLT-50	1/2"	1/2"	4 Pcs.
CLT-75	3/4"	3/4"	4 Pcs.
CLT-100	1"	1"	4 Pcs.
CLT-125	1-1/4"	1-1/4"	4 Pcs.
CLT-150	1-1/2"	1-1/2"	4 Pcs.
CLT-200	2"	2"	2 Pcs.
CLT-250	2-1/2"	2-1/2"	2 Pcs.
CLT-300	3"	3"	2 Pcs.
CLT-350	3-1/2"	3-1/2"	2 Pcs.
CLT-400	4"	4"	2 Pcs.









PATENT PENDING PATENTED





Terms & Conditions

ALL PRICES ARE SUBJECT TO CHANGE WITHOUT NOTICE

- 1. Cash Discount 2% 10 Days, Net 30. F.O.B. Factory, Elk Grove Village, IL 60007
- 2. Freight allowed on \$3,500 or more of all products other than Duct Bank Templates, EZ Pull Wiring Harnesses, Econo Whips, and all types of Prefabricated Assemblies
- 3. Freight on Duct Bank Templates, EZ Pull Wiring Harnesses, all of Econo Whips, Prefabricated Assemblies is negotiated on an individual order basis. If freight requirements are met on orders for these products, any quantity of all other products shown on price sheet, may be Included to become freight allowed.
- 4. Terms apply on one shipment to one location within the continental USA. For Alaska, Hawaii, Puerto Rico and else where, consult factory.

- 5. 50% restocking charge plus freight charges both ways, on all products other than specials noted in paragraph 3 & 4 above provided material is in saleable condition based on our inspection. No returns accepted if purchase order is older than 1 year.
- 6. All types of wiring harnesses including harnesses in all types of flexible conduit, twisted or striped wire, Qwik Duct Custom Templates, prefabricated boxes with wiring devices installed and all other prefabricated products are absolutely not returnable.
- 7. Customer can order any piece quantity.









PATENT PENDING PATENTED



Are you a retired electrician with many years of experience...

All your projects around the house are completed?

Put your valuable knowledge to good use!
Sales territories available throughout the U.S.
including Hawaii and Alaska as well as Canada!
Earn an excellent income selling our high quality
made in USA innovative product line that saves
contractors a large amount of money.

Earn excellent compensation selling our innovative made in USA products to distributors and their customers in your area.

Do you have IDEA's for products that help Do SAFER BETTER FASTER jobs!

Call us we'll help patent, develop and if possible obtain a UL Listing, make it in the USA and pay YOU an excellent royalty on all sales!

Plus, you'll have the satisfaction of making a valuable contribution to our industry.









PATENT PENDING PATENTED





Buy American Act Letter of Compliance



BUY AMERICAN ACT - applies when the federal government is directly purchasing products or materials for a federal project that are designated as Domestic. Under this act there are two provisions to determine if a product is domestic: 1.) it must be "manufactured*" in the United States; and 2.) the cost of domestic components. (*The Government Accountability Office (GAO) define "manufactured" as the completion of the (end product) in the form required for use by the government to be carried out domestically.)

BUY AMERICAN ACT - requires Federal agencies to procure domestic materials and products. Two conditions must be present for the Buy American Act to apply: (1) the procurement must be intended for public use within the United States; and (2) the items to be procured or the materials from which they are manufactured must be present in the United States in sufficient and reasonably available commercial quantities of a satisfactory qualtiy.

SP Products, Inc. is committed to making it easy as possible to supply our productsfor proects subject to the Buy American Act requirements.

Currently all products listed in the current catalog* meet the requirements of each act.

* With the exception of PFA4 Adjustable Mud Rings are made in China.

SP Products, Inc. | 730 Pratt Blvd. | Elk Grove Village, IL 60007 info@spproducts.com | www.spproducts.com









PATENT PENDING PATENTED

