

# Flat Fixed Position 1 & 2 Box Support Bracket




**1 BOX**  
Cat# BSB-1FTD

PATENT PENDING  US

**Strong 16 gauge galvanized or stainless steel - no back box bracket required.**

**MOUNTING INSTRUCTIONS**  
**Step 1** Align bracket center line to the stud height location required.  
**Step 2** Apply #8 self tapping screw pan head or Phillips to secure to stud on slots above and below slotted cross.  
**Step 3** Bracket can be loaded with 4", 4-11/16" and 5" square boxes and preassembled with boxes and mud rings required prior to installation (on stud) in prefab shop or on site.

**Tear drop shaped mounting holes allow fast & perfect installation of boxes without removing box screws**

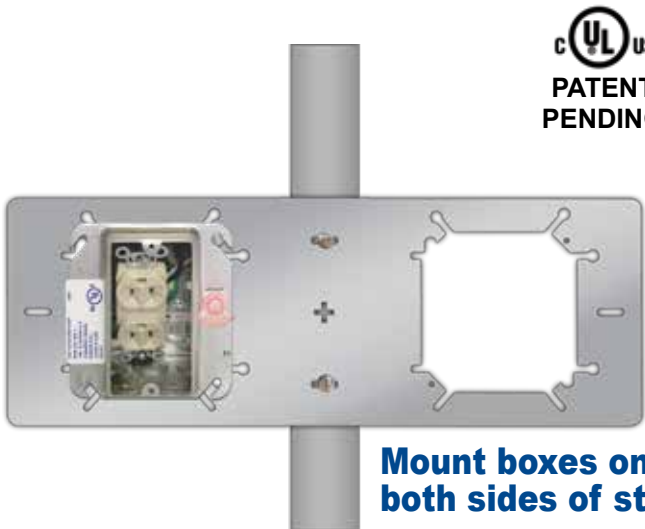

  
PATENT PENDING

**Mount boxes on both sides of stud**



**2 BOX**  
Cat# BSB-2FTD = 16" Stud Spacing

**Openings allow installation of 4", 4-11/16" & 5" square boxes and 4" Square Adjustable Mudrings**

**Mud Ring Sandwiches Box to Bracket**  
*Available with or without adjustable mud rings*

**Customer must satisfy all codes and owners' specifications.**



PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007  
 P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595  
 E: info@spproducts.com • www.spproducts.com

**IP28**