

#19

SP PRODUCTS, INC.

Productivity and value thru ideas
FOR SAFER BETTER FASTER JOBS

We're Proud to be the Electricians' Friend for Over 50 Years!

**NECA
2023 SHOW
STOPPER!**

IP10a

EZ STUB-UP

Join two EZ Stub-Ups with strut to support and secure multiple stub-ups on wooden forms before concrete pour for sizes 1/2", 3/4", 1" & 1-1/4" stub-ups with SP's Nylon Support Brackets and transition to RGB with our transition couplings.

IP1


Qwik Duct

Safer Better Faster

HDPE CUSTOM TEMPLATES
In Any Configuration Required



Patent Pending

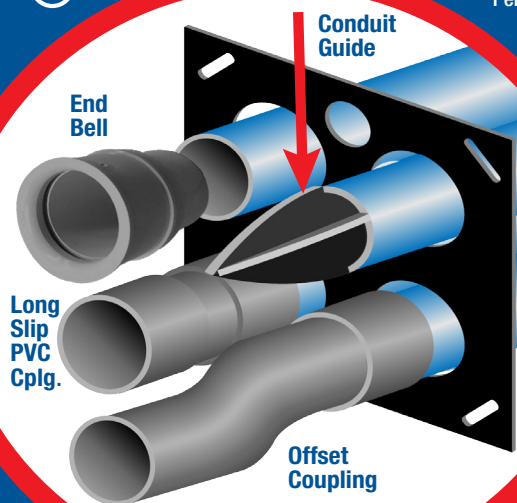

**IP3b
IP3c**

PVC Offset

Sizes 1/2" thru 6"
Meets Flexible
Madrel Test
Requirements


Patent Pending




Bore Spacers

Sizes 1/2" thru 6"
Roll assembled conduit
into caissons and under
obstructions

IP2a

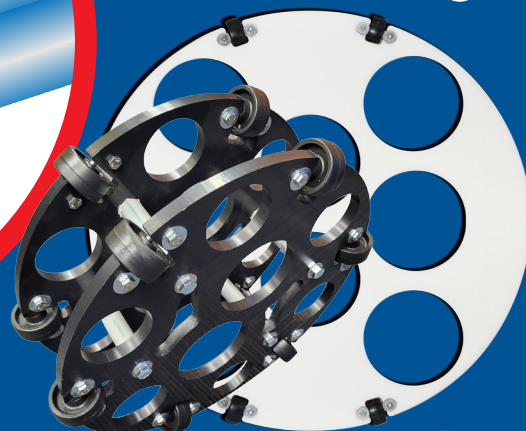

Transition
Couplings

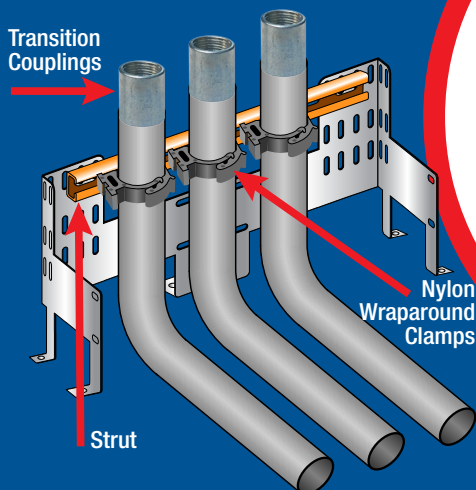

Conduit Transition Couplings

For transitions to any application above the slab

IP3a

**End Bell
Adapter**
Schedule
40/80 PVC



Patent Pending



IP13a-p

**TAPERED COUPLING
ADAPTERS**
REAMING
NECESSARY



Patented



IP12

SLIP COUPLINGS

NO REAMING NECESSARY
Glues into standard PVC



Patented



IP13r-u

**PVC BELL END
ADAPTERS**
NO REAMING
NECESSARY

Patent Pending



IP13v

**GALVANIZED RIGID
SELF THREADING
ADAPTER**
REAMING
NECESSARY

IP15

**1 Piece
Reaming Bit**
1/2" thru 6"
Schedule 40/80

Patent Pending



Plus More Being Invented for SAFER BETTER FASTER Jobs . . . Call With Your Ideas!

SPPProducts.com 800-233-8595 Info@SPPProducts.com

We began in 1966 based on more than just making a fair profit:

1. To care for our country, industry and electricians by encouraging everyone to buy and install quality Made in U.S.A. innovative products for...
SAFER – BETTER – FASTER jobs.
2. Provide opportunity with fair compensation for current and future generations in this country.
3. Develop and promote products that help accomplish these goals.
4. Be the electricians' friend by providing them the satisfaction of making a valuable contribution to the industry plus receiving fair compensation for their ideas.
5. Provide excellent quality and service with competitive pricing.

For more information, samples, literature, product meeting, quotation or to place an order call or email us. Also, if you have ideas for products we'll help you patent & market them plus pay you an excellent royalty.

info@SPProducts.com
800-233-8595

SP Products' philosophy and dedication to making valid contributions to the industry began with

“Econo Whips” 
Originated in 1966...



No Center Stop Coupling




Pre Fabricated Assemblies






...Our Whip Machine in 1969

- Any size, length, type – steel or aluminum flexible conduit, MC Cable, Liquidtite, Cord Romex, etc. with any type connectors attached
- Specify components required.
- Conductors stripped
- Locknuts secured rubber bands



...Plus Numbered and/or Lettered Bundled Wire for Power, Controls, Voice & Data in 1983



And 1997 Harnesses in Flexible Conduit



We Can Make an Unlimited Variety of Special Products to Help You Solve Problems to be Safer and More Profitable!

SP PRODUCTS, INC
Productivity and value thru ideas



**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

SP1-2

TABLE OF CONTENTS

1-2	HIGH QUALITY UNDERGROUND PRODUCTS
3-4	HIGH QUALITY ABOVE GRADE PRODUCTS
5-6	HIGH QUALITY CEILING ROUGH-IN PRODUCTS
7-8	HIGH QUALITY WALL ROUGH-IN PRODUCTS

Wire Assemblies

EZ1-1a	EZ Pull/EZ Read Home Runs, Networks, Round Robins, Full Boats
EZ2	EZ Pull/EZ Read Wire Harnesses for Power, Controls and Voice & Data
EZ3	Pre-Wired Flexible Conduit
EZ3a	THNN Outer Diameter Chart
EZ4	Phase Wire Marker

Installed Products

IP1	QwikDuct HDPE Template
IP2	QwikDuct HDPE Template Order Info
IP2a	QwikDuct Template HDPE Bore Spacers
IP2b	PVC Driver for Joining SCH 40/80 PVC Conduit
IP2c-d	QwikDuct HDPE Template Applications
IP3	QwikDuct HDPE Template Custom Feet
IP3a	PVC End Bell Adapter
IP3b	PVC Offset Couplings SCH 40 Only & Sizing Chart
IP3c	Male Threaded PVC Offset Couplings & Sizing Chart
IP3d	PVC Running Thread for PVC Conduit SCH 40/80
IP3e	HDPE PVC Conduit Guide
IP3f	Long Slip PVC Coupling
IP3g	Long Slip Bell PVC Coupling to RGD
IP4	Nylon Wrap Around Conduit Clamps
IP5	"The Original" 2 Way Box Support Plate
IP5a	"The Original" 1/2 Box Support Plate
IP6	4-Way Box Support Plate
IP6a	2-Way Box Support Plate
IP6b	"Original" Round & Modified Round Box Support Plate
IP6c	Universal Round Box Support Plate
IP6d	2-Way w/Split Fingers Box Support Plate
IP7	4-Way w/Split Fingers Box Support Plate
IP8	20" x 20" & 28" x 28" Junction Box Support Plate
IP8a	Grid System Junction Box Support Plate
IP9	Nylon Wrap-Around Conduit Straps
IP10	EZ Stub-Up Support Bracket
IP10a	EZ Stub-Up Support Bracket
IP11	Trapeze Brackets 5 & 6 Holes Per Foot
IP11a	Trapeze Brackets 4 & 8 Conduits
IP11b	Trapeze Brackets "Lay In" or "Feed Thru" for Larger Conduits

Installed Product

Wide Bottom Flange & Custom Trapeze Brackets	IP11c
Split Steel Nuts	IP11d

SLIP TRANSITION COUPLINGS - NO REAMING

Slip Fit PVC Transition Couplings Family	IP12¹⁻²
Slip Fit PVC to Galvanized Steel	IP12a
Slip Fit PVC to Flexible Conduit	IP12b
Slip Fit PVC to Sealtite/Liquidtight	IP12c
Slip Fit PVC to Aluminum	IP12d
Slip Fit PVC to EMT	IP12e
Slip Fit PVC to Stainless Steel	IP12f
Slip Fit PVC to End Bell	IP12g
Slip Fit PVC to Smooth Bushing	IP12h
Slip Fit PVC to Smooth Ground Bushing	IP12i
Slip Fit PVC to Compression EMT	IP12j
Slip Fit PVC to HDPE Conduit	IP12m
Slip Fit PVC to Fiberglass Conduit	IP12n

FEMALE ADAPTER COUPLINGS - NO REAMING

PVC Female Adapter Couplings Family	IP12³
PVC Female Adapter to Rigid Conduit	IP12p
PVC Female Adapter to EMT Conduit	IP12q
PVC Female Adapter Liquidtight/Sealtite Conduit	IP12r
PVC Female Adapter to PVC End Bell	IP12s
PVC Female Adapter to Flexible Conduit	IP12t
PVC Female Adapter to Compression EMT Conduit	IP12u

TAPERED TRANSITION COUPLINGS - REAMING REQUIRED

Tapered PVC Transition Couplings Family	IP13¹⁻²
PVC to PVC	IP13a
PVC to EMT	IP13b
PVC to Rigid	IP13c
PVC to Flexible	IP13d
PVC to EMT Compression	IP13e
PVC to Sealtite/Liquidtight	IP13f
PVC to Aluminum	IP13g
PVC to Stainless Steel	IP13h
PVC to Galvanized Rigid	IP13i
PVC to Smooth Bushing	IP13j
PVC to Inside PVC	IP13k
PVC to Female Threaded PVC	IP13l
PVC to Male Threaded PVC	IP13m
PVC to Threaded PVC	IP13m²
PVC Tapered to Threaded PVC	IP13n
PVC to MC Cable	IP13p
PVC Reducer	IP13q



PATENT PENDING
PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

TABLE OF CONTENTS

Installed Products

BELL END TRANSITION COUPLINGS - NO REAMING

IP13r	Liquidtite to RGD Conduit
IP13s	Liquidtite to EMT
IP13t	Liquidtite to EMT Compression
IP13u	RGD to EMT
IP13v	Galvanized Rigid Cplg. to PVC
IP13w	EMT to PVC End Bell

COMBINATION COUPLINGS

IP13³	Combination Couplings Family
IP13aa	Liquidtite to RGD Conduit
IP13bb	Liquidtite to EMT
IP13cc	Liquidtite to EMT Compression
IP13dd	RGD to EMT
IP13ee	RGD to EMT Compression
IP13ff	Flexible Conduit to EMT
IP13gg	Flexible Conduit to RGD
IP14	PVC End Bell Adapter
IP14a	PVC Threaded End Bell Adapter
IP14b	PVC Long End Bell Adapter
IP15	PVC Reaming Bits
IP15a	PVC Chamfer Bits
IP15b	Chuck Adapter
IP16	Aluminum & GRC Camfer Bits
IP17	No Center Stop Slide on Coupling
IP18	Masonry Block Box Brackets
IP18a	4 Conduit Threaded Block
IP19	4 Conduit Threadless Block
IP20	4 Conduit Threadless Block
IP20a	Box Support Rod Cubes
IP21	Support Hangers
IP21a	Qwik Block Box Support
IP22	Stub Up Slip Couplings
IP23	Original Cinch Clamp
IP24	Fire Alarm Bracket
IP25	Original "Big O"
IP26	"Big O" Flat - Box Support Bracket
IP27	Dual Wall Box Support Bracket
IP27a	Box Support Wall Bracket
IP27b	EP-10 Box Support Bracket
IP27c	Conduit Plug with ID Tag

Installed Products

Flat Fixed 1 Box Bracket	IP28
Flat Fixed 2 Box Bracket	IP28a
Flat Fixed 3 Box Bracket	IP28b
Flat Fixed 4 Box Bracket	IP28c
Slicknut Bushing Adapters for Pulling/Grounding Wire	IP30
Slicknut Bushing Adapters for Pulling Wire	IP31
EZ Hangers for T Bar Ceilings	IP32
T Bar Mounting Brackets	IP33
Adjustable Bar Hanger Assembly	IP34
Custom Nameplates & Labels	IP35
Roof Top Blox Conduit Support	IP36

Prefabricated Assemblies

Custom Prefabricated Cables for Data, Power & Distribution	PFA1
Prefabricated Assemblies	PFA2
Prefabricated Assemblies	PFA3
Adjustable Depth Mud Rings	PFA4
Grounding Pigtails & Custom Wire Leads	PFA5

Prefabricated Assemblies

Snap On/Off Adjustable & Reusable Protective Steel Covers	TE1
Rigid Pipe Joiner	TE2
Poly Roam Box Insert	TE3
Cut'N'Catch	TE4
PVC Reaming Bits	TE5
Live Panel Lockout Brackets	TE6
Live Panel Temporary Covers	TE7
Small Portable Cable Pullers	TE8
Anchor Bolt Templates	TE9-10
PVC Conduit Bender	TE11
Dry Wall Cut Out Templates	TE12
PVC Driver	TE13
EMT Conduit Layout Tool	TE14

SP Products Terms & Conditions	SP1
Buy American Act - Letter of Compliance	SP2
INDEX	SP3-16
SP Employment Opportunities	SP17
SP's Call for New Ideas and Compensation	SP18

SP's NEW PRODUCTS

Back
Cover



PATENT PENDING
PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

High Quality Underground Rough-in Products

IP1


Quik Duct

cUL US
Patent Pending

Safer Better Faster

HDPE CUSTOM TEMPLATES
In Any Configuration Required

Made from recycled material may qualify for Leed Credits!

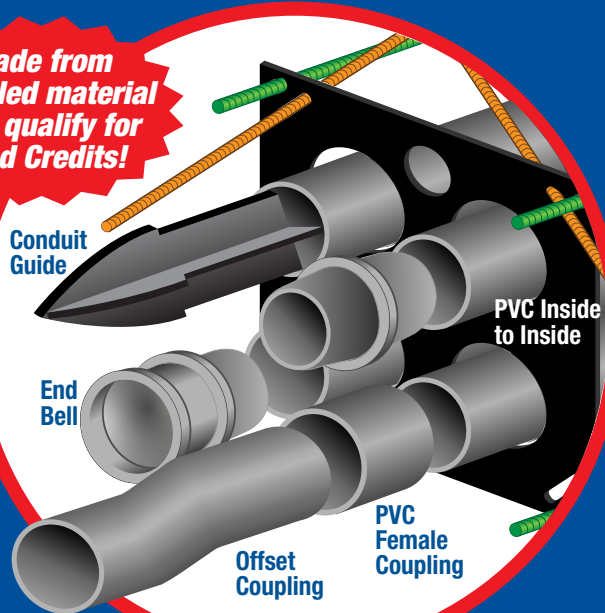

IP2a

cUL US

Bore Spacers

Single or double wall configuration. Roll assembled conduit into caissons and under obstructions.



IP3e

HDPE PVC Conduit Guide

Insert into PVC to automatically feed conduit lengths through continuous duct banks in your shop or in the field.

Patent Pending

Patent Pending

IP3a

PVC End Bell Adapter

Smooth edges ensure easy cable pull with no sharp edges to damage cable.



IP13k

Inside PVC to Inside PVC

Ream out PVC Conduits and join with the PVC Inside to inside coupling

Patent Pending

cUL US



IP3b IP3c

Patent Pending

PVC Offset

Conduit sizes 1/2" thru 6" 1/2" thru 3" Offsets Meets Flexible Mandrel Test Requirements. Threaded or unthreaded for use in vaults or electrical boxes.




IP12a

Slip PVC to Rigid Coupling

Sizes 1/2" thru 6" No reaming necessary, use standard PVC coupling and glue into stub-up. Simply slip into PVC coupling joining PVC stub-up to RGD conduit for quick transitions.

cUL US
Patent Pending

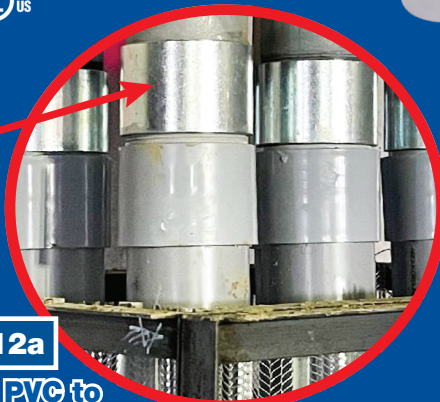

IP3g

Patent Pending

Long Slip Bell PVC to RGD Coupling



Sizes 1/2" thru 6" No reaming necessary, slips over PVC stub-up to join galvanized rigid conduit.



IP10

EZ STUB-UP

Support and secure multiple stub-ups on wooden forms before concrete pour.

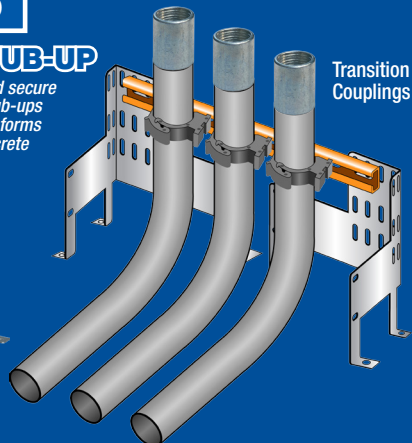

Patent Pending

IP2b

PVC Driver

Works with Hammer-drill using hammer function.



For Safer, Better, Faster Installations

High Quality Above Ground Rough-in Products

cULUS
Patented

IP12

**PVC Slip
Transition Couplings**
Reaming NOT Required



IP13a-p

PVC Transition Couplings
REAMING REQUIRED



cULUS
Patented

IP3g

Patent
Pending

**Long Slip Bell
PVC to RGD**
NO REAMING

Install coupling on top
of stub-up to convert
to RGD above slab.



IP3f

Patented

Long Slip PVC Coupling

Where Reaming is NOT Required
PVC Sch 40/80 - Allows longer & more stable
support than standard PVC coupling - Same ID



IP13v

Patent
Pending

Rigid to PVC

NO REAMING
Self threading
when metal is
needed below
the slab



IP15b

**Chuck
Adapter**
Converts Chuck



IP13s-u



**PVC Bell End
Adapters**

NO REAMING

Patented
cULUS



IP15

**One Piece
Reaming
Bits**

Patented

IP16

Chamfer Bits
For Aluminum &
Galvanized Rigid Conduit

Patent
Pending



IP14

End Bell Adapter
REAMING REQUIRED

PVC Sch 40/80

Patented



IP14a

cULUS
Patented

**Threaded
End Bell
Adapter**

PVC Sch 40/80
used with Standard
PVC Female Adapter



IP15a

Chamfer Bits
For Sch 40/80 PVC

Patent
Pending




For Safer, Better, Faster Installations

High Quality Ceiling Rough-in Products

IP8

**Junction
Box
Support
Plate**

cUL US Patent Pending

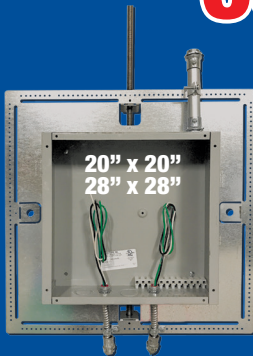


*Install vertically
or horizontally*

IP8a


**Grid System
Box Support
Plate**

cUL US Patent Pending



IP4

cUL US Patented



**"The Original"
2 Way Box Support**

IP11

**Trapeze
Brackets**


cUL US Patented



IP6a

cUL US Patented

**2 Way Box
Support
Plate**




IP6

cUL US Patented

**4 Way
Box
Support
Plate**


Supports KOs on back
of the box and center
side KOs only



IP6d

**2 Way Box
Support
Plate
with Fingers**

cUL US




IP7

**4 Way Box
Support Plate
with Fingers**

cUL US


Supports ALL KOs on
back and sides of the box
Vertically or Horizontally



IP19





4-Conduit Block



IP20



4-Conduit Block



IP20a




Box Support Rod Cube



IP21a



QwikBlock Box Support




Supported From A Single Threaded/Non-Threaded Rod

For Safer, Better, Faster Installations

High Quality Wall Rough-in Products

PFA4

**Adjustable
Depth Mud
Rings**



cULUS
Patented

IP18a

**Back Box
Bracket**


cULUS
Patented



IP18

cULUS
Patented


**Masonry
Box Bracket**

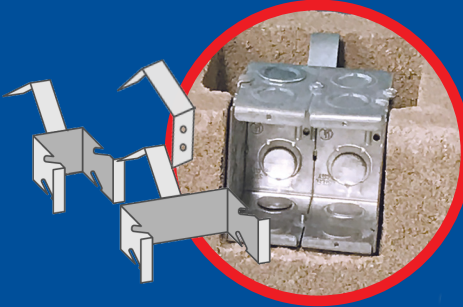

IP27

cULUS
Patented


**Dual Wall
Box Support
Bracket**

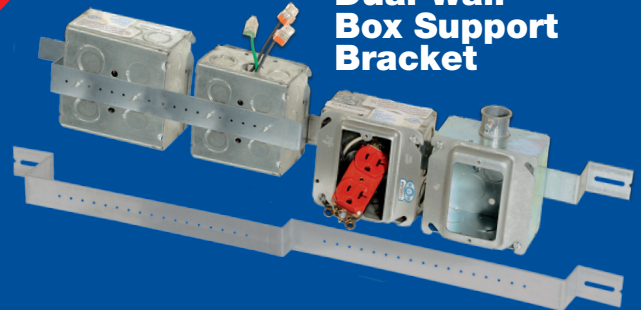

cULUS
Patented

IP27a


**Box Support
Wall Bracket**

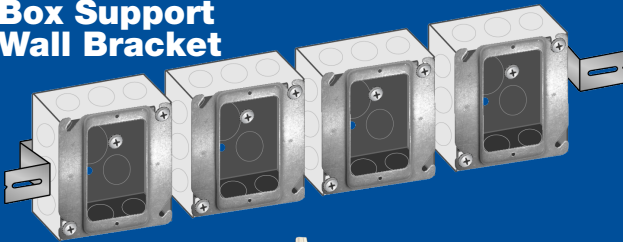

cULUS
Patented

IP24


**Box Support Bracket
for Alarms, Speakers
& Strobes**

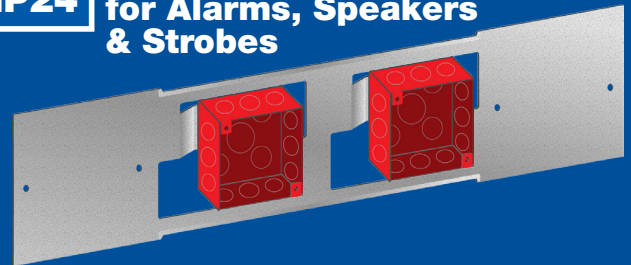

IP26

cULUS
Patented


**"BIG O" Flat Box
Support Bracket**

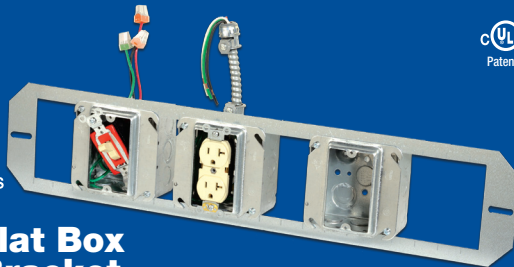

IP27b

cULUS
Patented



**Electro Post EP-10
Box Support
Bracket**

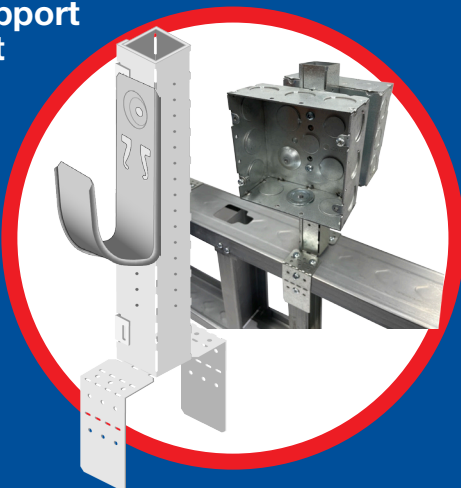

IP28

cULUS
Patented

**Flat Fixed
Position
Box
Support
Brackets**

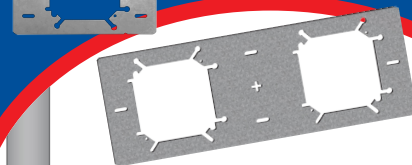

For Safer, Better, Faster Installations

EZ Pull – EZ Read



Home Runs, Networks Round Robins, Full Boats

Master Pulling Reels
HOME RUNS



SAFER - Set up only one reel. Approximately 50% of all home runs pulled on jobs throughout the year are common. Eliminates constantly handling and loading many heavy reels while installing the wire and again handling, hauling, and storing, partial reels of wire back at the shop at great expense.

Avoid expensive ringing out, tagging each conductor with costly markers that often are incorrect or fall off.

- **Cross tape only with easy to remove tabs for faster easier pulling.**
- Also, separate wires allow pulling individual wires in or out without removing entire harness.
- Conductors are easily added or removed later. Nylon lacing also available.
- Avoid expensive ringing out, tagging each conductor with costly markers that often are incorrect or fall off.
- Every wire tested for quality.
- Extra footage to guarantee length.
- Quantity discounts and labor only orders (customer supplies all material other than SP proprietary items) available for greater savings.
- If manufacturers' brands are not specified equals will be supplied.
- Assemblies are UL Listed provided all components are UL.
- Labor only orders negotiated
- Certificates of insurance at no charge for pay outs when storing.
- Conductors carefully inspected for excellent quality plus reels properly marked & shipped flat or standing upright on skids for easier unloading & handling on job sites.
- 2500 foot reels from manufacturers often run short. Home runs will only be as long as shortest reel of the conductors involved plus some footage loss when striping or printing each conductor. Allowed for SP to order longer reels.



Catalog #	Description	Reel Size	lbs./ Reel
#12 THHN Solid and Stranded			
HR 5C 12SOL 2500	5 Conductor #12 THHN Solid x 2500 foot Reel no wires printed or striped	22 w x 30 h	375
HR 5C 12STR 2500	5 Conductor #12 THHN Stranded x 2500 foot Reel and same as above -or- x 2500 foot reel no wires printed or striped	22 w x 30 h	375
HR 7C 12SOL 2500	7 Conductor #12 THHN Solid x 2500 foot Reel 3 Neutrals identified and plus 4 wires not printed or striped	22 w x 30 h	525
HR 7C 12STR 2500	7 Conductor #12 THHN Stranded and same as above -or- x 2500 foot reel - 3 Neutrals identified and plus 4 wires not printed or striped	22 w x 30 h	525
#10 THHN Solid and Stranded			
HR 5C 10SOL 2500	5 Conductor #10 THHN Solid x 2500 foot Reel no wires printed or striped	28 w x 36 h	600
HR 5C 10STR 2500	5 Conductor #10 THHN Stranded same as above	28 w x 36 h	600
HR 7C 10SOL 2500	7 Conductor #10 THHN Solid x 2500 foot Reel 3 Neutrals identified and plus 4 wires not printed or striped	28 w x 36 h	840
HR 7C 10STR 2500	7 Conductor #10 THHN Stranded x 2500 foot Reel 3 Neutrals identified and plus 4 wires not printed or striped	28 w x 36 h	840

**Tell Us What You Need
– We'll Make It!**

Customer must satisfy all codes and owners' specifications.



PATENT PENDING
PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

EZ1-1a



EZ Pull - EZ Read Wire Harnesses



CABLE




Striped or Numbered & Lettered Conductors



CIRCUIT SIZES

Eliminates Ringing Out & Tagging

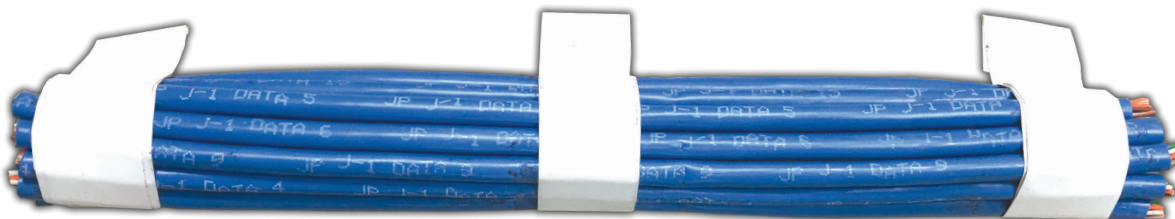

LOW VOLTAGE

#18 thru #1/0 Gauge Wire: THHN, XHHW, XLP/USE, EPR HYPALON, etc. or equal size Cat 5 or 6, enhanced Cat 5 or 6 low voltage. Plus all other manufacturers brands and other types of wire including low voltage cables.

NOTE: We strongly recommend using water based pulling lubes when pulling silicon and other similar types of wire insulation which DO NOT allow our printing to properly adhere. In this case we can make wire markers with any nomenclature required and apply them at any location of the harnesses on the conductors per customers specification.

Set Up and Pull Off 1 Reel – Eliminates Wire Pulling Equipment

Customer must satisfy all codes and owners' specifications.



PATENT PENDING
PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

EZ2

EZ Pull - EZ Read



Pre-Wired Flexible Conduit Custom Assemblies



*We invented and introduced these products
to the electrical industry in 1981, 1991 & 1997*

- **Up thru 200 foot long lengths** any type of wire or cable, including: fibre optic, in any type of flexible steel or aluminum, liquidtight, ENT, NMLT, etc. conduit.

NOTE: Low voltage and power cable should not be combined.

- Conductors printed with any combination of numbers, letters or symbols repeated every half inch along their length.

- Any color PVC jacket and thicknesses available for greater protection in wet locations, corrosive areas or embedding in concrete.

- Quantity discounts, labor only orders (customer supplies wire) and firm price blanket orders available.

- If manufacturers' brands are not specified equals will be supplied.

SAFER - BETTER - FASTER

PV Cable Harnesses Also Available for Solar & Wind Farms



PATENT PENDING
PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

EZ3

THHN Copper Harnesses

Approximate Outer Diameters



Wire Size	Single OD	NUMBER OF CONDUCTORS (Size shown in inches)									
		3	4	5	6	7	19	37	61	91	127
18	0.096	0.192	0.221	0.288	0.288	0.288	0.480	0.672	0.86	1.060	1.248
16	0.106	0.212	0.244	0.318	0.318	0.318	0.530	0.742	0.954	1.166	1.378
14	0.112	0.244	0.258	0.336	0.336	0.336	0.560	0.784	1.008	1.323	1.456
12	0.131	0.262	0.302	0.393	0.393	0.393	0.655	0.917	1.179	1.441	1.703
10	0.165	.0330	0.380	0.495	0.495	0.495	0.825	1.155	1.485	1.815	2.145
8	0.218	0.436	0.502	0.654	0.654	0.654	1.090	1.526	1.962	1.962	2.834
6	0.257	0.514	0.591	0.771	0.771	0.771	1.285	1.800	2.313	2.830	3.341
4	0.328	0.656	0.755	0.984	0.984	0.984	1.640	2.300			
3	0.356	0.710	0.820	1.070	1.070	1.070	1.780	2.490			
2	0.388	0.780	0.890	1.160	1.160	1.160	1.940	2.270			
1	0.450	0.900	1.040	1.350	1.350	1.350	2.250	3.150			
1/0	0.491	0.980	1.130	1.470	1.470	1.470	2.460				
2/0	0.537	1.070	1.240	1.610	1.610	1.610	2.690				
3/0	0.588	1.180	1.350	1.760	1.760	1.760	2.940				
4/0	0.646	1.290	1.490	1.940	1.940	1.940	3.230				
Number of Layers		2	3	3	3	3	5	7	9	11	13

PRE-WIRED FLEXIBLE CONDUIT ASSEMBLIES DO NOT MEET MC CABLE SPECIFICATIONS PER THE NATIONAL ELECTRIC CODE AND DO NOT HAVE FILLERS OR ANY TYPE WRAPPING AROUND CONDUCTORS WITHIN THE FLEXIBLE CONDUIT.

SAFER – BETTER – FASTER

Customer is responsible to ensure Wire Harnesses meet all codes plus owners' and specifying engineers' requirements.



**PATENT PENDING
PATENTED**




LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

EZ3a



Phase Wire Marker

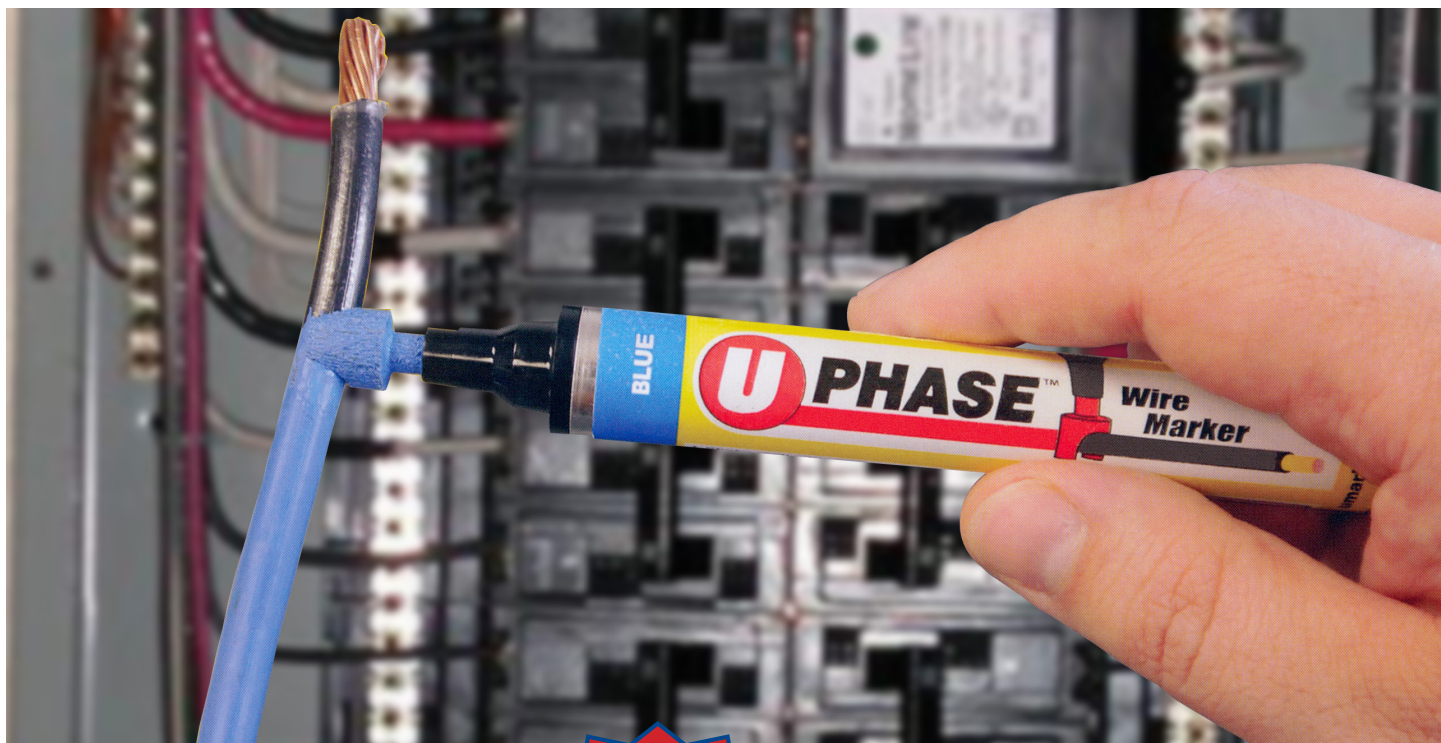

Cat# (specify color)	Desc.
PWM100	Regular Tip
PWM200	Wide Tip

- Fast drying (in just 30 seconds) paint resists handling, heat and UV Light plus adheres to clean sheath permanently
- Lasts for 1 year from date of purchase provided tube is immediately & properly capped after each use
- **EACH TUBE CAN MARK MORE THAN 600 LINEAR FEET OF WIRE**
- Ideal for Panels, Color Coding and identifying Wiring Circuits, Cat 5 Ethernet plus audio/video and HDMI Cable, Automotive Wire, etc.



PATENTED

Available in the following colors:

B = Black

GR = Gray

V = Violet

BL = Blue

O = Orange

W = White

BRN = Brown

P = Pink

Y = Yellow

GRN = Green

R = Red

Extremely faster than tape to handle & apply
Save Hundreds of dollars per tube



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

EZ4

UL Listed  **MADE IN USA** **Quality Innovative Products**

That Help Do Jobs...

SAFER

**NO WORKERS BELOW
PREVENTS INJURIES
OR DEATHS**



BETTER


**RATED AT 4,000 PSI
TENSILE STRENGTH
AT BREAK**

QwikDuct
HDPE CUSTOM TEMPLATES

Patent Pending


**OVER 12X
FASTER
THAN SPACERS
& CHAIRS**

IP1



Eliminates dangerous & expensive time working in trench strengthening weak spacers & chairs with tie wire or other methods.

Lowering assembled conduit from above allows other savings – Digging a narrower trench for less excavation, concrete or slurry, shoring and backfill. The savings are huge!

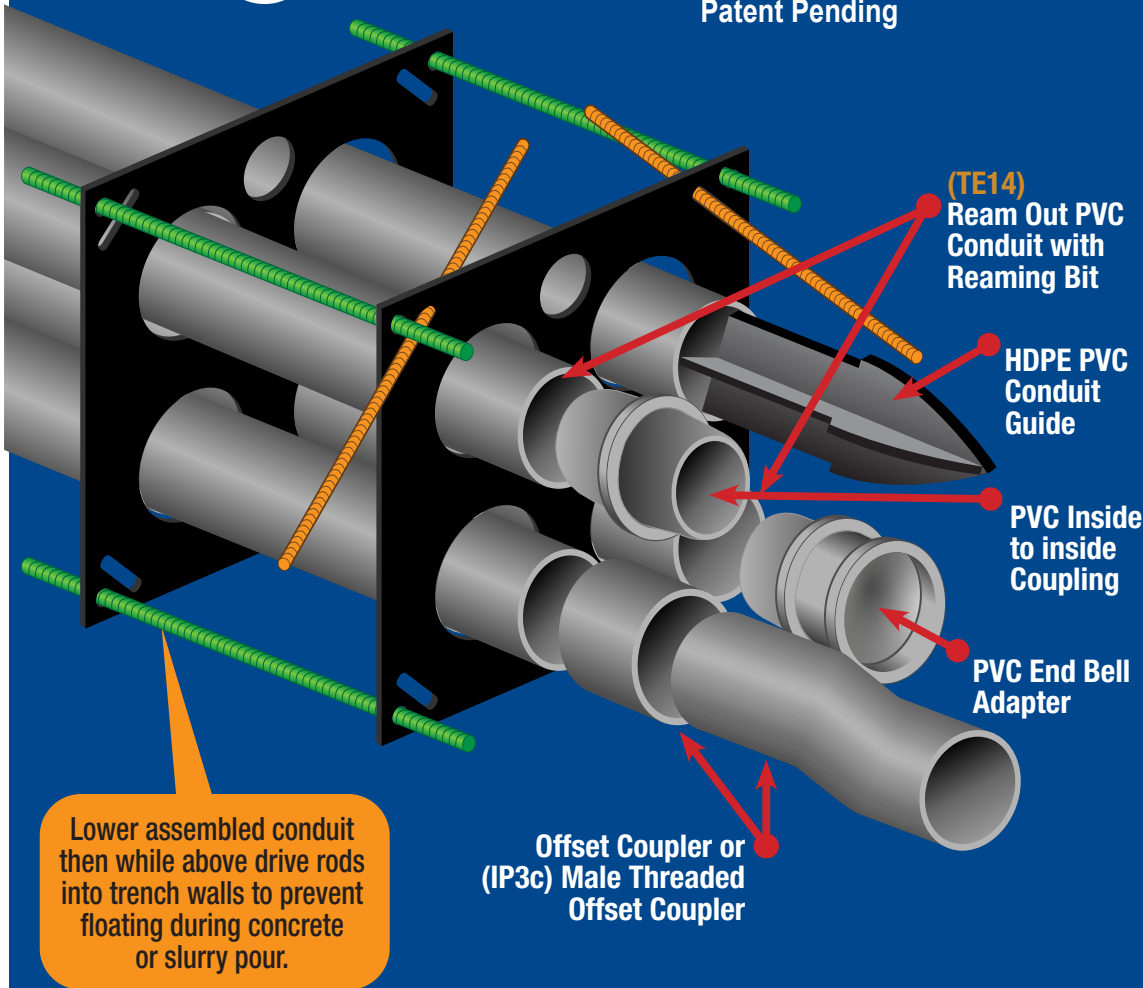

ALSO SUITABLE FOR TRANSFORMER & SWITCHGEAR STUB UPS

Submittals provided with all duct bank quotes

SP PRODUCTS, INC
Productivity and value thru ideas



**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP1



QwikDuct HDPE

CUSTOM TEMPLATES



WHEN ORDERING CUSTOMER MUST SPECIFY:


1. **Material Thickness 3/8", 1/2", 3/4"** and Load Rating Required
2. Size & Location of Rebar Holes
3. Spacing Between Conduit Openings
4. Rebar Stake Down Slots Required?
5. Diameter of Conduits
6. Footage Between Templates
7. Size & Location of Concrete Flow Holes

WHEN ASSEMBLING ABOVE THE TRENCH:

1. Install Conduits into Templates & Rebar if Required
2. Lower Assemblies into Trench
3. Insert Stake Down Rods into Angled Slots
4. Drive Stake Down Rods into Trench Walls from Above
5. Backfill with Concrete, Slurry, Sand or Gravel etc.

SEE WEBSITE
VIDEO **IP1-2**

QwikDuct Templates can be used with all standardized trade size conduit specified per NFPA 70 NEC

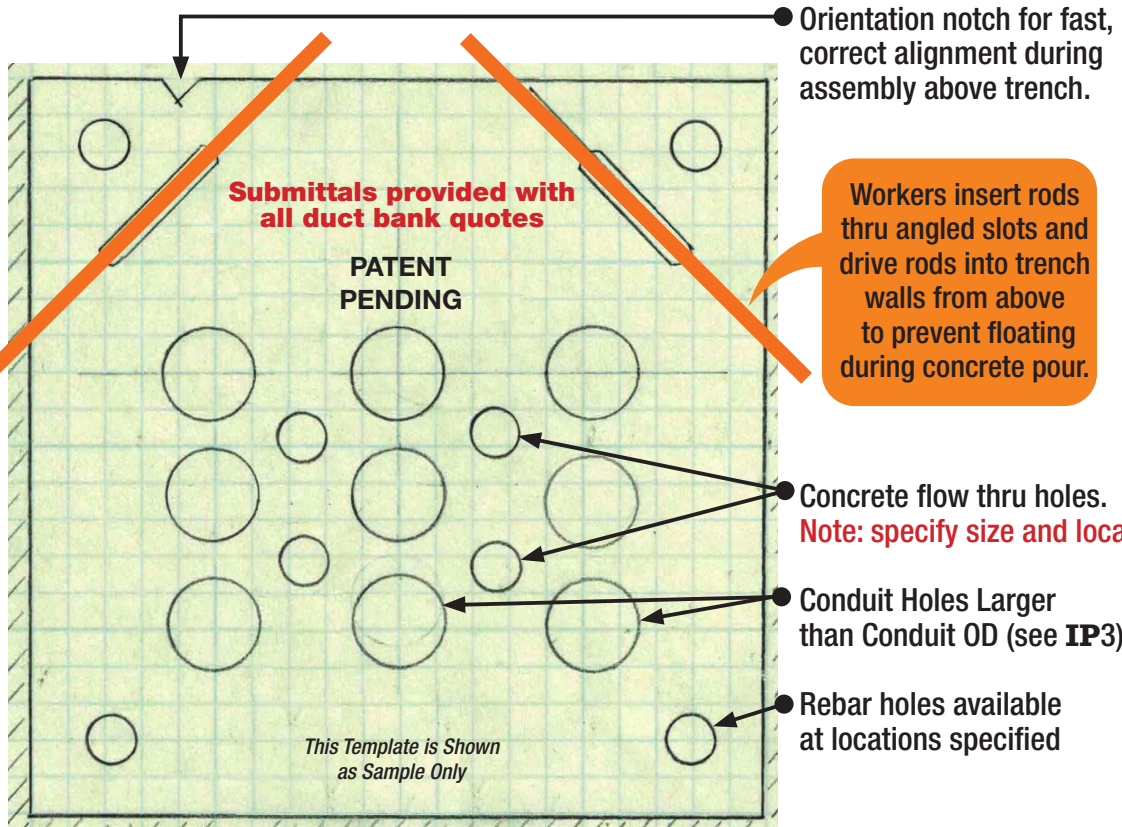

QWIKDUCT HDPE CUSTOM TEMPLATES meet or exceed **US Army Corps of Engineers** requirement.

Customer must specify larger diameter holes to enable feeding bell ends of conduit from either direction.

PROVIDE SAFER & FASTER INSTALLATION PLUS ALLOW CLOSING TRENCH QUICKER TO REDUCE CHANCE OF DANGEROUS & COSTLY SOIL OR WATER PROBLEMS.

ALSO SUITABLE FOR TRANSFORMER & SWITCHGEAR STUB UPS



PATENT PENDING
PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP2

QwikDuct HDPE Bore Spacers



SEE WEBSITE
VIDEO **IP2a**

**3/4" HDPE for Greater
Strength to Accommodate
Assemblies with Wheels.**

**2" Diameter Wheels are Standard, Larger
Size Diameters Available Upon Request**

**Roll assembled conduit into
caissons under obstructions.**

WHEN ORDERING CUSTOMER MUST SPECIFY:

1. **Material Thickness 3/8", 1/2", 3/4"** and Load Rating Required
2. Size & Location of Rebar Holes
3. Spacing Between Conduit Openings
4. Rebar Stake Down Slots Required?
5. Diameter of Conduits
6. Footage Between Templates
7. Size & Location of Concrete Flow Holes
8. Size, Number & Location of Wheels

**Customer must specify larger diameter holes to enable
feeding bell ends of conduit from either direction.**



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS **ONLY WHERE SHOWN ABOVE**



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP2a

PVC Driver


for Joining SCH 40/80 PVC Conduit



SEE WEBSITE
VIDEO **IP2b**

Assemble PVC conduits in a Duct Bank on a job site or prefab using the PVC Driver with a Hammer Drill to join 2 pieces of PVC conduit in a matter of seconds.

Catalog #	SCH 40/80 PVC Conduit Size
PVCD-100-125-150	1", 1-1/4" & 1-1/2"
PVCD-200-250-300	2", 2-1/2" & 3"
PVCD-350-400	3-1/2" & 4"
PVCD-500	5"
PVCD-600	6"
PVCD-800	8"

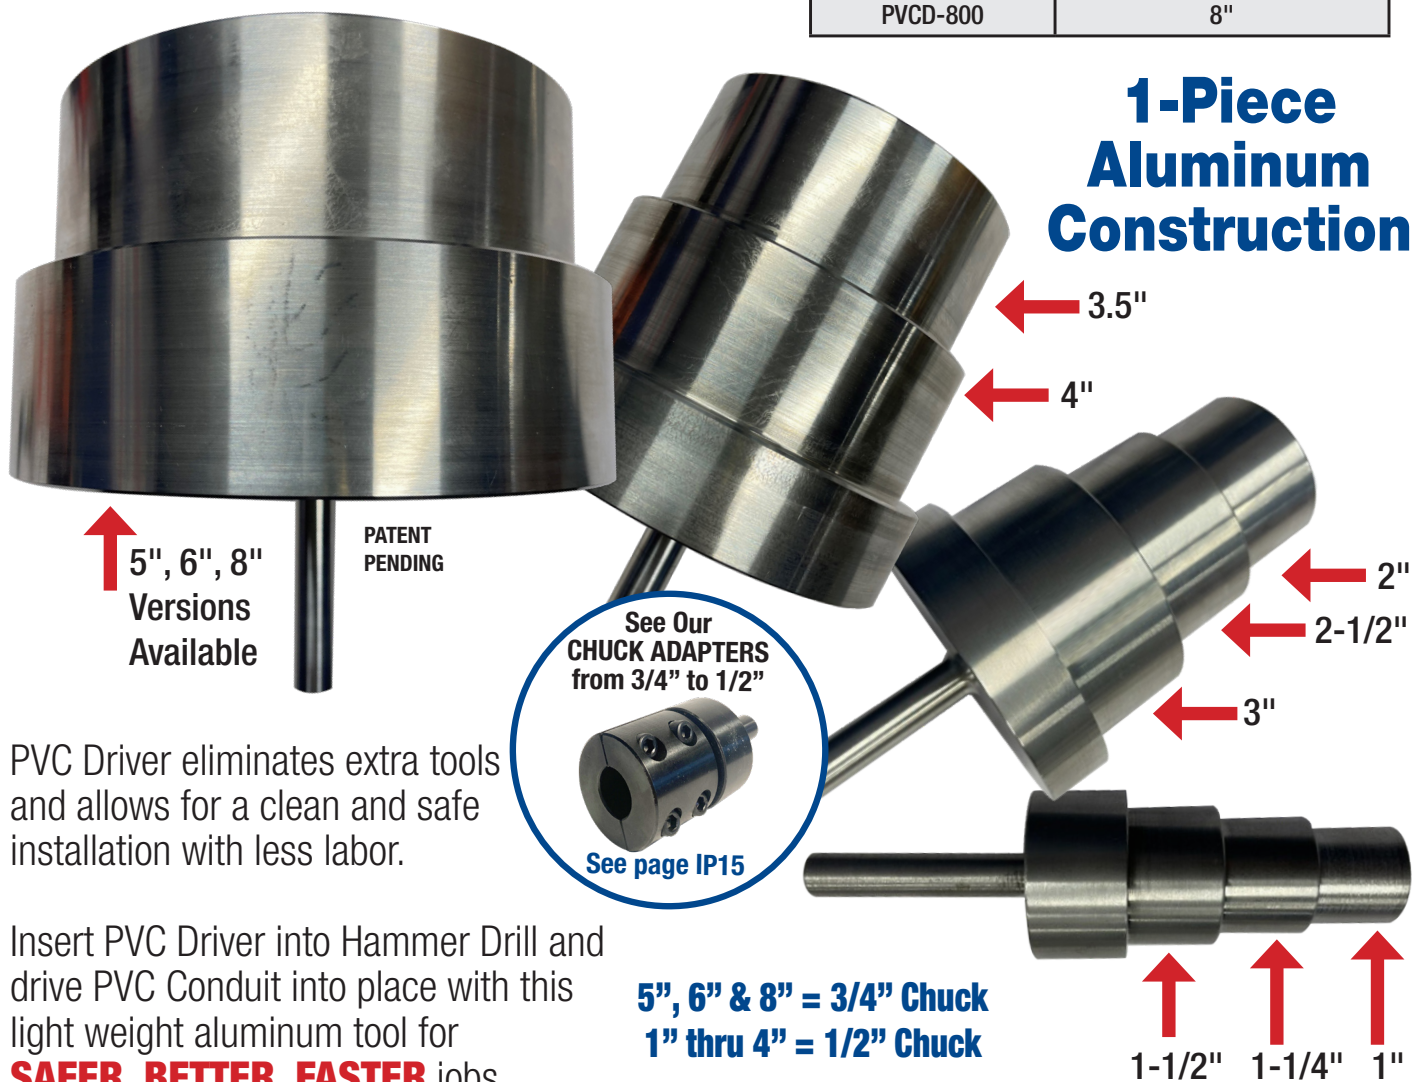

PVC Driver eliminates extra tools and allows for a clean and safe installation with less labor.

Insert PVC Driver into Hammer Drill and drive PVC Conduit into place with this light weight aluminum tool for **SAFER, BETTER, FASTER** jobs.

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC
Productivity and value thru ideas



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP2b



QwikDuct HDPE

CUSTOM TEMPLATES



Please visit spproducts.com to see video IP1 & IP2

Do Jobs SAFER BETTER FASTER! Earn More Profit!

It took two men a full day to assemble the first 20 feet. It required 15 3½" conduits and one 2½" conduit to turn up for a tap box, a few feet away, two of the 3½" and one of the 2½" had to turn up to go in to separate CT cabinets and then turn back down to continue the full length.

On the day of trenching we just moved this section over, and it took four men 4 hours to assemble the remainder of the run. It should take another 12 man hours to make the connection between the 16 conduits the existing stubs out of the building.

Ideal for stubbing up for Transformers & Switch Gear

QWIK DUCT Templates can be used with all standardized trade size conduit specified per NFPA 70 NEC

FREE SPECIAL OFFER!

Contractor customer earns \$1,000 worth of any size 1 Piece Reaming Bits for every \$100,000 purchases of any of SP's products based on their contractor's cost within a 12 month period starting with the date of 1st order of program.

To qualify contractor customer must accept this offer with a dated, signed agreement properly recorded and filed by SP Products and contractor must renew the agreement at the end of every year if he chooses to continue the program.

IMPORTANT!

- Customer is responsible for meeting all specifications on the job and must inform SP if heavier than schedule 80 PVC conduit is installed.
- For heavier loads (steel, rigid, EMT or other heavier conduit) we strongly suggest customer installs rebar on outside perimeter to transfer the load away from the templates.
- Customer is also responsible for calculating and meeting all load bearing specifications.
- Heavier conduit should be fed thru the lower openings in the template if otherwise SP must be informed prior to installation.



US

PATENT PENDING
PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP2c-d


QwikDuct HDPE



CUSTOM QWIKDUCT TEMPLATE FEET



SNAP-ON TEMPLATE


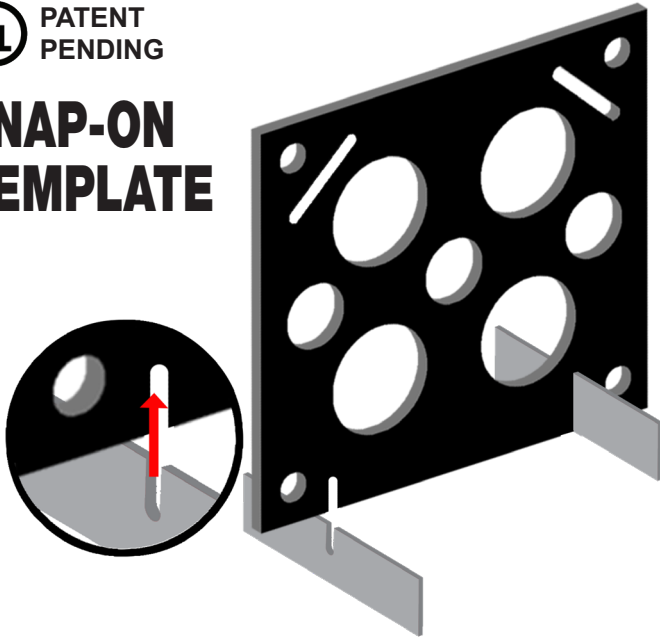


Unique interlock system serves as a base & keeps templates upright

Quickly apply glue if needed to keep feet in place when lowering



BOLT-ON TEMPLATE

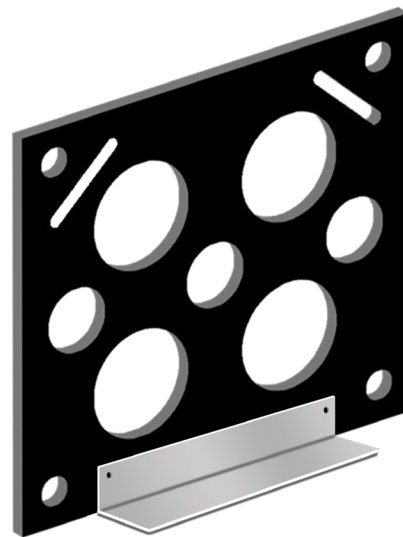

Customer must specify all details. Sold separately or installed by SP. Attach any length 2" tall x up thru 4" wide base, 16 gauge galvanized steel to bottom of templates.

Customer must allow air space to allow concrete flow under templates and feet.

Attach both angle irons with 2 bolts and nuts for each template during assembly on job site before lowering into trench

QWIKDUCT TEMPLATE HOLE SIZING GUIDE

Customer must make certain conduit openings are wide enough to allow the bell end of conduit to be fed thru from either direction if required by specs.

SCHEDULE 40 PVC CONDUIT SIZE (Inches)

1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	3 1/2	4	5	6	8
-----	-----	---	-------	-------	---	-------	---	-------	---	---	---	---

SUGGESTED DIAMETER OF CONDUIT HOLE (Inches) For Bell End Clearance

1 1/4	1 1/2	2	2 1/4	2 1/2	3	3 1/2	4 1/4	5	5 1/4	6 1/4	7 1/2	9 3/4
-------	-------	---	-------	-------	---	-------	-------	---	-------	-------	-------	-------

NOTE: A MINIMUM OF 1 1/2 OF MATERIAL INCH MUST BE MAINTAINED BETWEEN CONDUIT AND ALL OPENINGS TO COMPLY WITH UL REQUIREMENTS.

Customer must satisfy all codes and owners' specifications.



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP3

PVC End Bell Adapter


Sizes 1/2" thru 6"




PATENT
PENDING

Catalog #	Size
PEBA#50	1/2 inches
PEBA#75	3/4 inches
PEBA#100	1 inches
PEBA#125	1 1/4 inches
PEBA#150	1 1/2 inches
PEBA#4200	2 inches
PEBA#250	2 1/2 inches
PEBA#300	3 inches
PEBA#350	3 1/2 inches
PEBA#400	4 inches
PEBA#500	5 inches
PEBA#600	6 inches

PVC Schedule 40 & 80
Smooth edges allow for
trouble free wire
& cable pulls

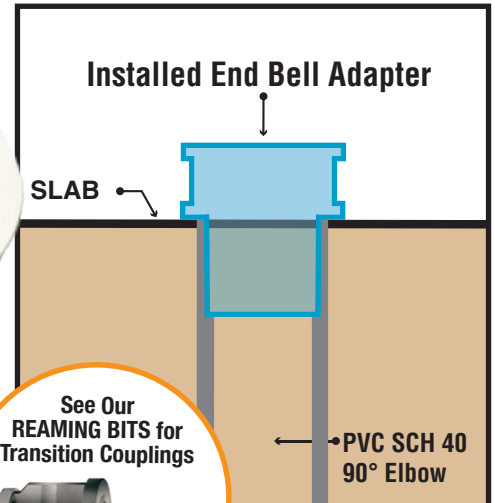

See Our
REAMING BITS for
Transition Couplings




See page IP15


All Above Meet UL651 Plus...
CSA C22.2, No. 85 and US Army Corps
Engineers Specifications

Transitions in Less Than 5 Minutes!
Save Cost on the Rigid Nipple, Tape & Labor
Use for Entire Job - Not Just for Repair


Perfect for use with QwikDuct HDPE Templates for Railway, Highway & Tollway

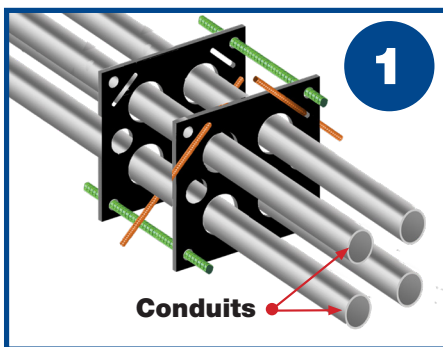

1. Align QwikDuct close to manhole or vault

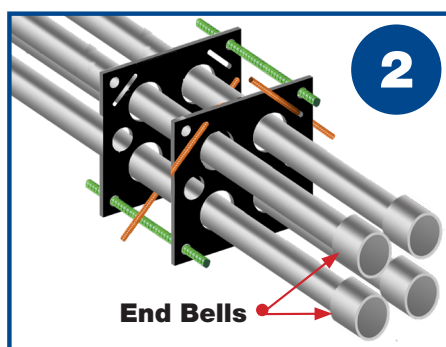

2. Ream out conduits and glue on end bell adapters to each conduit inside or outside manhole or vault

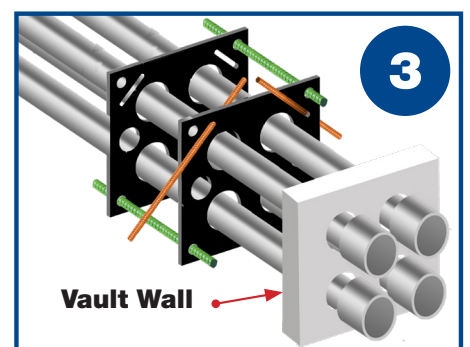

3. Slide conduits with bell end adapters thru manhole openings inside or outside manhole or vault

SP PRODUCTS, INC
Productivity and value thru ideas



PATENT PENDING
PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP3a

PVC Offset Couplings



Schedule 40 ONLY


Save
at Least
1 Hour per
Installation.

NEW

- PVC Offset used to join conduits when they shift due to stress of concrete pour
- Offset facilitates ease of installation without need to chip out concrete

**OFFSET COUPLINGS
MEET MANDREL TEST
REQUIREMENTS**

PATENT
PENDING

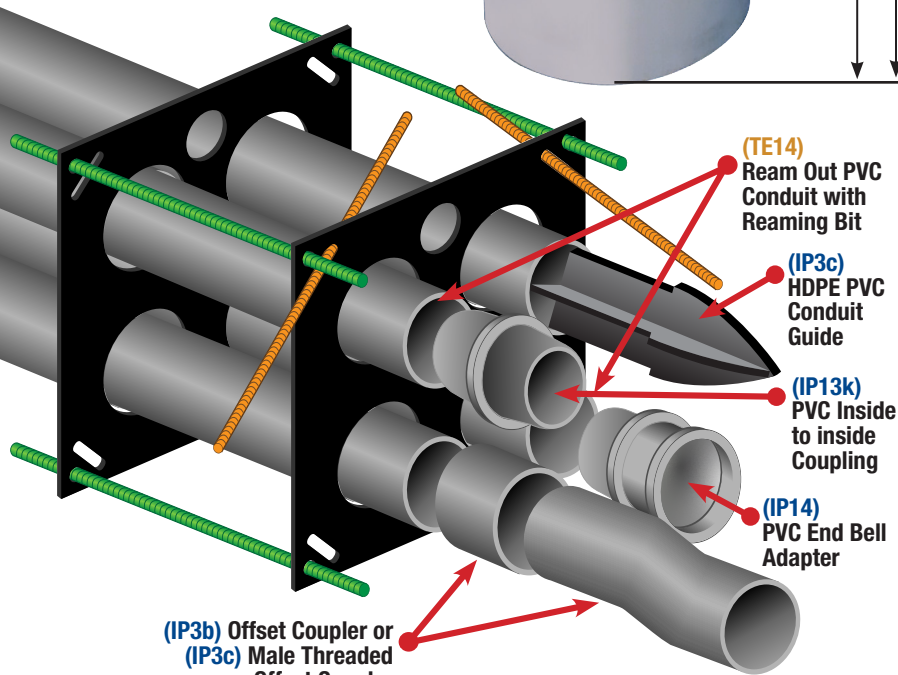

Conduit Sizes 1/2" thru 6" Offset Sizing Chart & Catalog Numbers

Size	Offset	Cat #
1/2"	1/2"	50-PVC-OFFSET 50
	3/4"	50-PVC-OFFSET 75
	1"	50-PVC-OFFSET 100
	1-1/4"	50-PVC-OFFSET 125
	1-1/2"	50-PVC-OFFSET 150
	2"	50-PVC-OFFSET 200
	3"	50-PVC-OFFSET 300
3/4"	1/2"	75-PVC-OFFSET 50
	3/4"	75-PVC-OFFSET 75
	1"	75-PVC-OFFSET 100
	1-1/4"	75-PVC-OFFSET 125
	1-1/2"	75-PVC-OFFSET 150
	2"	75-PVC-OFFSET 200
	3"	75-PVC-OFFSET 300
1"	1/2"	100-PVC-OFFSET 50
	3/4"	100-PVC-OFFSET 75
	1"	100-PVC-OFFSET 100
	1-1/4"	100-PVC-OFFSET 125
	1-1/2"	100-PVC-OFFSET 150
	2"	100-PVC-OFFSET 200
	3"	100-PVC-OFFSET 300
1-1/4"	1/2"	125-PVC-OFFSET 50
	3/4"	125-PVC-OFFSET 75
	1"	125-PVC-OFFSET 100
	1-1/4"	125-PVC-OFFSET 125
	1-1/2"	125-PVC-OFFSET 150
	2"	125-PVC-OFFSET 200
	3"	125-PVC-OFFSET 300
1-1/2"	1/2"	150-PVC-OFFSET 50
	3/4"	150-PVC-OFFSET 75
	1"	150-PVC-OFFSET 100
	1-1/4"	150-PVC-OFFSET 125
	1-1/2"	150-PVC-OFFSET 150
	2"	150-PVC-OFFSET 200
	3"	150-PVC-OFFSET 300
2"	1/2"	200-PVC-OFFSET 50
	3/4"	200-PVC-OFFSET 75
	1"	200-PVC-OFFSET 100
	1-1/4"	200-PVC-OFFSET 125
	1-1/2"	200-PVC-OFFSET 150
	2"	200-PVC-OFFSET 200
	3"	200-PVC-OFFSET 300

Size	Offset	Cat #
3"	1/2"	300-PVC-OFFSET 50
	3/4"	300-PVC-OFFSET 75
	1"	300-PVC-OFFSET 100
	1-1/4"	300-PVC-OFFSET 125
	1-1/2"	300-PVC-OFFSET 150
	2"	300-PVC-OFFSET 200
	3"	300-PVC-OFFSET 300
3-1/2"	1/2"	350-PVC-OFFSET 50
	3/4"	350-PVC-OFFSET 75
	1"	350-PVC-OFFSET 100
	1-1/4"	350-PVC-OFFSET 125
	1-1/2"	350-PVC-OFFSET 150
	2"	350-PVC-OFFSET 200
	3"	350-PVC-OFFSET 300
4"	1/2"	400-PVC-OFFSET 50
	3/4"	400-PVC-OFFSET 75
	1"	400-PVC-OFFSET 100
	1-1/4"	400-PVC-OFFSET 125
	1-1/2"	400-PVC-OFFSET 150
	2"	400-PVC-OFFSET 200
	3"	400-PVC-OFFSET 300
5"	1/2"	500-PVC-OFFSET 50
	3/4"	500-PVC-OFFSET 75
	1"	500-PVC-OFFSET 100
	1-1/4"	500-PVC-OFFSET 125
	1-1/2"	500-PVC-OFFSET 150
	2"	500-PVC-OFFSET 200
	3"	500-PVC-OFFSET 300
6"	1/2"	600-PVC-OFFSET 50
	3/4"	600-PVC-OFFSET 75
	1"	600-PVC-OFFSET 100
	1-1/4"	600-PVC-OFFSET 125
	1-1/2"	600-PVC-OFFSET 150
	2"	600-PVC-OFFSET 200
	3"	600-PVC-OFFSET 300

QwikDuct Templates can be used with
all standardized trade size conduit
specified per NFPA 70 NEC

SP PRODUCTS, INC
Productivity and value thru ideas



PATENT PENDING
PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP3b

Male Threaded PVC Offset

Schedule 40 ONLY



Save
at Least
1 Hour per
Installation.

NEW

**1/2" thru 3" Offset for
Conduit Sizes 1/2" thru 6"**

**Meets Mandrel
Test Requirements**

**Use When Conduit Shifts
Due to Stress of Pour**

PATENT
PENDING




Conduit Sizes 1/2" thru 6"

Offset Sizing Chart & Catalog Numbers

Size	Offset	Cat #
1/2"	1/2"	50-PVC-OFFSET-THR 50
	3/4"	50-PVC-OFFSET-THR 75
	1"	50-PVC-OFFSET-THR 100
	1-1/4"	50-PVC-OFFSET-THR 125
	1-1/2"	50-PVC-OFFSET-THR 150
	2"	50-PVC-OFFSET-THR 200
	3"	50-PVC-OFFSET-THR 300
3/4"	1/2"	75-PVC-OFFSET-THR 50
	3/4"	75-PVC-OFFSET-THR 75
	1"	75-PVC-OFFSET-THR 100
	1-1/4"	75-PVC-OFFSET-THR 125
	1-1/2"	75-PVC-OFFSET-THR 150
	2"	75-PVC-OFFSET-THR 200
	3"	75-PVC-OFFSET-THR 300
1"	1/2"	100-PVC-OFFSET-THR 50
	3/4"	100-PVC-OFFSET-THR 75
	1"	100-PVC-OFFSET-THR 100
	1-1/4"	100-PVC-OFFSET-THR 125
	1-1/2"	100-PVC-OFFSET-THR 150
	2"	100-PVC-OFFSET-THR 200
	3"	100-PVC-OFFSET-THR 300
1-1/4"	1/2"	125-PVC-OFFSET-THR 50
	3/4"	125-PVC-OFFSET-THR 75
	1"	125-PVC-OFFSET-THR 100
	1-1/4"	125-PVC-OFFSET-THR 125
	1-1/2"	125-PVC-OFFSET-THR 150
	2"	125-PVC-OFFSET-THR 200
	3"	125-PVC-OFFSET-THR 300
1-1/2"	1/2"	150-PVC-OFFSET-THR 50
	3/4"	150-PVC-OFFSET-THR 75
	1"	150-PVC-OFFSET-THR 100
	1-1/4"	150-PVC-OFFSET-THR 125
	1-1/2"	150-PVC-OFFSET-THR 150
	2"	150-PVC-OFFSET-THR 200
	3"	150-PVC-OFFSET-THR 300
2"	1/2"	200-PVC-OFFSET-THR 50
	3/4"	200-PVC-OFFSET-THR 75
	1"	200-PVC-OFFSET-THR 100
	1-1/4"	200-PVC-OFFSET-THR 125
	1-1/2"	200-PVC-OFFSET-THR 150
	2"	200-PVC-OFFSET-THR 200
	3"	200-PVC-OFFSET-THR 300

Size	Offset	Cat #
3"	1/2"	300-PVC-OFFSET-THR 50
	3/4"	300-PVC-OFFSET-THR 75
	1"	300-PVC-OFFSET-THR 100
	1-1/4"	300-PVC-OFFSET-THR 125
	1-1/2"	300-PVC-OFFSET-THR 150
	2"	300-PVC-OFFSET-THR 200
	3"	300-PVC-OFFSET-THR 300
3-1/2"	1/2"	350-PVC-OFFSET-THR 50
	3/4"	350-PVC-OFFSET-THR 75
	1"	350-PVC-OFFSET-THR 100
	1-1/4"	350-PVC-OFFSET-THR 125
	1-1/2"	350-PVC-OFFSET-THR 150
	2"	350-PVC-OFFSET-THR 200
	3"	350-PVC-OFFSET-THR 300
4"	1/2"	400-PVC-OFFSET-THR 50
	3/4"	400-PVC-OFFSET-THR 75
	1"	400-PVC-OFFSET-THR 100
	1-1/4"	400-PVC-OFFSET-THR 125
	1-1/2"	400-PVC-OFFSET-THR 150
	2"	400-PVC-OFFSET-THR 200
	3"	400-PVC-OFFSET-THR 300
5"	1/2"	500-PVC-OFFSET-THR 50
	3/4"	500-PVC-OFFSET-THR 75
	1"	500-PVC-OFFSET-THR 100
	1-1/4"	500-PVC-OFFSET-THR 125
	1-1/2"	500-PVC-OFFSET-THR 150
	2"	500-PVC-OFFSET-THR 200
	3"	500-PVC-OFFSET-THR 300
6"	1/2"	600-PVC-OFFSET-THR 50
	3/4"	600-PVC-OFFSET-THR 75
	1"	600-PVC-OFFSET-THR 100
	1-1/4"	600-PVC-OFFSET-THR 125
	1-1/2"	600-PVC-OFFSET-THR 150
	2"	600-PVC-OFFSET-THR 200
	3"	600-PVC-OFFSET-THR 300

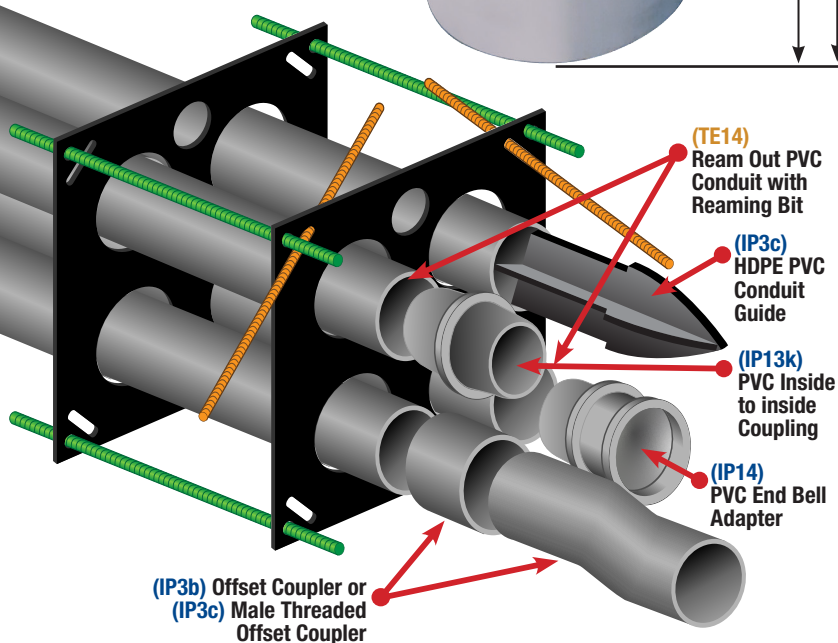

**QwikDuct Templates can be used with
all standardized trade size conduit
specified per NFPA 70 NEC**

SP PRODUCTS, INC
Productivity and value thru ideas



PATENT PENDING
PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP3c

PVC Running Thread for PVC Conduit SCH 40/80

- Order 1/2" thru 6" conduit cut to desired length Running Thread PVC Conduit SCH 40/80 or order our **standard 6 inch length**
- Use with PVC Female adapter or locknut for any type of conduit application
- Or order several 6" PVC Running Thread Conduits and cut to desired length on the jobsite



SIZE	LENGTH	CATALOG #
1/2"	Specify	PVN-50-40
3/4"	Specify	PVN-75-40
1"	Specify	PVN-100-40
1-1/4"	Specify	PVN-125-40
1-1/2"	Specify	PVN-150-40
2"	Specify	PVN-200-40
3"	Specify	PVN-300-40
3-1/2"	Specify	PVN-350-40
4"	Specify	PVN-400-40
5"	Specify	PVN-500-40
6"	Specify	PVN-600-40

SIZE	LENGTH	CATALOG #
1/2"	Specify	PVN-50-80
3/4"	Specify	PVN-75-80
1"	Specify	PVN-100-80
1-1/4"	Specify	PVN-125-80
1-1/2"	Specify	PVN-150-80
2"	Specify	PVN-200-80
3"	Specify	PVN-300-80
3-1/2"	Specify	PVN-350-80
4"	Specify	PVN-400-80
5"	Specify	PVN-500-80
6"	Specify	PVN-600-80






HDPE PVC Conduit Guide Schedule 40 & 80



- For 1-1/2" thru 8" PVC Conduit
- Makes for faster installation with less labor
- Reusable HDPE for standard cards and Bell End clearance holes in Duct Bank applications

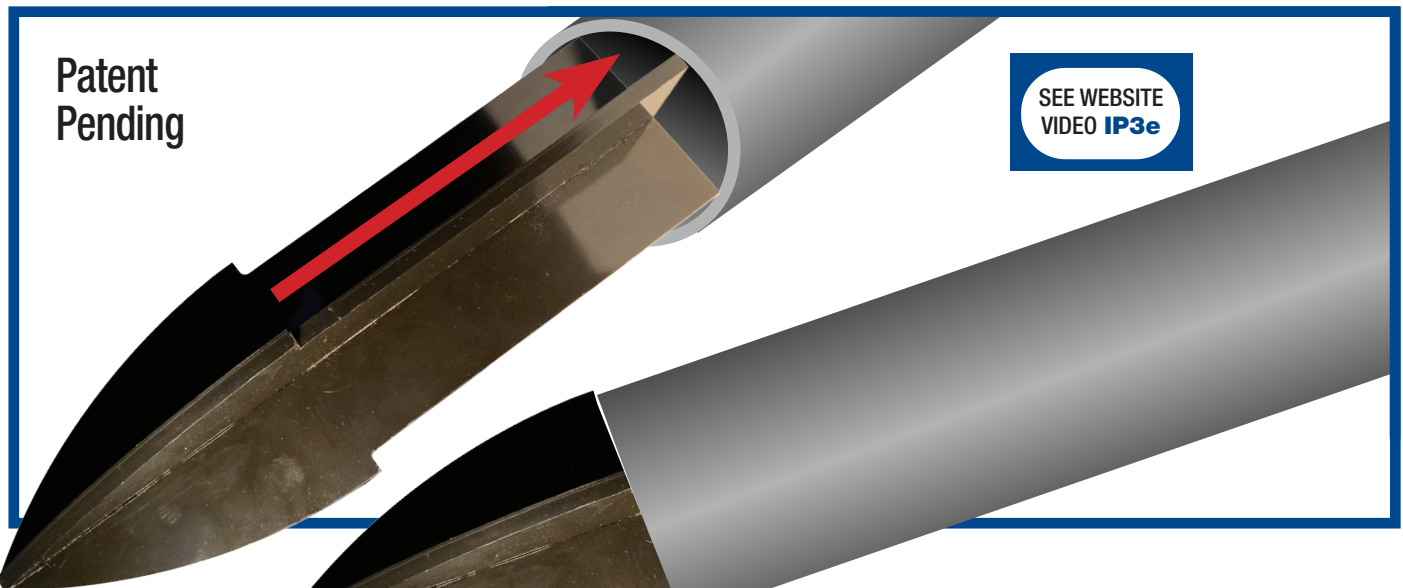


HDPE CONDUIT GUIDE

Standard Hole

(1/4" bigger than outside diameter of conduit)

Catalog #	Size
CG-150	1½ inches
CG-200	2 inches
CG-250	2½ inches
CG-300	3 inches
CG-350	3-1/2 inches
CG-400	4 inches
CG-500	5 inches
CG-600	6 inches
CG-800	8 inches

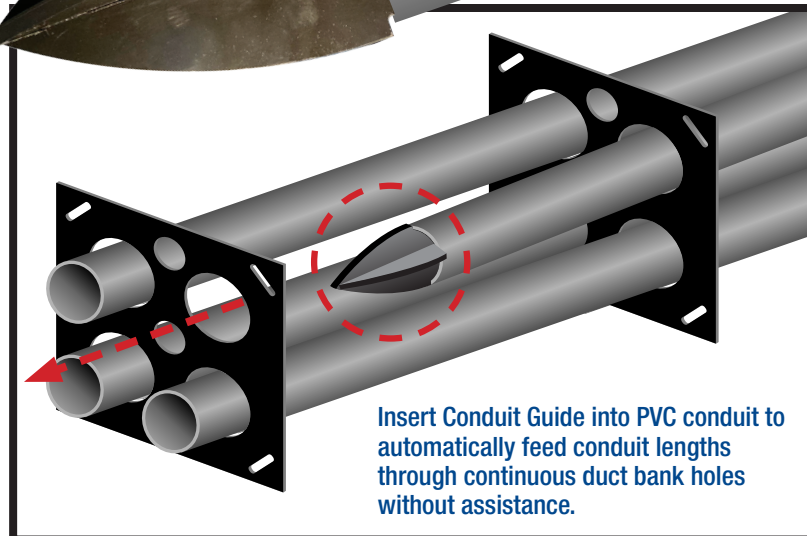

HDPE CONDUIT GUIDE

Oversized End Bell Hole

(clears bell end of conduit)

Catalog #	Size
CG-150-BE	1½ inches
CG-200-BE	2 inches
CG-250-BE	2½ inches
CG-300-BE	3 inches
CG-350-BE	3-1/2 inches
CG-400-BE	4 inches
CG-500-BE	5 inches
CG-600-BE	6 inches
CG-800-BE	8 inches



PATENT PENDING
PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP3e

Long Slip PVC Coupling

Schedule 40 & 80



Patent
Pending

- For 1/2" thru 4" PVC Conduit
- Maintains same inside diameter
- Faster installation with less labor
- Allows longer and more stable support than traditional PVC coupling
- Slip in PVC and glue into one end and slip in and glue into the remaining end to continue conduit run -PVC
- Slip PVC conduits into the Long Slip PVC coupling and glue

SEE WEBSITE
VIDEO **IP3f**



Perfect and more stable for
duct bank applications.



LONG SLIP COUPLING

Catalog #	Size
LS-PVC-75	3/4 inches
LS-PVC-100	1 inches
LS-PVC-125	1 1/4 inches
LS-PVC-150	1 1/2 inches
LS-PVC-200	2 inches
LS-PVC-250	2 1/2 inches
LS-PVC-300	3 inches
LS-PVC-350	3 1/2 inches
LS-PVC-400	4 inches

Perfect and more stable for duct bank applications.



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007

P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595

E: info@spproducts.com • www.spproducts.com

IP3f

Long Slip Bell PVC Coupling to RGD


Schedule 40 & 80



Patent
Pending

SEE WEBSITE
VIDEO **IP3g**

- For 1/2" thru 4" PVC Conduit
- Maintains same inside diameter for both PVC and RGD
- Faster installation with less labor
- More stability than standard coupling
- Slip into and glue PVC into bell end and screw RGD into threaded end
- Eliminates the need for a PVC coupling
- Slip the Long Slip Bell PVC end of coupling onto stubup and transition to RGD

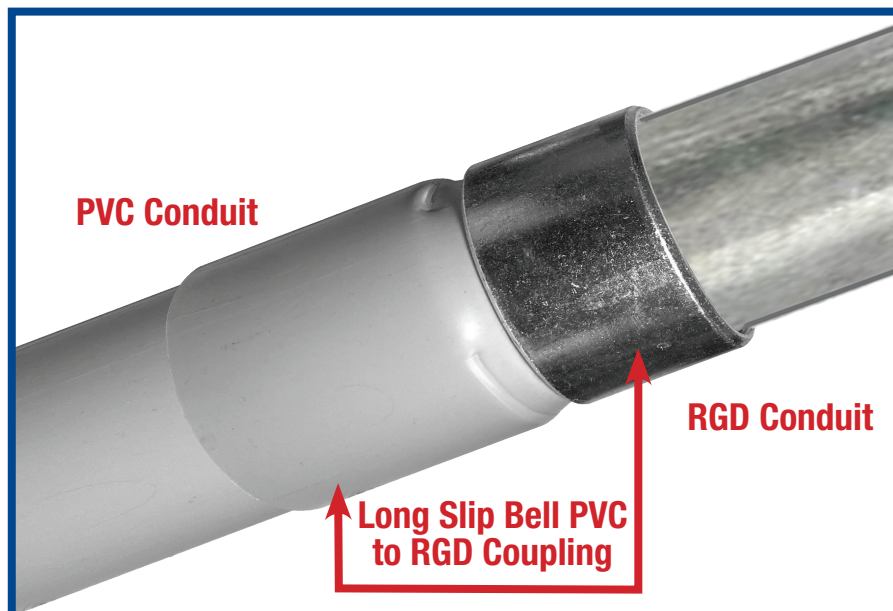

LONG SLIP to RGD

Catalog #	Size
LSB-RGD-75	3/4 inches
LSB-RGD-100	1 inches
LSB-RGD-125	1 1/4 inches
LSB-RGD-150	1 1/2 inches
LSB-RGD-200	2 inches
LSB-RGD-250	2 1/2 inches
LSB-RGD-300	3 inches
LSB-RGD-350	3 1/2 inches
LSB-RGD-400	4 inches

SP PRODUCTS, INC.
Productivity and value thru ideas



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP3g

EZ Raised Bracket for Box Support



- Elevates box 2", 1-5/8" or 7/8" above surface mount
- Provides box support independent of conduit
- Provides support for 4", 4-11/16", 5" and 6" square NEMA boxes
- 4 anchor holes for stable install
- Perfect for mounting on decks, floors and walls
- Works with metal & wooden studs
- Can be used for wall packs on block or brick
- 20 Gauge Galvanized Steel
- Meets buy American Regulations

Place box on top of bracket aligning with 2 - 1/4" holes on center matching 2 - 1/4" holes of box.

Secure bracket to box with 2 - 1/4" bolts.

SEE WEBSITE
VIDEO **IP4**

Patent
Pending

Meets NEC 300.11 (A)
and 323.14 (A & B) Codes

Utilize additional
holes on bracket
legs if used on floor.


Fasten bracket and box
assembly to stud with 1/4"
bolt holes provided on outer
perimeter of bracket.

CAT#	Height
EZRB-200	2"
EZRB-158	1-5/8"
EZRB-78	7/8"



MOUNTING INSTRUCTIONS

Use 2 x 1/4" x 20 bolts on outer holes of EZRB bracket to fasten to stud or secure with nuts and washers or install on floor and secure with screws. Place box on top of bracket and secure with nuts, bolts & washers.

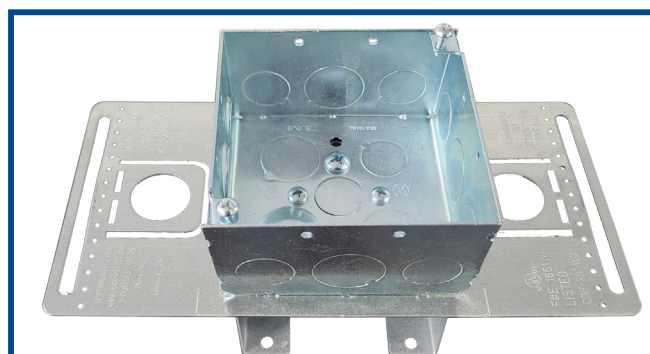

Can be installed using SP support plates
as first means of support for conduit and raceways

SP PRODUCTS, INC
Productivity and value thru ideas



PATENT PENDING
PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP4



"THE ORIGINAL" Box Support Plate

SAVE MORE THAN 30 MINUTES PER INSTALL WITH LESS MATERIAL

Meets NEC 3 Foot Rule From Only One Support

2 Way

Cat#	2-Way Desc.	Wt. Ea.	Qty/Box
CSP-1 (SS)	4" x 12" 16 Gauge Galvanized or Stainless Steel	0.8 lbs.	50

1/4" slots for nuts and bolts to install clamps facing down to support up thru 1 1/4" conduit and flex or equal size MC Cable entering all four sides at any KO location...

or facing up for larger conduit overhead.

ADDITIONAL BENEFITS

1/4" slots to move plate

Install up thru 1/2" threaded rod

Load rating of conduit and box support plates is associated with load rating of box and mounting hardware

Plates also available as complete assemblies with any configuration of components (boxes, connectors, etc.)

**SAVE
MORE THAN
30 MINUTES
PER INSTALL WITH
LESS MATERIAL**

Install larger conduit overhead with our patented 3 conduit threaded block support. Block also sold separately (see IP21a)

Half

Cat#	1/2 Desc.	Wt. Ea.	Qty/Box
CSP-1/2 (SS)	4" x 6" 16 Gauge Galvanized or Stainless Steel	0.4 lbs.	50

C US
PATENTED

SEE WEBSITE
VIDEO **IP5**

For all types of raceways installed per NEC. Accept 4 or 4 11/16 inch square shallow or deep boxes. If shallow (1 1/2 inch deep) Maximum size = 3/4 inch conduit or equal size flexible conduit or MC Cable entering box.

Suitable for 1/4, 3/8 or 1/2 inch rod for support.

C US
PATENTED

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC
Productivity and value thru ideas



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP5-5a

4-WAY BOX SUPPORT

SAVE UP TO 1 HOUR PER INSTALLATION WITH LESS MATERIAL



SEE WEBSITE
VIDEO **IP6**



4 Way

Cat#	4-Way Desc.	Wt. Ea.	Qty/Box
CSP-4W-WC (SS)	9-5/8" x 9-5/8" 18 Gauge Galvanized or Stainless Steel (SS)	0.7 lbs.	25

1

Eliminate center KO clamps for up thru 3/4" Conduit, Flex or equal size MC Cable entering all 4 sides of box at center KO location only. Bend tabs down, feed raceways thru openings to connectors on box. Holes for tek screws are also provided to attach conduit clamps when entering all other KO locations.

2

4 large open KOs in center allow entering back of box with up thru 3/4" raceways to save even more time.

3

Tek screw holes and 1/4" slots for nuts and bolts to install clamps facing down to support up thru 1 1/4" conduit and flex or equal size MC Cable entering all four sides at any KO location... or facing up for larger conduit overhead.

Install up thru 1/2" threaded rod

1/4" slots to move plate

Markings to quickly center & attach box



Use 4-Conduit Block (IP19 or IP20) with QwikBlock (IP21A)

Load rating of conduit and box support plates is associated with load rating of box and mounting hardware



PATENT PENDING
PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP6

2-WAY BOX SUPPORT

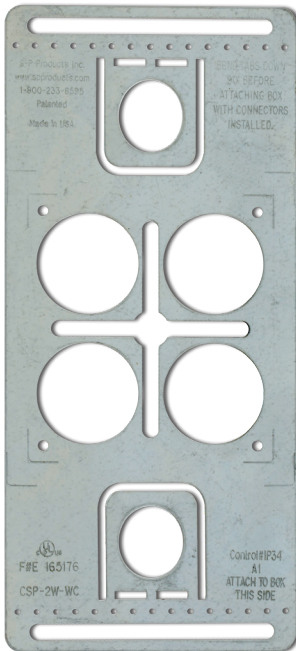

Cat#	2-Way Desc.	Wt. Ea.	Qty/Box
CSP-2W-WC (SS)	4-3/4" x 9-5/8" 18 Gauge Galvanized or Stainless Steel (SS)	0.5 lbs.	50
Cat#	2-Way 1/2 Desc.	Wt. Ea.	Qty/Box
CSP-1/2-WC (SS)	4-3/4" x 4-13/16" 18 Gauge Galvanized or Stainless Steel (SS)	0.25 lbs.	100

Plates also available as complete assemblies with any configuration of components (boxes, connectors, etc.)

**Meets
NEC 3 Foot Rule
From Only
One Support**

Load rating of conduit and box support plates is associated with load rating of box and mounting hardware

Eliminate center KO clamps for up thru 3/4" Conduit, Flex or equal size MC Cable entering all both sides of box at center KO location only.

SEE WEBSITE
VIDEO **IP6a**



Use 4-Conduit Block (IP19 or IP20) with QwikBlock (IP21A)

For all types of raceways installed per NEC.
Accepts 4 or 4^{11/16} & 5" inch square shallow or deep boxes.
If shallow (1 1/2 inch deep) Maximum size = 3/4 inch conduit or equal size flexible conduit or MC Cable entering box.
Suitable for 1/4, 3/8 or 1/2 inch rod for support.

SP PRODUCTS, INC
Productivity and value thru ideas



**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com


IP6a

"ORIGINAL ROUND" Box Support Plate

**SAVE
MORE THAN
30 MINUTES PER
INSTALLATION**



Cat#	4-Way Desc.	Wt. Ea.	Qty/Box
CSPR (SS)	11-3/4" Diameter 20 Gauge Galvanized or Stainless Steel (SS)	1 lb.	25

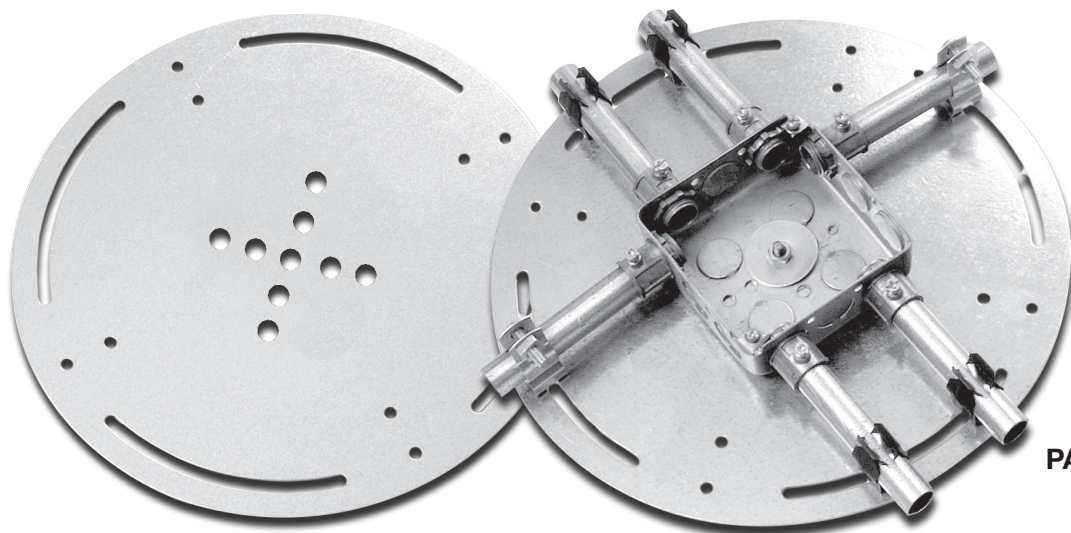

PATENTED


MODIFIED ROUND Box Support Plate

Cat#	4-Way Desc.	Wt. Ea.	Qty/Box
CSPR-4KO (SS)	11-3/4" Diameter 20 Gauge Galvanized or Stainless Steel (SS)	1 lb.	25

4 large open KOs in center allow entering back of box with up thru 3/4" raceways to save even more time.

Plates Suitable for 4, 4-11/16, 5 inch Square Plus up thru 8 x 8 inch Junction Boxes Mounted Either Horizontally or Vertically. 3/32" Holes for Self Tappers and 1/4" Wide Open Slot at Each End Allow Fastening Clamps for Conduit Supports at any KO center.

Assemblies Complete with Box, Connectors, Rod, "Econo-Whips" etc. Attached Available.

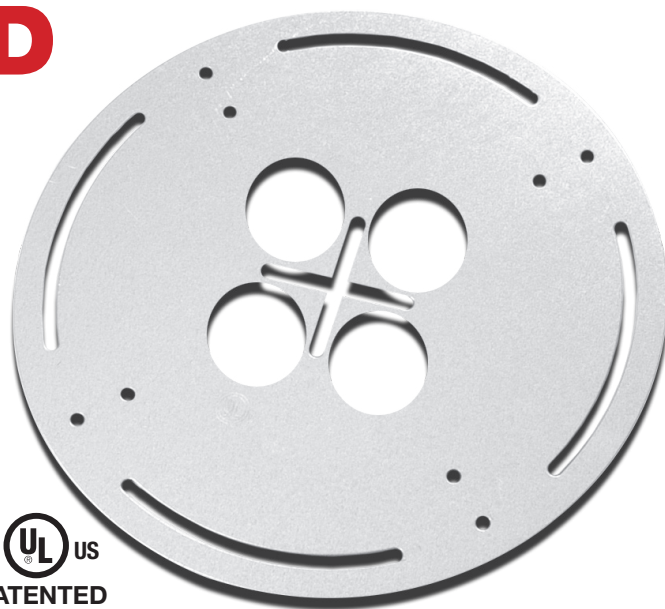

c US
PATENTED

Load rating of conduit and box support plates is associated with load rating of box and mounting hardware

SP PRODUCTS, INC
Productivity and value thru ideas



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP6b

UNIVERSAL ROUND MADE IN USA

Box Support Plate

Cat#	4-Way Desc.	Wt. Ea.	Qty/Box
UCSPR-WC-4KO (SS)	11-3/4" Diameter 20 Gauge Galvanized or Stainless Steel (SS)	1.5 lbs	25

ADDITIONAL BENEFITS

**SAVE
MORE THAN
30 MINUTES PER
INSTALLATION**

1
Eliminates center KO clamps for up thru 3/4" Conduit, Flex or equal size MC Cable entering all 4 sides of box at any KO location. Bend tabs down, feed raceways thru openings to connectors on box.

2
4 large open KOs in center allow entering back of box with up thru 3/4" raceways to save even more time.

3
Tek screw holes and 1/4" slots for nuts and bolts to install clamps facing down to support up thru 1 1/4" conduit and flex or equal size MC Cable entering all four sides at any KO location...or facing up for larger conduit overhead.

• 1/4" slots to position plate if required

• Mount horizontally up thru 1/2" threaded rod

• Markings to quickly center and attach box


• Bend down tabs to mount vertically with up thru 1/2" threaded rod

Install larger conduit overhead with our patented 4 conduit threaded block support. Block also sold separately (see IP19)

Load rating of conduit and box support plates is associated with load rating of box and mounting hardware



Plate also available as a complete assembly with any configuration of components boxes, connectors, etc.

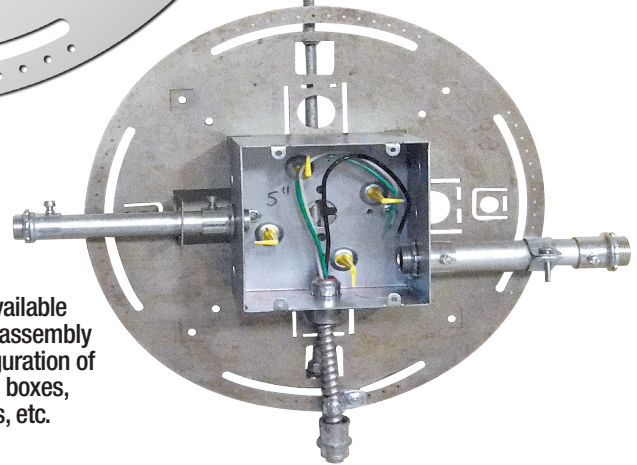

ALL FROM ONLY ONE SUPPORT HORIZONTALLY OR VERTICALLY

For all types of raceways installed per NEC.

Accepts 4, 4 11/16, 5 inch square shallow or deep boxes and 6 x 6 & 8 x 8 inch junction boxes.
If shallow (1 1/2 inch deep) Maximum size = 3/4 inch conduit or equal size flexible conduit or MC Cable entering box. Suitable for 1/4, 3/8 or 1/2 inch rod for support.

SP PRODUCTS, INC
Productivity and value thru ideas



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP6c

2-WAY BOX SUPPORT PLATES with FINGERS




SEE WEBSITE
VIDEO **IP6d**

**SAVE OVER
HALF HOUR
PER INSTALL WITH
LESS MATERIAL**

Cat#	2-Way Desc.	Wt. Ea.	Qty/Box
CSPV-2W-FC (SS)	5" x 11-1/2" 18 Gauge Galvanized or Stainless Steel (SS)	0.5 lbs.	50
Cat#	2-Way 1/2 Desc.	Wt. Ea.	Qty/Box
CSPV-1W-FC (SS)	5" x 5-3/4" 18 Gauge Galvanized or Stainless Steel (SS)	0.25 lbs.	100

2 Way

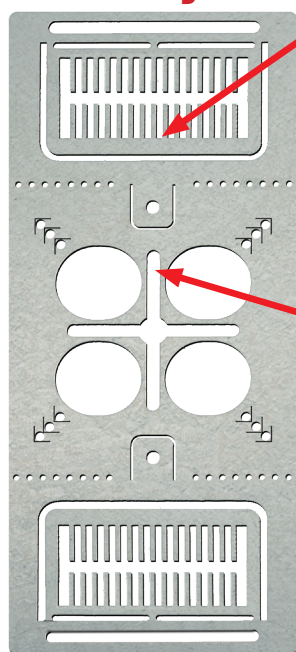

**18 Gauge Galvanized
or Stainless Steel**

1

For vertical application bend 2 smaller tabs out and insert 1/4", 3/8" or 1/2" rod secured with nuts for vertical support.




2


OR insert rod in fixed hole of plate and secure with Qwik Block (IP21a) to automatically center with either a 1/4" or 3/8" threaded rod with punching a center KO on top of box.

**Use 4-Conduit Block
(IP19 or IP20)
with QwikBlock
(IP21A)**

2 Way-Half



**18 Gauge Galvanized
or Stainless Steel**

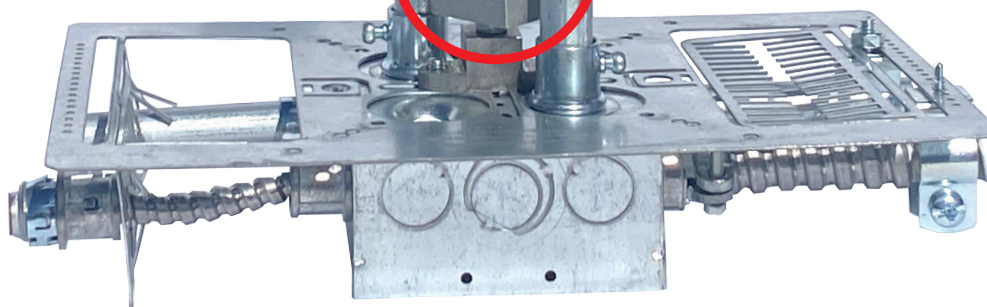

Load rating of conduit and box support plates is associated with load rating of box and mounting hardware.

Fingers eliminate all clamps for up thru 1 1/4" conduit, flex or equal size MC Cable entering any KO location 1 or 2 sides of box.

Plates also available as a complete assembly with any configuration of components boxes, connectors, etc.

For all types of raceways installed per NEC.

Accept 4, 4 11/16, 5 inch square shallow or deep boxes. If shallow (1 1/2 inch deep)
Maximum size = 3/4 inch conduit or equal size flexible conduit or MC Cable entering box.

Suitable for 1/4, 3/8 or 1/2 inch rod for application.

SP PRODUCTS, INC
Productivity and value thru ideas



**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com


IP6d

4-WAY BOX SUPPORT PLATE with Split Fingers for Horizontal or Vertical Installation




SEE WEBSITE
VIDEO **IP7**

SAVE OVER
1 HOUR
PER INSTALL
WITH LESS
MATERIAL

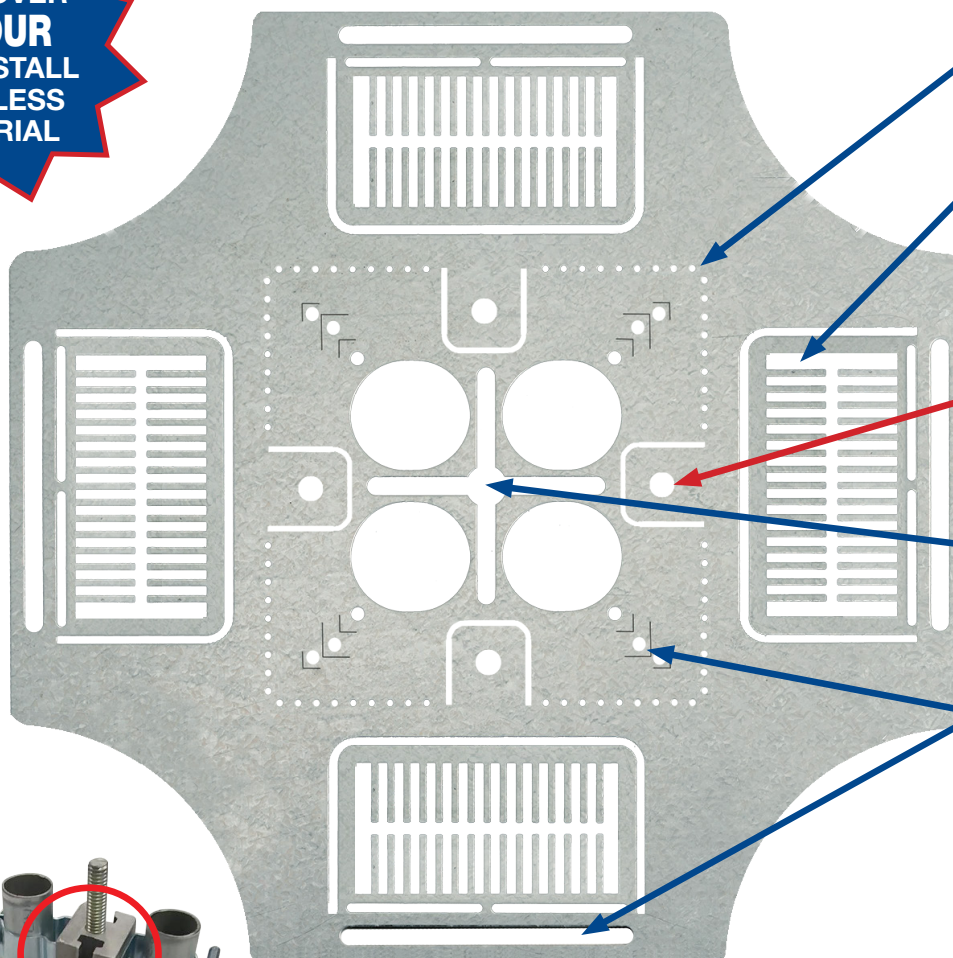

- 1** Used with 4", 4 1/2" or 5" square outlet plus 6 x 6 and 8 x 8 junction boxes.
- 2** Eliminates ALL conduit clamps. Bend large tabs with split fingers out and feed up thru 1 1/4" conduit or equal O.D. McCable into box at any KO location on all 4 sides of box.
- 3** Bend 4 smaller tabs out and insert 1/4", 3/8", or 1/2" rod secured with nuts for vertical support.
- 4** OR insert rod in fixed center hole of plate and also secure with our QWIK BLOCK (IP21a) for horizontal support.
- 5** 1/4" slots for fastening conduit clamps to plate with nuts and bolts plus holes for TEK screws if required. 1/4" slots and TEK screw holes allow conduit for other systems to be supported above the plate for even greater savings!

US PATENT PENDING

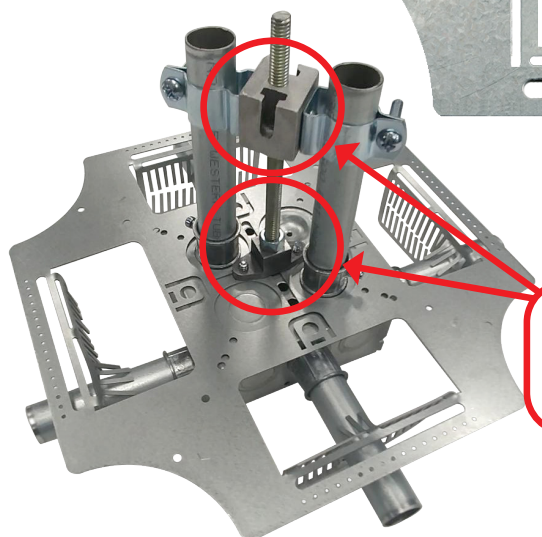

Use 4-Conduit Block
(IP19 or IP20)
with QwikBlock
(IP21A)

Cat#	2-Way Desc.	Wt. Ea.	Qty/Box
CSPV-4W-FC (SS)	11-1/2" x 11-1/2" 18 Gauge Galvanized or Stainless Steel (SS)	0.75 lbs.	25

SP PRODUCTS, INC.
Productivity and value thru ideas



**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP7

SEE WEBSITE
VIDEO **IP8**

Junction Box Support Plates

20" x 20" Supports Up Thru 12" x 12" J Box
28" x 28" Supports Up Thru 20" x 20" J Box

**Mount Horizontally or Vertically
from 1 single support**




Bend down four tabs at centers of outer edges to accept up thru 1/2" rod for vertical installation.

Drill hole in center of back of box to allow attaching single support through open cross on 20 x 20 plate to mount horizontally.

4 open KO's in center of plate allow conduit or MC Cable to enter and leave back of box.

Load rating of conduit and box support plates is associated with load rating of box and mounting hardware

20 x 20 Plate installed horizontally by one single support from ceiling eliminating additional supports for box and conduits entering box.

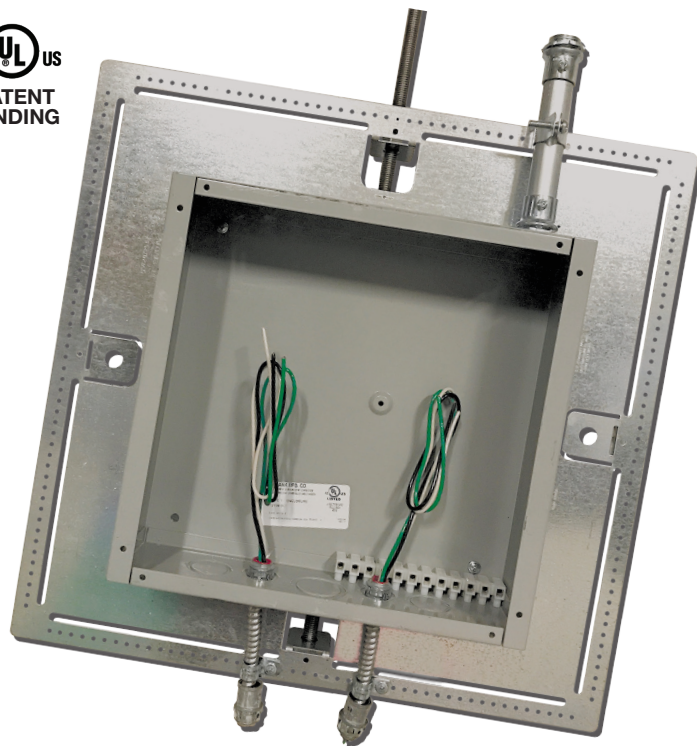

Cat#	Desc.	Wt. Ea.	Qty/Box
CSP20x20	20" x 20" 16 Gauge Galvanized or Stainless Steel (SS)	7.3 lbs	8
CSP28x28	28" x 28" 16 Gauge Galvanized or Stainless Steel (SS)	14 lbs	Any Qty.

- 1/4" Slots & Tek screw holes provided to install clamps at any location
- Other Dimensions for Smaller/Larger Boxes available, Consult Factory

SP PRODUCTS, INC
Productivity and value thru ideas



**PATENT PENDING
PATENTED**



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP8


Grid-System Box Support Plate



**For Medical Centers, Hospital Rooms Requiring Power
& Lighting, Emergency Power, & Alarms**

**SAVE OVER
2 HOURS
Per Installation**

Cat#	Desc.	Wt. Ea,	Qty/Box
CSPDualJB	19-1/2" x 19-1/2" 16 Gauge Galvanized or Stainless Steel (SS)	7.3 lbs	Any Qty.

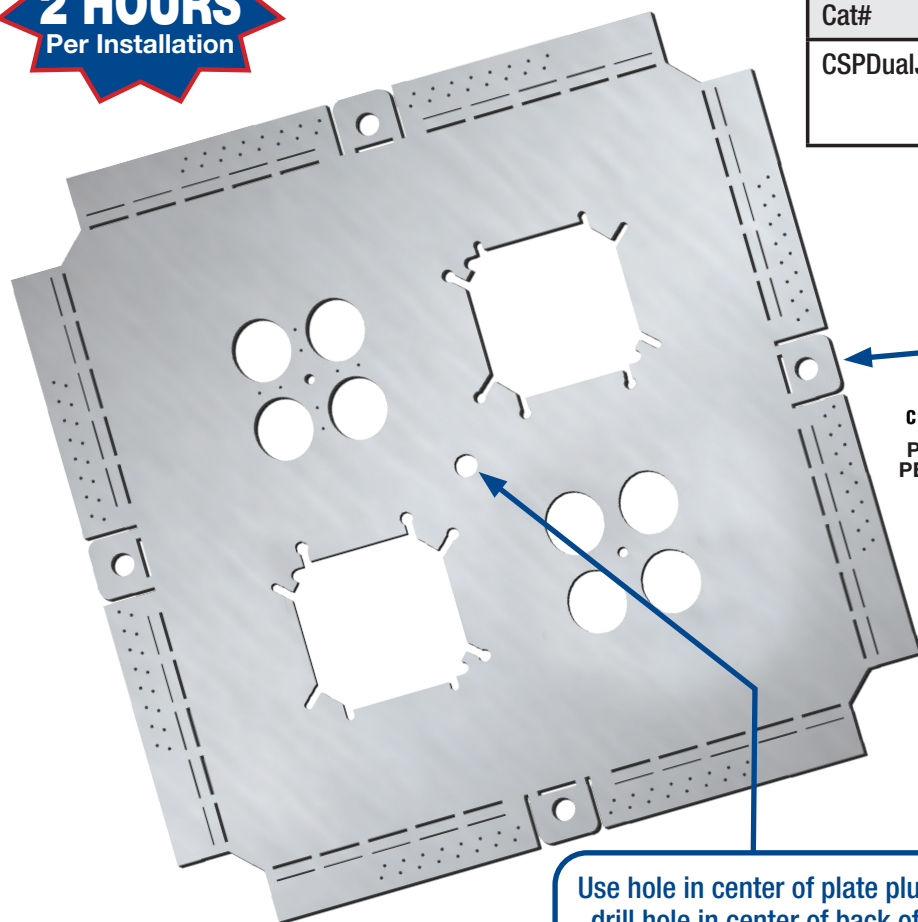


Load rating of conduit and box support plates is associated with load rating of box and mounting hardware

Use hole in center of plate plus drill hole in center of back of junction box to allow mounting plates horizontally.



For vertical mounting bend tabs back on reverse side and support with up thru 1/2" rod

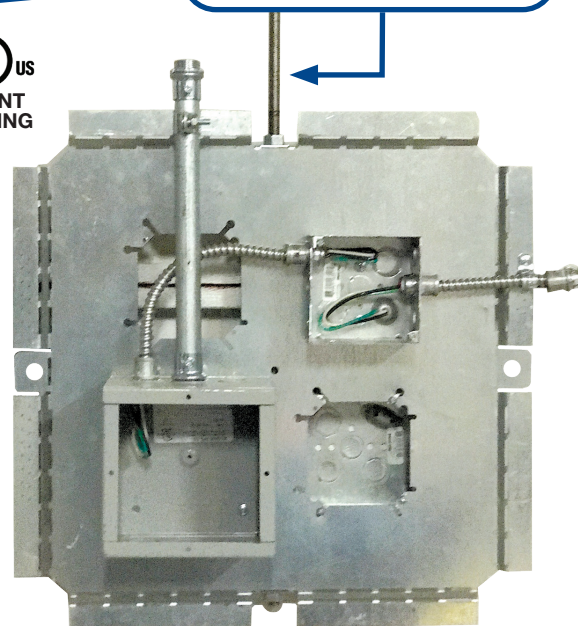

Vertical Installation Shown

Mount Horizontally or Vertically from 1 single support

- Accepts 4", 4¹¹/₁₆", & 5" square boxes up thru 12" x 12" junction boxes.
- Mount two or more systems on same plate without cable and boxes interfering with each other.
- Allows faster, easier trouble shooting and organizing systems on jobs.
- 4 Large elliptical holes allow lining up box & plate for fast easy access in/out back of the box.
- Mount boxes above & below the plate when is installed horizontally.

SP PRODUCTS, INC
Productivity and value thru ideas



**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP8a

Nylon Wrap-Around Conduit Straps



Quickly & Firmly Secure Conduit in Seconds



SEE WEBSITE
VIDEO **IP9**

- No Tools Required
- Flame Retardant
- Up Thru 950 lb Load Ratings
- **Plenum Rated Up Thru 1½" Size**

CAT #	ELECTRICAL			Max Load lbs.
	EMT	Heavy Wall	IMC	
SPP-12-16P	N/A	N/A	N/A	170
SPP-17-20P	1/2" (.706)	N/A	N/A	195
SPP-21-24P	3/4" (.922)	1/2" (.840)	1/2" (.815)	215
SPP-25-29P	N/A	3/4" (1.050)	3/4" (1.029)	315
SPP-30-34P	1" (1.163)	1" (1.315)	1" (1.290)	320
SPP-35-38P	1-1/4" (1.510)	N/A	N/A	342

CAT #	ELECTRICAL			Max Load lbs.
	EMT	Heavy Wall	IMC	
SPP-40-44P	1-1/2" (1.740)	1-1/4" (1.660)	1-1/4" (1.638)	365
SPP-48-54P	N/A	1-1/2" (1.900)	1-1/2" (1.883)	380
SPP-56-63P	2" (2.197)	2" (2.375)	2" (2.360)	410
SPP-66-76P	2-1/2" (2.875)	2-1/2" (2.875)	2-1/2" (2.857)	500
SPP-79-93P	3" (3.500)	3" (3.500)	3" (3.476)	600
SPP-101-115P	3½ & 4" (4.500)	4" (4.500)	4" (4.466)	950

NOTE: Fractional numbers reflect nominal pipe diameter, decimal numbers actual O.D. in inches.

Also Ideal for HVAC, Plumbing & Mechanical Installations



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS **ONLY WHERE SHOWN ABOVE**



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP9

EZ Stub-Up SUPPORT BRACKET



NEW


Patent
Pending

Uni-strut can be
used to support multiple
conduit placement


SEE WEBSITE
VIDEO **IP10**

Fasten
brackets
to deck


16 guage galvanized steel
SUITABLE FOR 1/2" thru 1-1/4"
PVC SCH 40/80 Stub-Ups

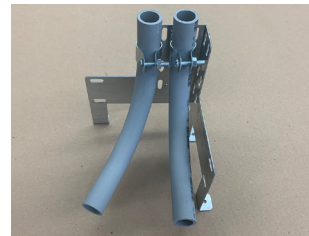


Multiple Conduit Minnies

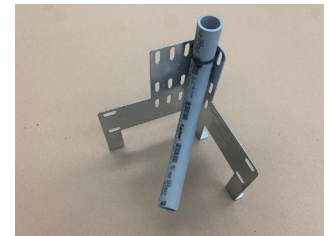

Ty Wrap Single Application

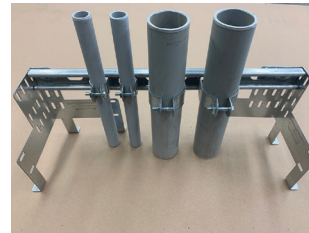


Multiple Conduit Sleeves
on Strut with Strut Straps

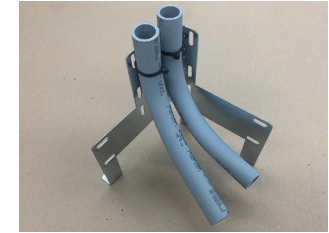

Ty Wrap Multiple Application



HDPE Application

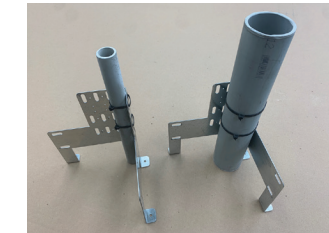

Single Conduit Sleeves


Cat#	Desc.
EZ-STUB-50-125	Supports 1/2" thru 1-1/4" PVC Conduit

Use nylon wrap around conduit straps, minerllacs, one-hole straps or Ty wraps to secure conduit to bracket or uni-strut

Nylon Wrap Around
Conduit Strap (IP10)
to secure conduit
to Uni-Strut

Conduit Clamps
can be also used to
secure conduit to
Uni-Strut

Strut Straps
can be used to secure
conduit to Uni-Strut

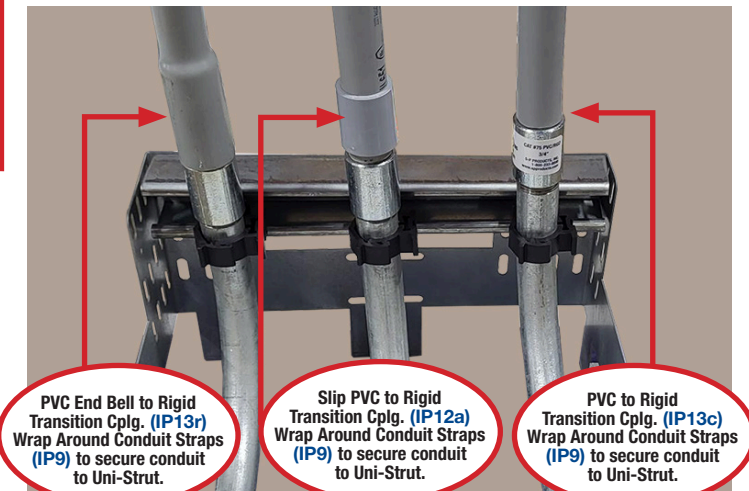

PVC End Bell to Rigid
Transition Cplg. (IP13r)
Wrap Around Conduit Straps
(IP9) to secure conduit
to Uni-Strut.

Slip PVC to Rigid
Transition Cplg. (IP12a)
Wrap Around Conduit Straps
(IP9) to secure conduit
to Uni-Strut.

PVC to Rigid
Transition Cplg. (IP13c)
Wrap Around Conduit Straps
(IP9) to secure conduit
to Uni-Strut.

Perfect for Poured Precast Decks!

SP PRODUCTS, INC
Productivity and value thru ideas



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP10



Trapeze Brackets



**Eliminates 5 Conduit Clamps per Foot
PLUS Support Rods, Conduit Straps, etc.**


SEE WEBSITE
VIDEO IP11

- For 1/4" or 3/8" Threaded Rod.
- Meets UL 2239 & CSA C22.2 No.18.4

- Galvanized or Stainless Steel
(plus other gauges available)

Original Feed Thru 5 Conduits per foot

Plastic Bushings for pulling LV, MC Cable, etc. must be UL Listed to maintain UL Listing when installed in the field or SP factory.

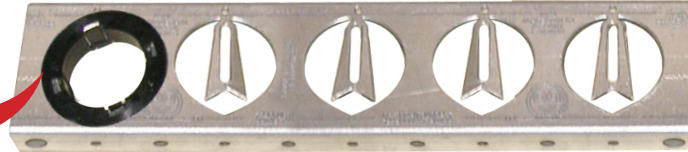

- 1 foot thru 6 foot pieces
- Order in 1 ft. increments
- 5 openings per foot spaced 2 1/4" on center

Original EZUTB – Size 1/2" thru 1 1/4" Conduit or equal size MC Cable

Trapeze Brackets Wt. 0.56 lbs per foot 1/2" thru 1-1/4"	
Size	5 Conduits Catalog #
12"	EZUTB12-16GS (SS)
24"	EZUTB24-16GS (SS)
36"	EZUTB36-16GS (SS)
48"	EZUTB48-16GS (SS)
60"	EZUTB60-16GS (SS)
72"	EZUTB72-16GS (SS)
16GS = 16 Gauge Galvanized Steel (SS) = 302 Stainless Steel	

Feed Thru 6 Conduits per foot



- Accomodates maximum number of 1/2" or 1" Conduit or equal size MC Cable to fit the width of the panel can.
- Maximizes straight runs and minimizes the 90° installations

Trapeze Brackets Wt. 0.56 lbs per foot 1/2" thru 1"	
Size	6 Conduits Catalog #
12"	EZUTB75/100-12-16GS (SS)
24"	EZUTB75/100-24-16GS (SS)
36"	EZUTB75/100-36-16GS (SS)
48"	EZUTB75/100-48-16GS (SS)
60"	EZUTB75/100-60-16GS (SS)
72"	EZUTB75/100-72-16GS (SS)
16GS = 16 Gauge Galvanized Steel (SS) = 302 Stainless Steel	

Feed Thru 8 or 4 Conduits per foot



- Accomodates maximum number of 1/2" or 2" Conduit or equal size MC Cable.

Trapeze Brackets 1/2" thru 2"	
Size	4 Conduits Catalog #
12"	EZUTB200-12-14GS
Size	8 Conduits Catalog #
24"	EZUTB200-24-14GS
14GS = 14 Gauge Galvanized Steel	

SP PRODUCTS, INC
Productivity and value thru ideas



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com


IP11

383 lb
Load Rating


Trapeze Brackets




Stack Overhead in Tight Areas




Vertical on Walls



on Decks

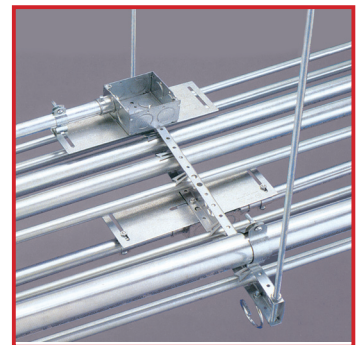

Attach Conduit/Box Support
Plates Above & Below Conduit

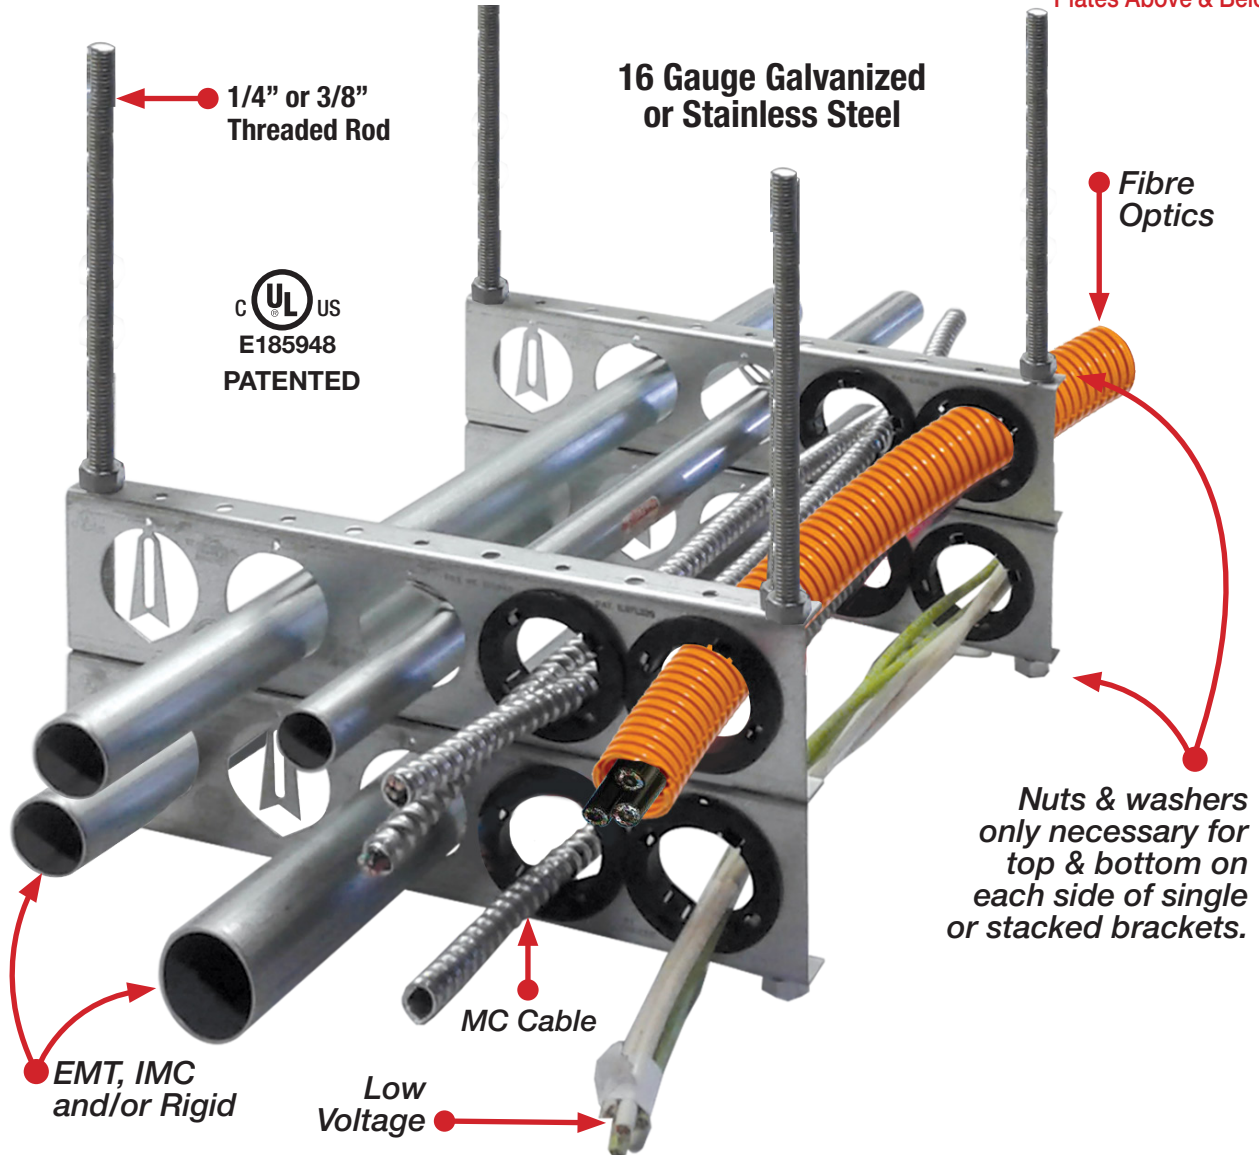

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC
Productivity and value thru ideas



**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP11a

Custom Trapeze Brackets Lay-In...

Example: for 4" EMT Li
EZUTB 4-4, and EMT Li

PATENTED




Centered captive
capped bolts hold
conduit in place



or Feed Thru

Example: 4 – Four Inch Conduits
EZUTB 4-4 EMT

PATENT
PENDING

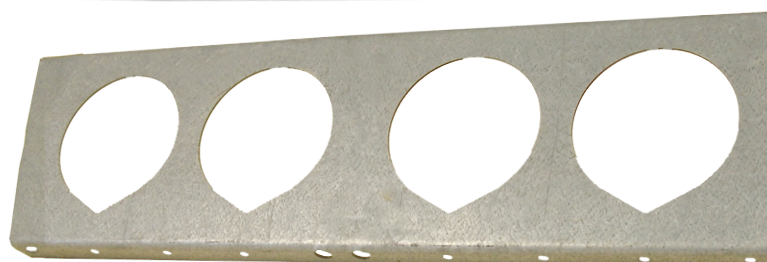

*Available in Any Gauge Galvanized or Stainless Steel and
Any Size Conduit or Configuration. Consult Factory.*

or Customized!



Tell Us What You Need... We'll Make It!

Customer must satisfy all codes and owners' specifications.



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE




730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP11b

Wide Bottom Flange Trapeze Bracket



Allows Drill Chuck Clearance When Installing Vertically on Walls or Horizontally on Decks.

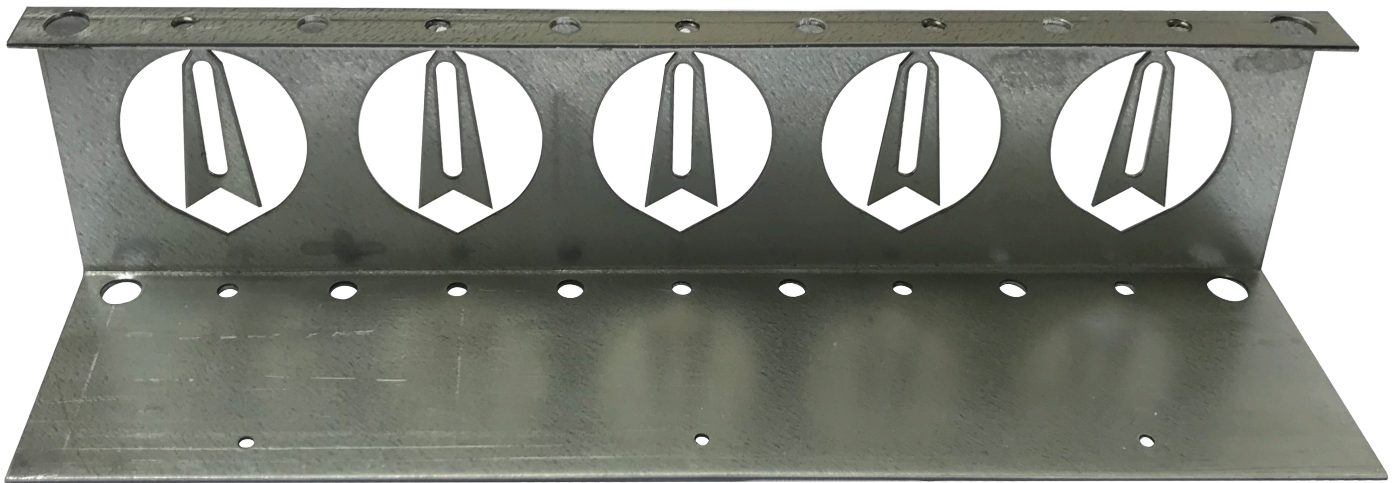

**1-3/4" taller version for
conduit clearance from deck.**

Consult factory for price and availability.

Cat#	4-Way Desc.	Wt. Ea.	Qty/Box
EZUTB(Length)-WF	16 Gauge Galvanized or Stainless Steel (SS)	0.7 lbs.	25

Customer must satisfy all codes and owners' specifications.



**PATENT PENDING
PATENTED**




LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com


IP11c

Split Steel Nuts

Save valuable time placing the nut at desired position
instead of spinning the nut up long lengths of
threaded rod to final location.

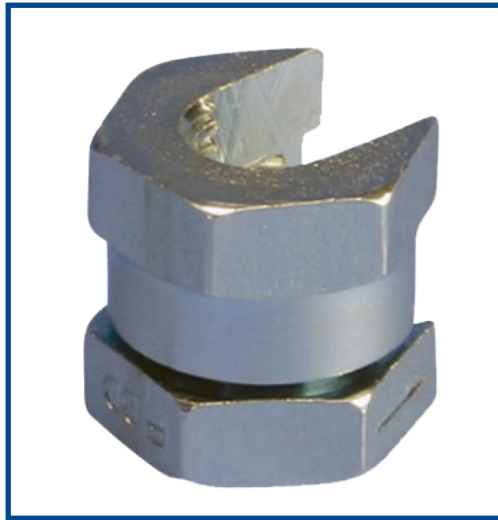

Cat#	Desc.
SN25	1/4"
SN38	3/8"
SN50	1/2"

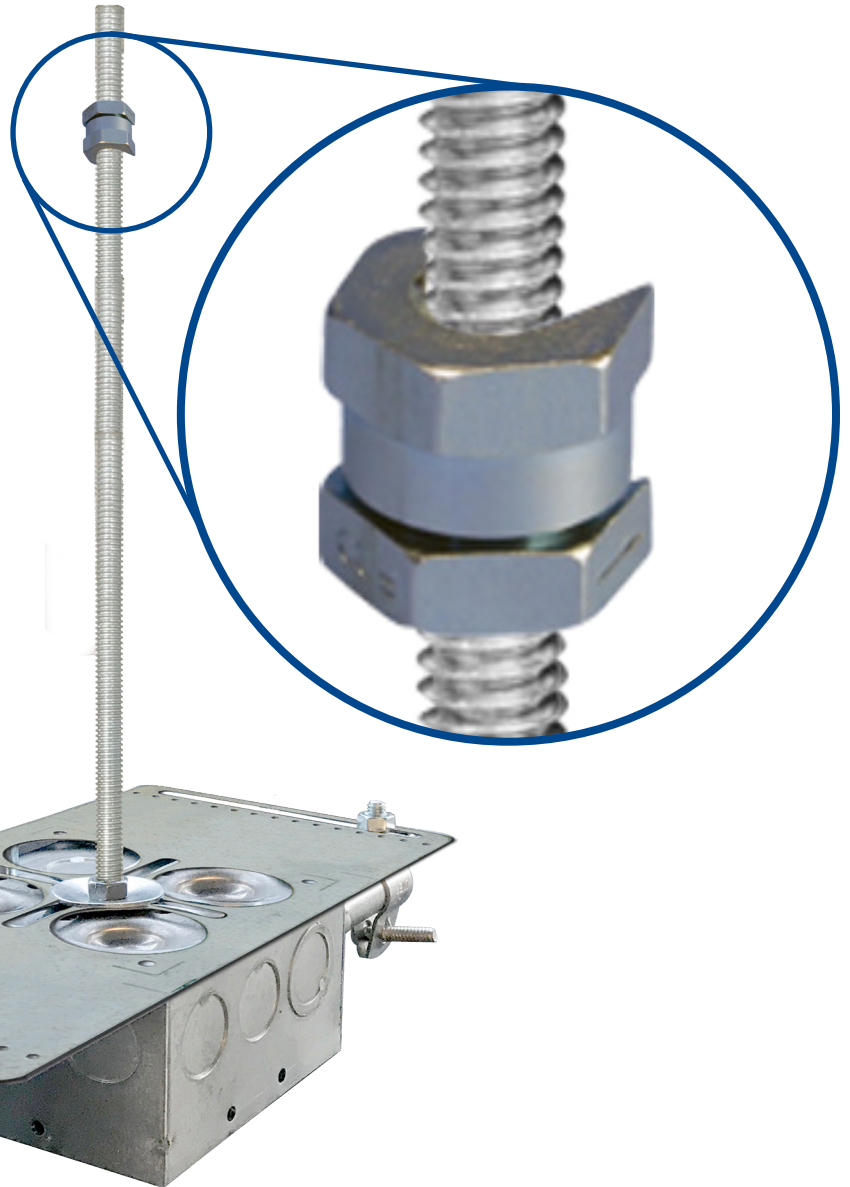

SP PRODUCTS, INC.
Productivity and value thru ideas



PATENT PENDING
PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP11d




Transition Slip Couplings



PVC CONDUIT SCH 40 & 80 NO REAMING TOOL REQUIRED!



PATENTED

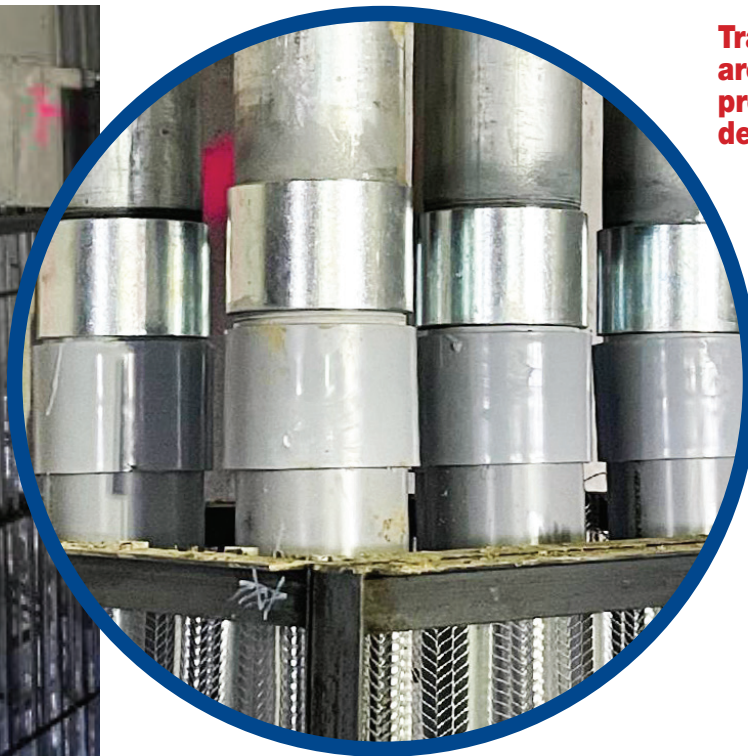

Transition Slip Couplings are ideal for all types of projects plus save a great deal of money:

- Waste Water Treatment Plants
- Food Processing Plants
- Data Centers
- Hospitals
- Stadiums
- Expo Centers
- Light Rail
- Military Facilities
- Airports
- Museums

**Use On
Entire Job
Not Just
For Repair!**

EXAMPLE: PVC TO GALVANIZED RIGID APPLICATION

Customer must satisfy all codes and owners' specifications.



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP12



SEE WEBSITE
VIDEO **IP12a**

Slip PVC Transition Couplings to Galvanized Rigid PVC Schedule 40 & 80

**NO
REAMING TOOL
REQUIRED**

Save
at Least
1 Hour per
Installation.



**Transitions into
Standard PVC Coupling**

**Save Cost on the Rigid
Nipple, Tape & Labor**

**Use for Entire Job -
Not Just for Repair**

**Apply PVC Cement
to Secure & Complete**



See Our
Conduit Plug
See page IP27c

1/2" thru 6"


Transition Couplings

Size	Catalog #
1/2"	50 SLIP/RGD
3/4"	75 SLIP/RGD
1"	100 SLIP/RGD
1-1/4"	125 SLIP/RGD
1-1/2"	150 SLIP/RGD
2"	200 SLIP/RGD
2-1/2"	250 SLIP/RGD
3"	300 SLIP/RGD
3-1/2"	350 SLIP/RGD
4"	400 SLIP/RGD
5"	500 SLIP/RGD
6"	600 SLIP/RGD

UL US
PATENTED


Step 1

Install PVC Coupling
on Conduit or Stub-up
Flush or Just Below
Grade and Cap with
(Conduit Plug IP27c)
or Tape Prior to Pour




Step 2

Glue
Slip RGD
Coupling



Step 3

Attach
GRC Conduit to
Slip RGD
Coupling

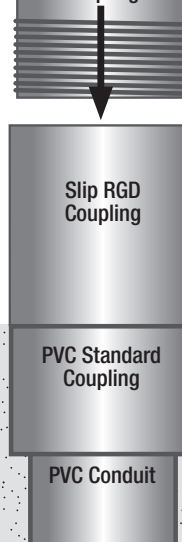

All SP Products Inc. Transition Fittings
are manufactured for installation to
either meet or exceed in accordance with
NEMA TC2, TC3 or UL 651 specifications

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC
Productivity and value thru ideas



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP12a

Slip PVC Transition Couplings to Flexible Conduit



**NO
REAMING TOOL
REQUIRED**

PVC Schedule 40 & 80

**Save
at Least
1 Hour per
Installation.**



**Transitions into
PVC Standard Coupling**

**Save Cost on the Rigid
Nipple, Tape & Labor**

**Use for Entire Job -
Not Just for Repair**

**Apply PVC Cement
to Secure & Complete**

See Our
Conduit Plug
See page IP27c





SEE WEBSITE
VIDEO **IP12b**

c **US**
PATENTED

Step 1

Install PVC Coupling
on Conduit or Stub-up
Flush or Just Below
Grade and Cap with
(Conduit Plug IP27c) or
Tape Prior to Pour




PVC Standard
Coupling

PVC Conduit

Concrete

Step 3

Attach
FLEX Conduit to
Slip FLEX
Coupling



PVC Standard
Coupling

PVC Conduit

1/2" thru 1-1/2"

Transition Couplings

Size	Catalog #
1/2"	50 SLIP/FLEX
3/4"	75 SLIP/FLEX
1"	100 SLIP/FLEX
1-1/4"	125 SLIP/FLEX
1-1/2"	150 SLIP/FLEX

All SP Products Inc. Transition
Fittings are manufactured for
installation to either meet or
exceed in accordance with NEMA
TC2, TC3 or UL 651 specifications

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC
Productivity and value thru ideas



**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP12b



Slip PVC Transition Couplings to Liquidtite PVC Schedule 40 & 80

**NO
REAMING TOOL
REQUIRED**

**Save
at Least
1 Hour per
Installation.**



c **US**
PATENTED

**Transitions into
Standard PVC Coupling**

**Save Cost on the Rigid
Nipple, Tape & Labor**

**Use for Entire Job -
Not Just for Repair**

**Apply PVC Cement
to Secure & Complete**


SEE WEBSITE
VIDEO **IP12c**

See Our
Conduit Plug
See page IP27c



Step 3

Attach Liquidtite Conduit to
Slip Liquidtite Coupling



1/2" thru 4"

Transition Couplings

Size	Catalog #
1/2"	50 SLIP/LIQ
3/4"	75 SLIP/LIQ
1"	100 SLIP/LIQ
1-1/4"	125 SLIP/LIQ
1-1/2"	150 SLIP/LIQ
2"	200 SLIP/LIQ
2-1/2"	250 SLIP/LIQ
3"	300 SLIP/LIQ
3-1/2"	350 SLIP/LIQ
4"	400 SLIP/LIQ

All SP Products Inc. Transition Fittings
are manufactured for installation to
either meet or exceed in accordance with
NEMA TC2, TC3 or UL 651 specifications

Step 1
Install PVC Coupling
on Conduit or Stub-up
Flush or Just Below
Grade and Cap with
(Conduit Plug IP27c) or
Tape Prior to Pour



PVC Standard
Coupling




PVC Conduit



PVC Conduit

Step 2

Glue
Slip Liquidtite
Coupling

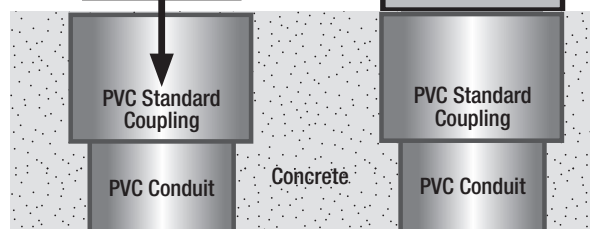

PVC Standard
Coupling

PVC Conduit

Concrete

PVC Standard
Coupling

PVC Conduit

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC.
Productivity and value thru ideas



**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP12c

Slip PVC Transition Couplings to Aluminum PVC Schedule 40 & 80



**NO
REAMING TOOL
REQUIRED**

**Save
at Least
1 Hour per
Installation.**



**Transitions into
Standard PVC Coupling**

**Save Cost on the Rigid
Nipple, Tape & Labor**

**Use for Entire Job -
Not Just for Repair**

**Apply PVC Cement
to Secure & Complete**

SEE WEBSITE
VIDEO **IP12d**

See Our
Conduit Plug
See page IP27c




1/2" thru 6"




Transition Couplings

Size	Catalog #
1/2"	50 SLIP/ALUM
3/4"	75 SLIP/ALUM
1"	100 SLIP/ALUM
1-1/4"	125 SLIP/ALUM
1-1/2"	150 SLIP/ALUM
2"	200 SLIP/ALUM
2-1/2"	250 SLIP/ALUM
3"	300 SLIP/ALUM
3-1/2"	350 SLIP/ALUM
4"	400 SLIP/ALUM
5"	500 SLIP/ALUM
6"	600 SLIP/ALUM

Step 1
Install PVC Coupling
on Conduit or Stub-up
Flush or Just Below
Grade and Cap with
(Conduit Plug IP27c) or
Tape Prior to Pour



UL US
PATENTED

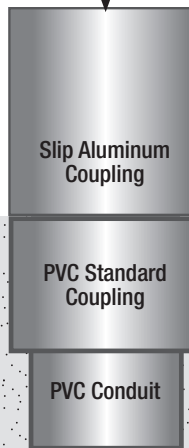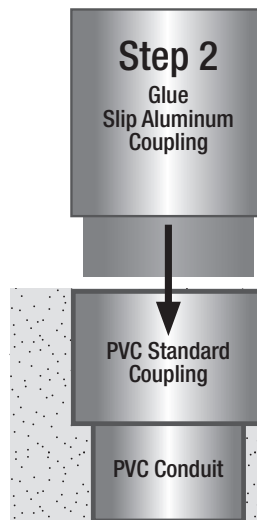

All SP Products Inc. Transition Fittings
are manufactured for installation to
either meet or exceed in accordance
with NEMA TC2, TC3 or UL 651
specifications

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC.
Productivity and value thru ideas



**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP12d

Slip PVC Transition Couplings to EMT

PVC Schedule 40 & 80



**NO
REAMING TOOL
REQUIRED**

**Save
at Least
1 Hour per
Installation.**

SEE WEBSITE
VIDEO **IP12e**

See Our
Conduit Plug
See page IP27c



**Transitions into
Standard PVC Coupling**


**Save Cost on the Rigid
Nipple, Tape & Labor**

**Use for Entire Job -
Not Just for Repair**

**Apply PVC Cement
to Secure & Complete**

1/2" thru 4"

UL US
PATENTED

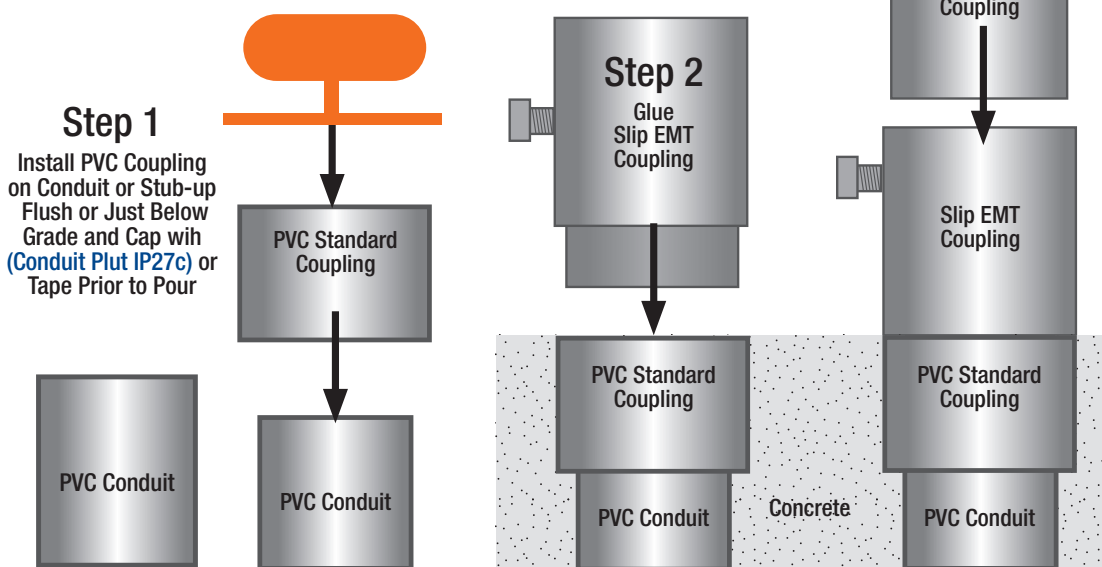

Transition Couplings

Size	Catalog #
1/2"	50 SLIP/EMT
3/4"	75 SLIP/EMT
1"	100 SLIP/EMT
1-1/4"	125 SLIP/EMT
1-1/2"	150 SLIP/EMT
2"	200 SLIP/EMT
2-1/2"	250 SLIP/EMT
3"	300 SLIP/EMT
3-1/2"	350 SLIP/EMT
4"	400 SLIP/EMT

All SP Products Inc. Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC.
Productivity and value thru ideas



**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP12e

Slip PVC Transition Couplings to Stainless Steel

PVC Schedule 40 & 80



Save
at Least
1 Hour per
Installation.

**NO
REAMING TOOL
REQUIRED**

SEE WEBSITE
VIDEO **IP12f**

**Transitions into
PVC Standard Coupling**

**Save Cost on the Rigid
Nipple, Tape & Labor**

**Use for Entire Job -
Not Just for Repair**

**Apply PVC Cement
to Secure & Complete**

See Our
Conduit Plug
See page IP27c



UL ^{US}
PATENTED

Step 1

Install PVC Coupling
on Conduit or Stub-up
Flush or Just Below
Grade and Cap with
(Conduit Plug IP27c) or
Tape Prior to Pour



PVC Standard
Coupling

PVC Conduit

Step 2

Glue
Slip Stainless Steel
Coupling

PVC Standard
Coupling

PVC Conduit

Concrete

Step 3

Attach
Stainless Steel
Conduit to Slip
Stainless Steel
Coupling

Slip Stainless Steel
Coupling

PVC Standard
Coupling

PVC Conduit

1/2" thru 4"

Transition Couplings

Size	Catalog #
1/2"	50 SLIP/SS
3/4"	75 SLIP/SS
1"	100 SLIP/SS
1-1/4"	125 SLIP/SS
1-1/2"	150 SLIP/SS
2"	200 SLIP/SS
2-1/2"	250 SLIP/SS
3"	300 SLIP/SS
3-1/2"	350 SLIP/SS
4"	400 SLIP/SS

All SP Products Inc. Transition
Fittings are manufactured for
installation to either meet or
exceed in accordance with
NEMA TC2, TC3 or UL 651
specifications

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC
Productivity and value thru ideas



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP12f

Slip PVC Transition Couplings to End Bell



**NO
REAMING TOOL
REQUIRED**

PVC Schedule 40 & 80

**Save
at Least
1 Hour per
Installation.**

**Transitions into
Standard PVC Coupling**

**Save Cost on the Rigid
Nipple, Tape & Labor**

**Use for Entire Job -
Not Just for Repair**

**Apply PVC Cement to
Secure & Complete**

SEE WEBSITE
VIDEO **IP12g**

See Our
Conduit Plug
See page IP27c



**cUL[®] US
PATENTED**


1/2" thru 6"

Transition Couplings

Size	Catalog #
1/2"	50 SLIP/EB
3/4"	75 SLIP/EB
1"	100 SLIP/EB
1-1/4"	125 SLIP/EB
1-1/2"	150 SLIP/EB
2"	200 SLIP/EB
2-1/2"	250 SLIP/EB
3"	300 SLIP/EB
3-1/2"	350 SLIP/EB
4"	400 SLIP/EB
5"	500 SLIP/EB
6"	600 SLIP/EB


All SP Products Inc. Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications

Step 1
Install PVC Coupling
on Conduit or Stub-up
Flush or Just Below
Grade and Cap with
(Conduit Plug IP27c) or
Tape Prior to Pour

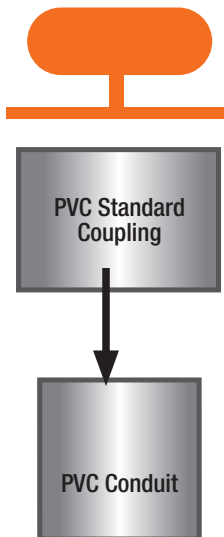

Step 2

Glue
Slip End Bell
Coupling

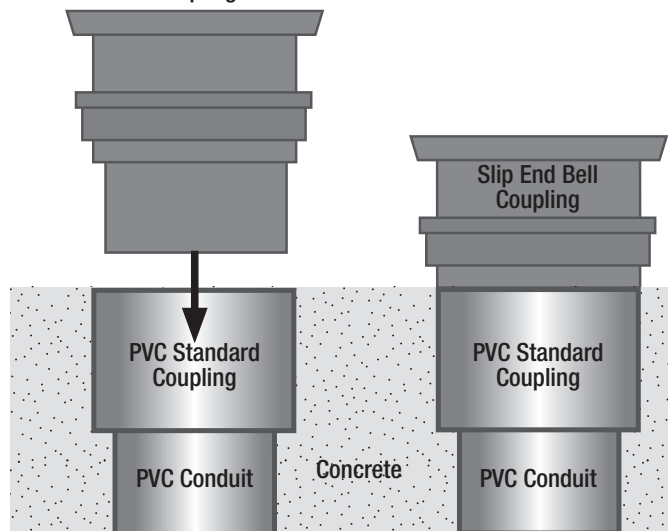

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC.
Productivity and value thru ideas



**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP12g

Slip PVC Transition Couplings to Smooth Bushing PVC Schedule 40 & 80



Save
at Least
1 Hour per
Installation.

**NO
REAMING TOOL
REQUIRED**

**Transitions into
PVC Standard Coupling**

**Save Cost on the Rigid
Nipple, Tape & Labor**

**Use for Entire Job -
Not Just for Repair**

**Apply PVC Cement
to Secure & Complete**

SEE WEBSITE
VIDEO **IP12h**

See Our
Conduit Plug
See page IP27c



1/2" thru 4"

Transition Couplings

Size	Catalog #
1/2"	50 SLIP/SB
3/4"	75 SLIP/SB
1"	100 SLIP/SB
1-1/4"	125 SLIP/SB
1-1/2"	150 SLIP/SB
2"	200 SLIP/SB
2-1/2"	250 SLIP/SB
3"	300 SLIP/SB
3-1/2"	350 SLIP/SB
4"	400 SLIP/SB

All SP Products Inc. Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications



c **US**
PATENTED



Step 1

Install PVC Coupling
on Conduit or Stub-up
Flush or Just Below
Grade and Cap with
(Conduit Plug IP27c) or
Tape Prior to Pour



Step 2

Glue Slip SB
Coupling

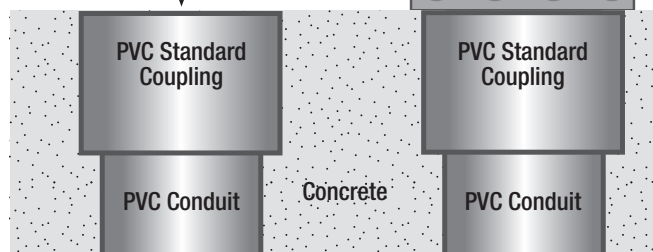

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC.
Productivity and value thru ideas



**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP12h



Slip PVC Transition Couplings to Smooth Grounding Bushing PVC Schedule 40 & 80

**NO
REAMING TOOL
REQUIRED**



**Transitions into
PVC Standard Coupling**

**Save Cost on the Rigid
Nipple, Tape & Labor**

**Use for Entire Job -
Not Just for Repair**

**Apply PVC Cement
to Secure & Complete**

See Our
Conduit Plug
See page IP27c



Save
at Least
1 Hour per
Installation.


1/2" thru 4"

c **US**
PATENTED

SEE WEBSITE
VIDEO **IP12h**


Step 1

Install PVC Coupling
on Conduit or Stub-up
Flusher Just Below
Grade and Cap with
(Conduit Plug IP27c) or
Tape Prior to Pour




Step 2

Glue Slip SB
Coupling



Slip SB
Coupling

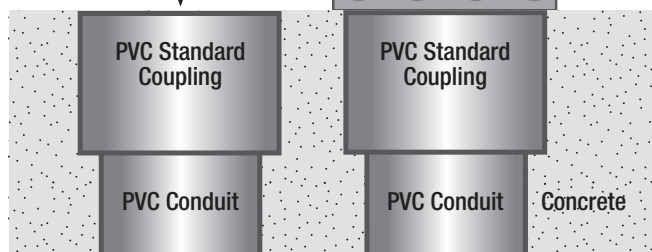

Transition Couplings

Size	Catalog #
1/2"	50 SLIP/SB
3/4"	75 SLIP/SB
1"	100 SLIP/SB
1-1/4"	125 SLIP/SB
1-1/2"	150 SLIP/SB
2"	200 SLIP/SB
2-1/2"	250 SLIP/SB
3"	300 SLIP/SB
3-1/2"	350 SLIP/SB
4"	400 SLIP/SB

All SP Products Inc. Transition
Fittings are manufactured for
installation to either meet or
exceed in accordance with
NEMA TC2, TC3 or UL 651
specifications

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC.
Productivity and value thru ideas



**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP12i

Slip PVC Transition Couplings to Compression EMT PVC Schedule 40 & 80



Save
at Least
1 Hour per
Installation.

**NO
REAMING TOOL
REQUIRED**

**Transitions into
PVC Standard Coupling**

**Save Cost on the Rigid
Nipple, Tape & Labor**

**Use for Entire Job -
Not Just for Repair**

**Apply PVC Cement
to Secure & Complete**


See Our
Conduit Plug
See page IP27c



c us
PATENTED



Step 1

Install PVC Coupling
on Conduit or Stub-up
Flush or Just Below
Grade and Cap with
(Conduit Plug IP27c) or
Tape Prior to Pour




Step 2

Glue Slip SB
Coupling

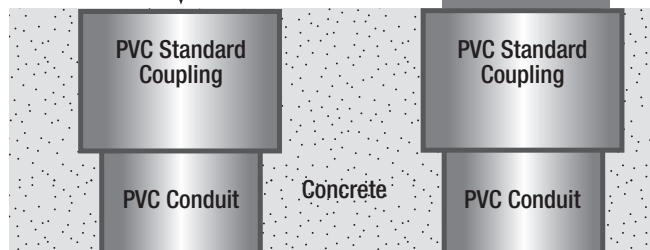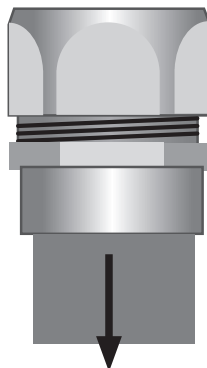

Step 3

Attach
EMT Conduit
to Slip EMT
Compression
Coupling

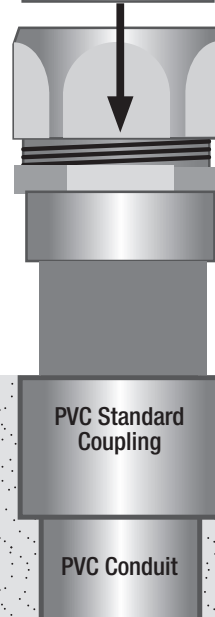

1/2" thru 4"

Transition Couplings

Size	Catalog #
1/2"	50 SLIP/SB
3/4"	75 SLIP/SB
1"	100 SLIP/SB
1-1/4"	125 SLIP/SB
1-1/2"	150 SLIP/SB
2"	200 SLIP/SB
2-1/2"	250 SLIP/SB
3"	300 SLIP/SB
3-1/2"	350 SLIP/SB
4"	400 SLIP/SB

All SP Products Inc. Transition
Fittings are manufactured for
installation to either meet or
exceed in accordance with
NEMA TC2, TC3 or UL 651
specifications

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC.
Productivity and value thru ideas



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP12j

Long Slip PVC Transition Couplings to HDPE Conduit PVC Schedule 40 & 80



NEW

- Step 1 - Install PVC Coupling prior to pour and cap
(Conduit Plug IP27c) or tape
- Step 2 - Glue Slip Coupling into PVC Coupling
- Step 3 - Install HDPE Conduit using Polywater®
Bonduit® Conduit Adhesive to connect to
PVC Slip Coupling

**NO
REAMING TOOL
REQUIRED**



Bonduit and Bonduit XI are
UL recognized and was tested to
UL standard 746C.

1/2" thru 4"

Transition Couplings


Size	Catalog #
1/2"	50 SLIP/HDPE
3/4"	75 SLIP/HDPE
1"	100 SLIP/HDPE
1-1/4"	125 SLIP/HDPE
1-1/2"	150 SLIP/HDPE
2"	200 SLIP/HDPE
2-1/2"	250 SLIP/HDPE
3"	300 SLIP/HDPE
3-1/2"	350 SLIP/HDPE
4"	400 SLIP/HDPE
5"	500 SLIP/HDPE
6"	600 SLIP/HDPE

All SP Products Inc. Transition
Fittings are manufactured for
installation to either meet or
exceed in accordance with
NEMA TC2, TC3 or UL 651
specifications

Using Polywater® Bonduit®
Conduit Adhesive creates a
permanent watertight/airtight seal
connecting PVC to HDPE.

Stronger pullout strength than
most mechanical couplings.

SEE WEBSITE
VIDEO **IP12m**

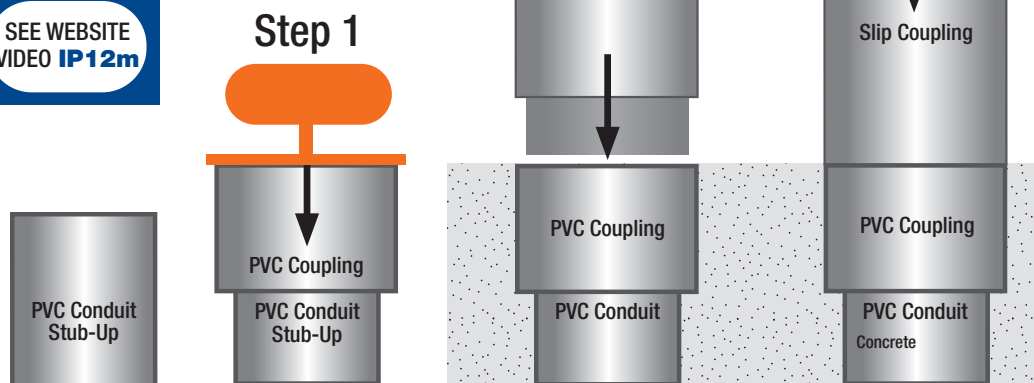

Use On Entire Job Not Just For Repair!

SP PRODUCTS, INC.
Productivity and value thru ideas



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

1P12m



Long Slip PVC Transition Couplings to Fiberglass Conduit PVC Schedule 40 & 80

NEW


- Step 1 - Install PVC Coupling prior to pour and cap
(Conduit Plug IP27c) or tape
- Step 2 - Glue Slip Coupling into PVC Coupling
- Step 3 - Install Fiberglass Conduit using Polywater®
Bonduit® Conduit Adhesive to connect to
PVC Slip Coupling

**NO
REAMING TOOL
REQUIRED**



Bonduit and Bonduit XI are
UL recognized and was tested to
UL standard 746C.

Step 3



Slip Coupling

PVC Coupling

PVC Conduit
Concrete


Step 2



PVC Coupling

PVC Conduit

Step 1



PVC Coupling

PVC Conduit
Stub-Up

SEE WEBSITE
VIDEO **IP12n**

PVC Conduit
Stub-Up

Using Polywater® Bonduit®
Conduit Adhesive creates a
permanent watertight/airtight seal
connecting PVC to Fiberglass.

Stronger pullout strength than
most mechanical couplings.

1/2" thru 4"

Transition Couplings

Size	Catalog #
1/2"	50 SLIP/FIBER
3/4"	75 SLIP/FIBER
1"	100 SLIP/FIBER
1-1/4"	125 SLIP/FIBER
1-1/2"	150 SLIP/FIBER
2"	200 SLIP/FIBER
2-1/2"	250 SLIP/FIBER
3"	300 SLIP/FIBER
3-1/2"	350 SLIP/FIBER
4"	400 SLIP/FIBER
5"	500 SLIP/FIBER
6"	600 SLIP/FIBER

All SP Products Inc. Transition
Fittings are manufactured for
installation to either meet or
exceed in accordance with
NEMA TC2, TC3 or UL 651
specifications

Use On Entire Job Not Just For Repair!

SP PRODUCTS, INC.
Productivity and value thru ideas



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP12n

PVC Female Adapter Transition Couplings



PVC Schedule 40 & 80

Save
at Least
1 Hour per
Installation.

**NO
REAMING TOOL
REQUIRED**



PVC Female
Adapter to RGD

IP12p



PVC Female
Adapter to EMT

IP12q



PVC Female Adapter
to Liquidtight

IP12r



PVC Female Adapter
to PVC End Bell

IP12s



PVC Female Adapter
to Flexible

IP12t



PVC Female Adapter
to Compression EMT

IP12u

SP PRODUCTS, INC.
Productivity and value thru ideas



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

PVC Female Adapter Transition Couplings to Rigid Conduit

PVC Schedule 40 & 80



**Rigid
Conduit**

**PVC
Female
Adapter**

**NO
REAMING TOOL
REQUIRED**

Transitions in One Minute

**Save Cost on the Rigid
Nipple, Tape & Labor**

**Use for Entire Job -
Not Just for Repair**



**Patent
Pending**

1/2" thru 6"

Transition Couplings	
Size	Catalog #
1/2"	50 PVC FA-RGD
3/4"	75 PVC FA-RGD
1"	100 PVC FA-RGD
1-1/4"	125 PVC FA-RGD
1-1/2"	150 PVC FA-RGD
2"	200 PVC FA-RGD
2-1/2"	250 PVC FA-RGD
3"	300 PVC FA-RGD
3-1/2"	350 PVC FA-RGD
4"	400 PVC FA-RGD
5"	500 PVC FA-RGD
6"	600 PVC FA-RGD

All SP Products Inc. Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications

Customer must satisfy all codes and owners' specifications.



US

**PATENT PENDING
PATENTED**



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007

P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595

E: info@spproducts.com • www.spproducts.com

IP12p


PVC Female Adapter Transition Couplings to EMT




PVC Schedule 40 & 80

Save
at Least
1 Hour per
Installation.

**EMT
Conduit**

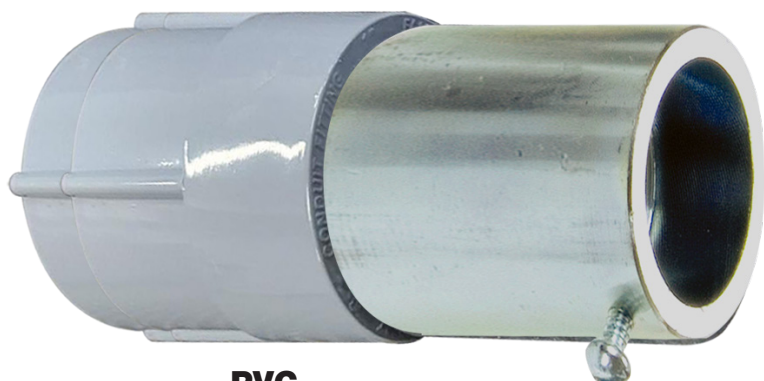

**PVC
Female
Adapter**

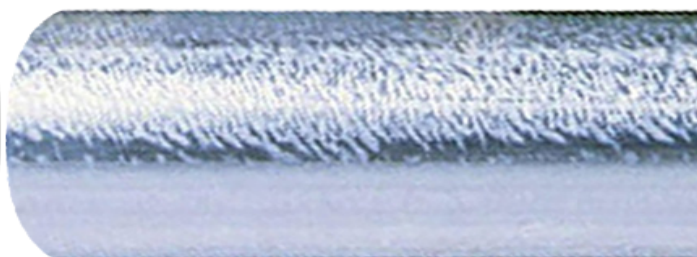

**NO
REAMING TOOL
REQUIRED**

Transitions in One Minute

**Save Cost on the Rigid
Nipple, Tape & Labor**

**Use for Entire Job -
Not Just for Repair**



**Patent
Pending**

1/2" thru 4"

Transition Couplings	
Size	Catalog #
3/4"	75 PVC FA-EMT
1"	100 PVC FA-EMT
1-1/4"	125 PVC FA-EMT
1-1/2"	150 PVC FA-EMT
2"	200 PVC FA-EMT
2-1/2"	250 PVC FA-EMT
3"	300 PVC FA-EMT
3-1/2"	350 PVC FA-EMT
4"	400 PVC FA-EMT

All SP Products Inc. Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC
Productivity and value thru ideas



C

US

**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP12q

PVC Female Adapter Transition Couplings to Liquidtite/Sealtite PVC Schedule 40 & 80



Save
at Least
1 Hour per
Installation.



**PVC
Female
Adapter**



**Liquidtite/Sealtite
Conduit**

**NO
REAMING TOOL
REQUIRED**

Transitions in One Minute

**Save Cost on the Rigid
Nipple, Tape & Labor**

**Use for Entire Job -
Not Just for Repair**



**Patent
Pending**

1/2" thru 4"

Transition Couplings	
Size	Catalog #
1/2"	50 PVC FA-LIQ
3/4"	75 PVC FA-LIQ
1"	100 PVC FA-LIQ
1-1/4"	125 PVC FA-LIQ
1-1/2"	150 PVC FA-LIQ
2"	200 PVC FA-LIQ
2-1/2"	250 PVC FA-LIQ
3"	300 PVC FA-LIQ
3-1/2"	350 PVC FA-LIQ
4"	400 PVC FA-LIQ

All SP Products Inc. Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC
Productivity and value thru ideas



**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP12r

PVC Female Adapter Transition Couplings to End Bell



Save
at Least
1 Hour per
Installation.

PVC Schedule 40 & 80

**NO
REAMING TOOL
REQUIRED**

**Transitions in
One Minute**

**Save Cost on the
Rigid Nipple,
Tape & Labor**

**Use for Entire Job -
Not Just for Repair**



Patent
Pending

1/2" thru 6"

Transition Couplings	
Size	Catalog #
1/2"	50 PVC FA-EB
3/4"	75 PVC FA-EB
1"	100 PVC FA-EB
1-1/4"	125 PVC FA-EB
1-1/2"	150 PVC FA-EB
2"	200 PVC FA-EB
2-1/2"	250 PVC FA-EB
3"	300 PVC FA-EB
3-1/2"	350 PVC FA-EB
4"	400 PVC FA-EB
5"	500 PVC FA-EB
6"	600 PVC FA-EB

All SP Products Inc. Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications

Customer must satisfy all codes and owners' specifications.



**PATENT PENDING
PATENTED**



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP12s

PVC Female Adapter Transition Couplings to Flexible Conduit PVC Schedule 40 & 80



Save
at Least
1 Hour per
Installation.



**PVC
Female
Adapter**



**Liquidtight/Sealtite
Conduit**

**NO
REAMING TOOL
REQUIRED**

**Transitions in
One Minute**

**Save Cost on the
Rigid Nipple,
Tape & Labor**

**Use for Entire Job -
Not Just for Repair**



**Patent
Pending**

1/2" thru 4"

Transition Couplings	
Size	Catalog #
1/2"	50 PVC FA-FLEX
3/4"	75 PVC FA-FLEX
1"	100 PVC FA-FLEX
1-1/4"	125 PVC FA-FLEX
1-1/2"	150 PVC FA-FLEX
2"	200 PVC FA-FLEX
2-1/2"	250 PVC FA-FLEX
3"	300 PVC FA-FLEX
3-1/2"	350 PVC FA-FLEX
4"	400 PVC FA-FLEX

All SP Products Inc. Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC
Productivity and value thru ideas



**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE




730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP12t


PVC Female Adapter Transition Coupling to Compression EMT PVC Schedule 40 & 80



Save
at Least
1 Hour per
Installation.

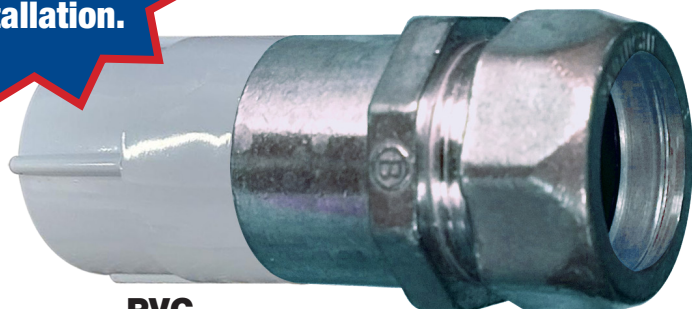

**PVC
Female
Adapter**

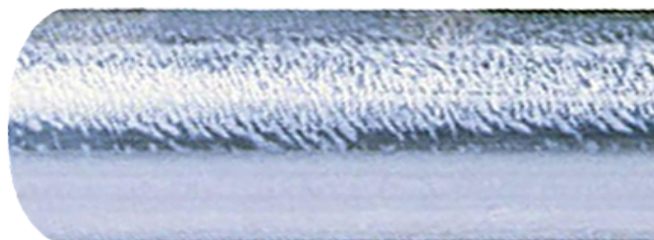

EMT

**NO
REAMING TOOL
REQUIRED**

**Transitions in
One Minute**

**Save Cost on the
Rigid Nipple,
Tape & Labor**

**Use for Entire Job -
Not Just for Repair**



**Patent
Pending**

1/2" thru 6"

Transition Couplings

Size	Catalog #
1/2"	50 PVC FA-CEMT
3/4"	75 PVC FA-CEMT
1"	100 PVC FA-CEMT
1-1/4"	125 PVC FA-CEMT
1-1/2"	150 PVC FA-CEMT
2"	200 PVC FA-CEMT
2-1/2"	250 PVC FA-CEMT
3"	300 PVC FA-CEMT
3-1/2"	350 PVC FA-CEMT
4"	400 PVC FA-CEMT
5"	500 PVC FA-CEMT
6"	600 PVC FA-CEMT

Fittings are manufactured for
installation to either meet or
exceed in accordance with
NEMA TC2, TC3 or UL 651
specifications

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC
Productivity and value thru ideas



**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP12u

Tapered Transition Couplings



PATENTED

PVC Conduit Schedule 40/80 When Exiting out of the Slab



IP13a
PVC to
PVC



IP13b
PVC to
EMT



IP13c
PVC to
Rigid



IP13a
PVC to
Flex



IP13e
PVC to
EMT Comp.




IP13f
PVC to
Liquidtight



IP13g
PVC to
Aluminum



IP13h
PVC to
Stainless
Steel

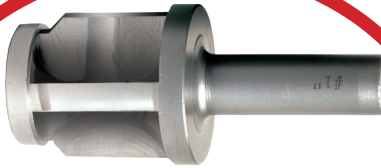

**REAMING
REQUIRED**



IP13i
PVC to
Galvanized
Rigid



IP13j
PVC to
Bushing
Adapter



IP13k
PVC to PVC
Inside to
Inside



IP13l
PVC to
Threaded
PVC



IP13m
Male PVC
Threaded
to PVC



IP13n
Female PVC
Threaded
to PVC



IP13p
3/4" PVC to
MC Cable



IP13q
PVC to PVC
Reducers

Use On Entire Job – Not Just For Repair! Sizes From 1/2" thru 6"

Customer must satisfy all codes and owners' specifications.



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP13

Tapered Transition Couplings



PATENTED

PVC Schedule 40 & 80 to PVC Conduit

Save
at Least
1 Hour per
Installation.



**Prevents Damage
to PVC Risers**

**Use for Entire Job -
Not Just for Repair**

See Our
Conduit Plug
See page IP27c



See Our
REAMING BITS for
Transition Couplings



See page IP15

**REAMING
REQUIRED**

SEE WEBSITE
VIDEO **IP13a**

1/2" thru 6"


Transition Couplings UL Listed up thru 6"

Size	Catalog #	Size	Catalog #
1/2"	50PVC/PVC	2-1/2"	250PVC/PVC
3/4"	75PVC/PVC	3"	300PVC/PVC
1"	100PVC/PVC	3-1/2"	350PVC/PVC
1-1/4"	125PVC/PVC	4"	400PVC/PVC
1-1/2"	150PVC/PVC	5"	500PVC/PVC
2"	200PVC/PVC	6"	600PVC/PVC

All SP Products Inc. Transition Fittings are
manufactured for installation to either meet or
exceed in accordance with NEMA TC2, TC3 or
UL 651 specifications


All Above Meet UL651CSA C22.2, No.85 and
US Army Corps Engineers Specifications

STEP 1

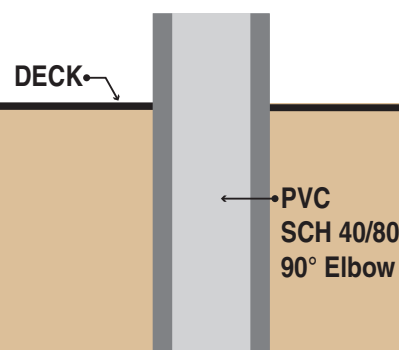


STEP 2

Cut SCH 40/80 PVC Elbow
Flush to Deck
DECK

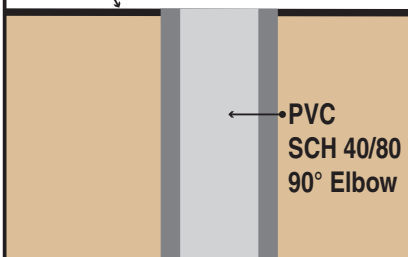


STEP 3

Ream out 1/2 of wall thickness
SCH 40/80 PVC Elbow
DECK

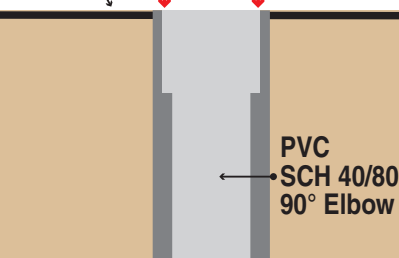

STEP 4

Insert
Specified
Transition
Coupling
DECK
Glue into
Place
PVC
SCH 40/80
90° Elbow



Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC.
Productivity and value thru ideas



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP13a

Tapered Transition Coupling



PVC Schedule 40 & 80 to EMT Conduit

**Transitions in
Less Than 5 Minutes!**

**Save Cost on the Rigid
Nipple, Tape & Labor**

**Use for Entire Job -
Not Just for Repair**

Save
at Least
1 Hour per
Installation.



**REAMING
REQUIRED**

UL US
PATENTED

1/2" thru 4"


All SP Products Inc.
Transition Fittings are
manufactured for
installation to either
meet or exceed
in accordance with
NEMA TC2, TC3 or
UL 651 specifications

SEE WEBSITE
VIDEO **IP13b**

Transition Couplings	
Size	Catalog #
1/2"	50PVC/EMT
3/4"	75PVC/EMT
1"	100PVC/EMT
1-1/4"	125PVC/EMT
1-1/2"	150PVC/EMT
2"	200PVC/EMT
2-1/2"	250-PVC/EMT
3"	300PVC/EMT
3-1/2"	350PVC/EMT
4"	400PVC/EMT


For any size conduit and
configuration either galvanized or
stainless steel. Consult Factory

STEP 1

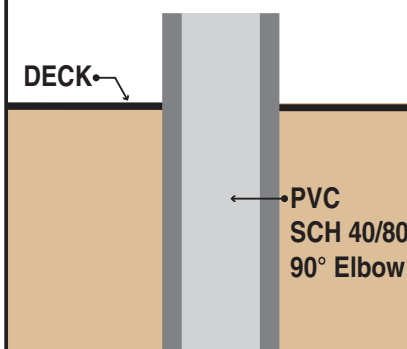


STEP 2

Cut SCH 40/80 PVC Elbow
Flush to Deck

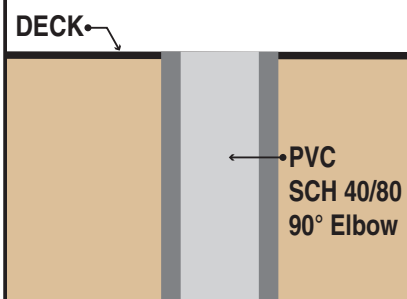

STEP 3

Ream out 1/2 of wall thickness
SCH 40/80 PVC Elbow

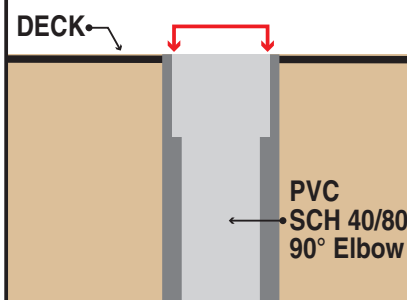


STEP 4

Insert
Specified
Transition
Coupling

Glue into
Place

PVC
SCH 40/80
90° Elbow

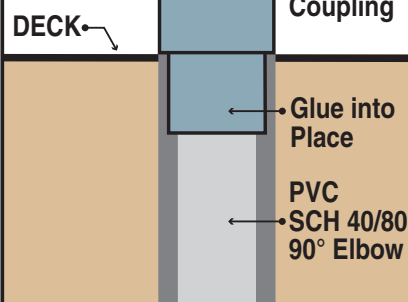

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC
Productivity and value thru ideas



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP13b

Tapered Transition Coupling



PVC Schedule 40 & 80 to Rigid Conduit

Save
at Least
1 Hour per
Installation.

Transitions in
Less Than 5 Minutes!

Save Cost on the Rigid
Nipple, Tape & Labor

Use for Entire Job -
Not Just for Repair



PATENTED



**REAMING
REQUIRED**

1/2" thru 6"

Transition Couplings	
Size	Catalog #
1/2"	50PVC/RGD
3/4"	75PVC/RGD
1"	100PVC/RGD
1-1/4"	125PVC/RGD
1-1/2"	150PVC/RGD
2"	200PVC/RGD
2-1/2"	250PVC/RGD
3"	300PVC/RGD
3-1/2"	350PVC/RGD
4"	400PVC/RGD
5"	500PVC/RGD
6"	600PVC/RGD

All SP Products Inc.
Transition Fittings are
manufactured for
installation to either
meet or exceed
in accordance with
NEMA TC2, TC3 or
UL 651 specifications

SEE WEBSITE
VIDEO **IP13c**

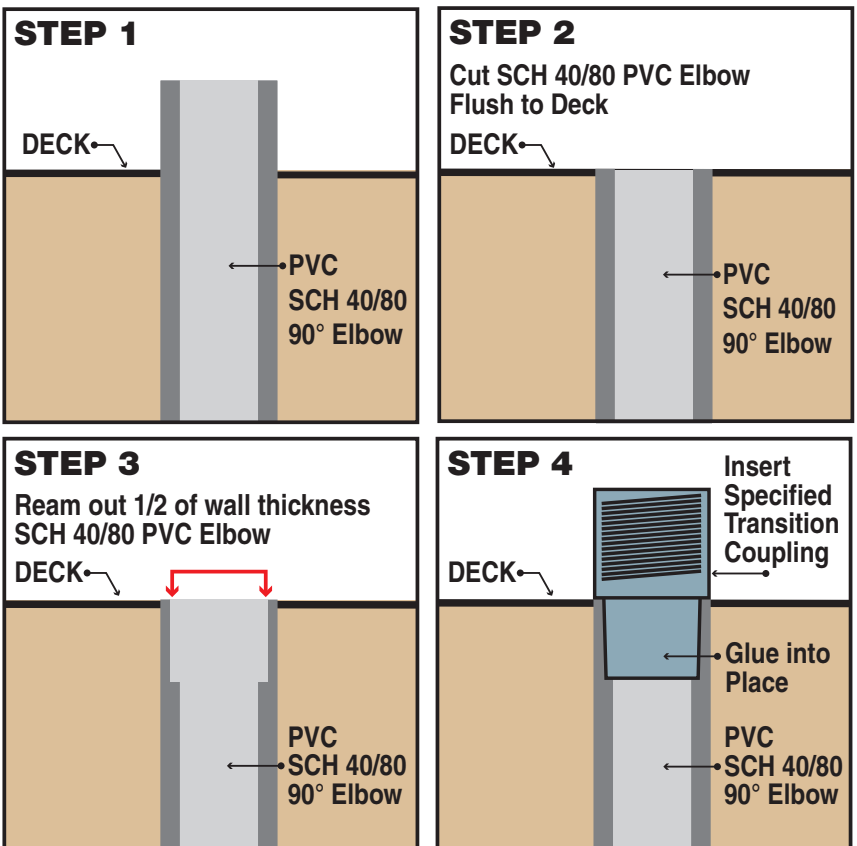

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC.
Productivity and value thru ideas



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP13c

Tapered Transition Coupling



PVC Schedule 40 & 80 to Flexible Metal Conduit

Save at Least
1 Hour per Installation.



Transitions in Less Than 5 Minutes!

Save Cost on the Rigid Nipple, Tape & Labor

Use for Entire Job - Not Just for Repair

See Our Conduit Plug
See page IP27c



See Our REAMING BITS for Transition Couplings



See page IP15

SEE WEBSITE VIDEO **IP13d**



PATENTED

REAMING REQUIRED


1/2" thru 1-1/2"

Transition Couplings

Size	Catalog #
1/2"	50PVC/FLEX
3/4"	75PVC/FLEX
1"	100PVC/FLEX
1-1/4"	125PVC/FLEX
1-1/2"	150PVC/FLEX


All SP Products Inc.
Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications

STEP 1

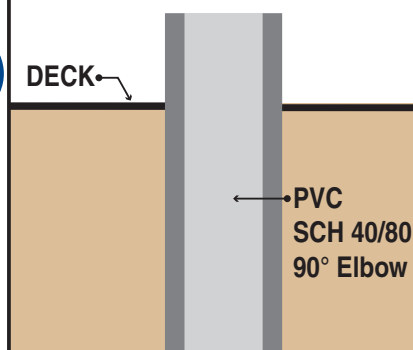


STEP 2

Cut SCH 40/80 PVC Elbow Flush to Deck

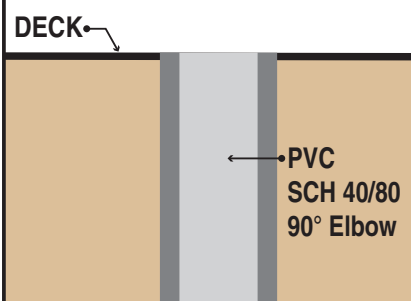


STEP 3

Ream out 1/2 of wall thickness SCH 40/80 PVC Elbow

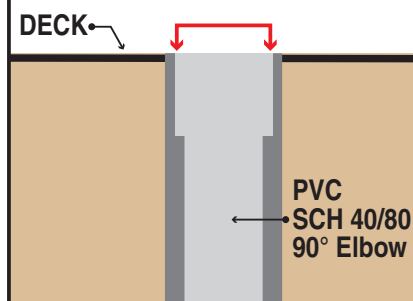

STEP 4

Insert Specified Transition Coupling

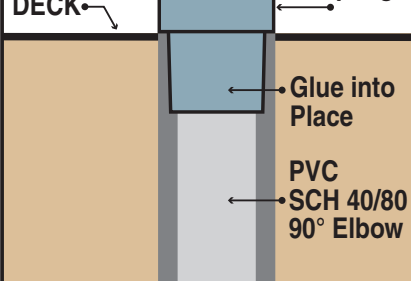

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC.
Productivity and value thru ideas



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP13d

Tapered Transition Coupling



PATENTED

PVC Schedule 40 & 80 to EMT Compression

Save
at Least
1 Hour per
Installation.



**REAMING
REQUIRED**

1/2" thru 4"

Transition Couplings

Size	Catalog #
1/2"	50PVC/EMT-C
3/4"	75PVC/EMT-C
1"	100PVC/EMT-C
1-1/4"	125PVC/EMT-C
1-1/2"	150PVC/EMT-C
2"	200PVC/EMT-C
2-1/2"	250PVC/EMT-C
3"	300PVC/EMT-C
4"	400PVC/EMT-C

All SP Products Inc. Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications


**Transitions in
Less Than 5 Minutes!**

**Save Cost on the Rigid
Nipple, Tape & Labor**

**Use for Entire Job -
Not Just for Repair**



SEE WEBSITE
VIDEO **IP13e**

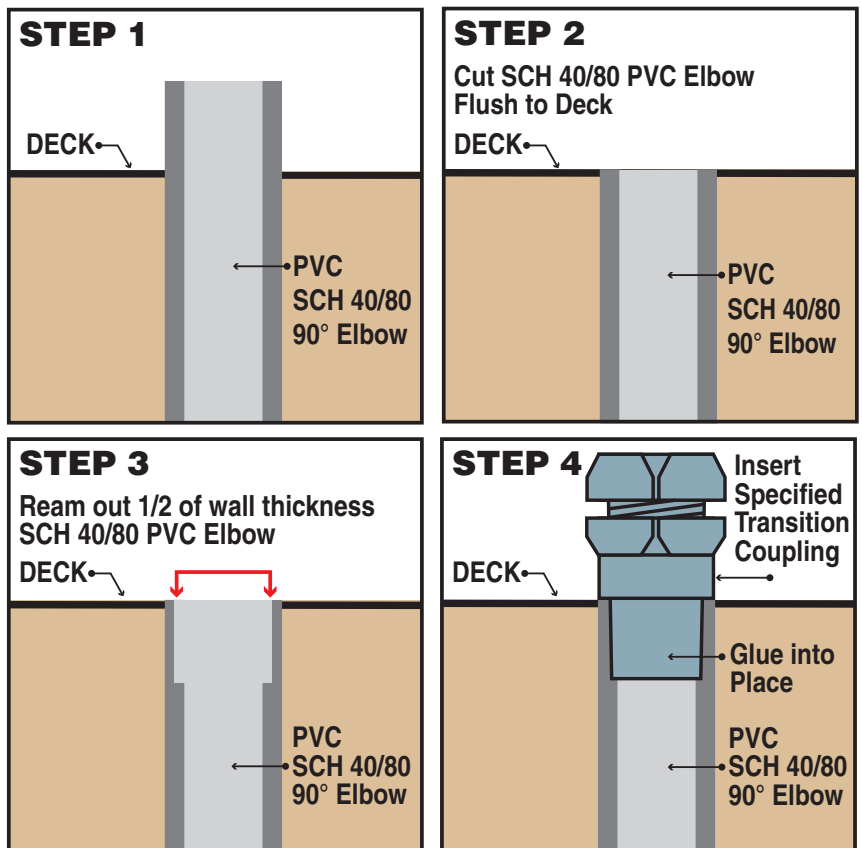

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC.
Productivity and value thru ideas



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP13e

Tapered Transition Coupling



PVC Schedule 40 & 80 to Sealtite/Liquidtite



**Transitions in
Less Than 5 Minutes!**

**Save Cost on the Rigid
Nipple, Tape & Labor**

**Use for Entire Job -
Not Just for Repair**







**REAMING
REQUIRED**

1/2" thru 4"

All SP Products Inc.
Transition Fittings are
manufactured for
installation to either
meet or exceed
in accordance with
NEMA TC2, TC3 or
UL 651 specifications

Transition Couplings	
Size	Catalog #
1/2"	50-PVC/LIQ
3/4"	75PVC/LIQ
1"	100PVC/LIQ
1-1/4"	125PVC/LIQ
1-1/2"	150PVC/LIQ
2"	200PVC/LIQ
2-1/2"	250PVC/LIQ
3"	300PVC/LIQ
3-1/2"	350PVC/LIQ
4"	400PVC/LIQ

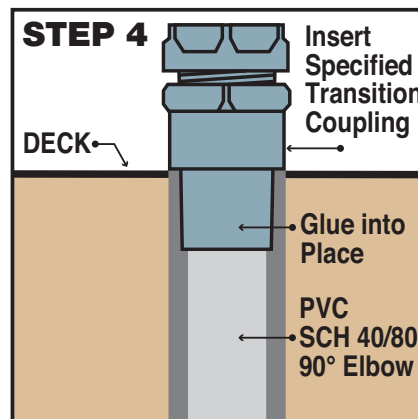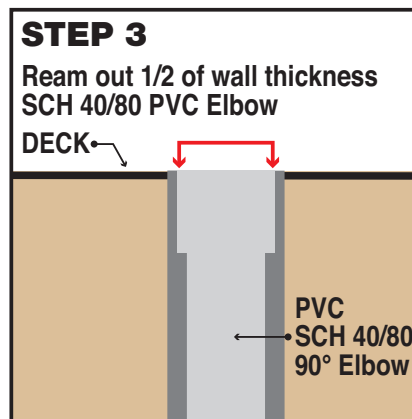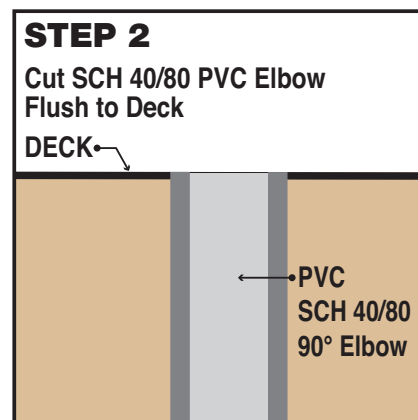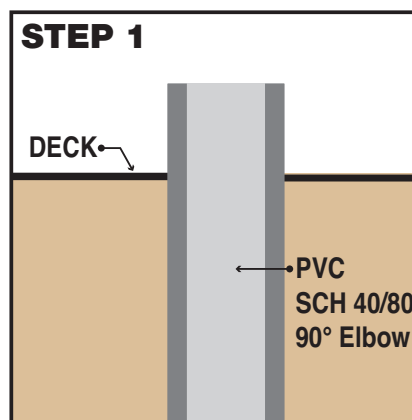

Customer must satisfy all codes and owners' specifications.



PATENT PENDING
PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP13f

Tapered Transition Coupling



PVC Schedule 40 & 80 to Aluminum Conduit

Save
at Least
1 Hour per
Installation.



**Transitions in
Less Than 5 Minutes!**

**Save Cost on the Rigid
Nipple, Tape & Labor**

**Use for Entire Job -
Not Just for Repair**



SEE WEBSITE
VIDEO **IP13g**





UL US
PATENTED

**REAMING
REQUIRED**

1/2" thru 6"

All SP Products Inc.
Transition Fittings are
manufactured for
installation to either
meet or exceed
in accordance with
NEMA TC2, TC3 or
UL 651 specifications

Transition Couplings	
Size	Catalog #
1/2"	50PVC/ALUM
3/4"	75PVC/ALUM
1"	100PVC/ALUM
1-1/4"	125PVC/ALUM
1 1/2"	150PVC/ALUM
2"	200PVC/ALUM
2-1/2"	250PVC/ALUM
3"	300PVC/ALUM
3-1/2"	350PVC/ALUM
4"	400PVC/ALUM
5"	500PVC/ALUM
6"	600PVC/ALUM

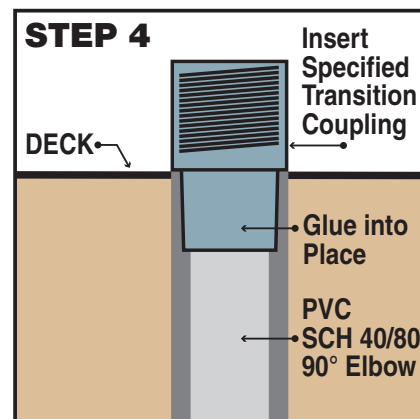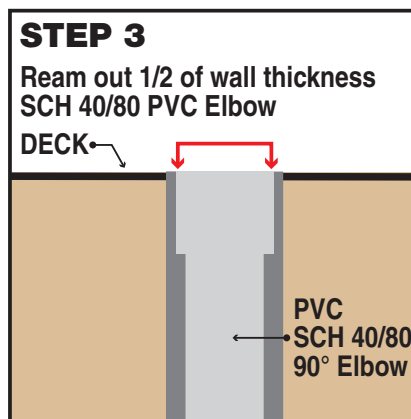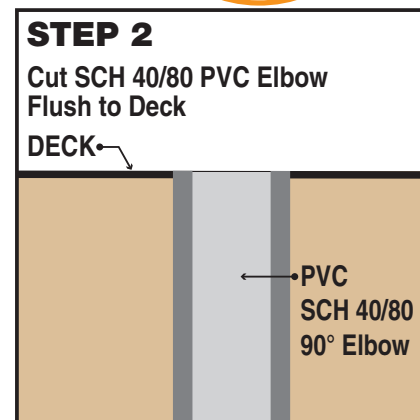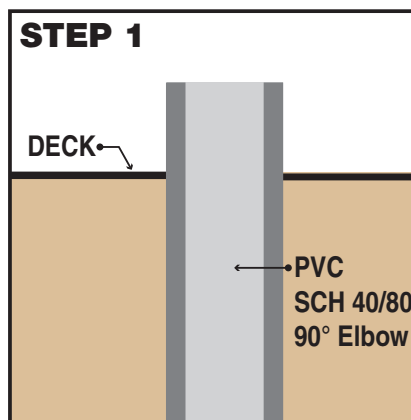

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC
Productivity and value thru ideas



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP13g

Tapered Transition Coupling



**PVC Schedule 40 & 80 to
Stainless Steel Conduit**

**Save
at Least
1 Hour per
Installation.**



PATENTED



**Transitions in
Less Than 5 Minutes!**

**Save Cost on the Rigid
Nipple, Tape & Labor**

**Use for Entire Job -
Not Just for Repair**

See Our
Conduit Plug
See page IP27c



See Our
REAMING BITS for
Transition Couplings



See page IP15

SEE WEBSITE
VIDEO **IP13h**

**REAMING
REQUIRED**


1/2" thru 4"

Transition Couplings

Size	Catalog #
1/2"	50PVC/SS
3/4"	75PVC/SS
1"	100PVC/SS
1-1/4"	125PVC/SS
1-1/2"	150PVC/SS
2"	200PVC/SS
2-1/2"	250PVC/SS
3"	300PVC/SS
3-1/2"	350PVC/SS
4"	400PVC/SS


All SP Products Inc.
Transition Fittings are
manufactured for
installation to either
meet or exceed
in accordance with
NEMA TC2, TC3 or
UL 651 specifications

STEP 1

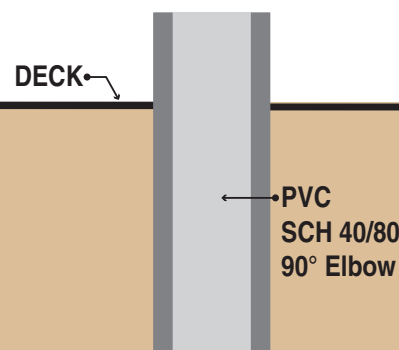


STEP 2

Cut SCH 40/80 PVC Elbow
Flush to Deck

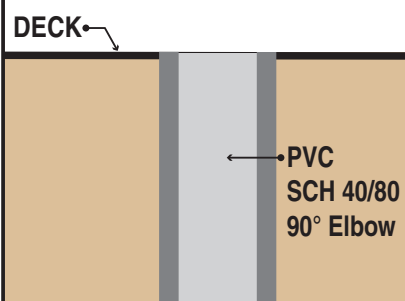


STEP 3

Ream out 1/2 of wall thickness
SCH 40/80 PVC Elbow

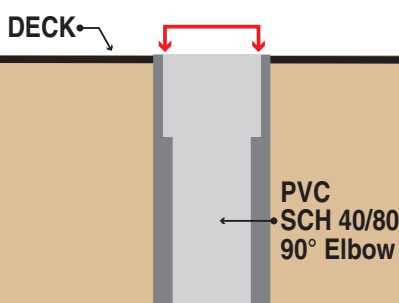

STEP 4

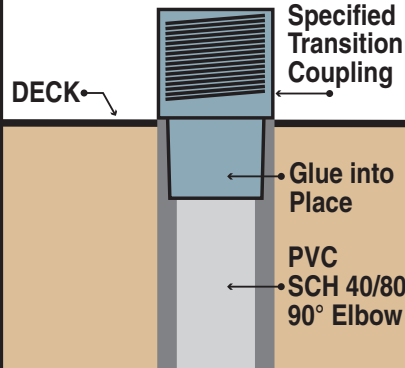

all codes and owners' specifications.

SP PRODUCTS, INC
Productivity and value thru ideas



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP13h

Transition Couplings



PVC Schedule 40 & 80 End Bell to Galvanized Rigid Conduit



QQYZ & QQYZ7
E80659

PATENT PENDING


1/2" thru 6"

Transition Couplings	
Size	Catalog #
1/2"	50-GRC-EB
3/4"	75-GRC-EB
1"	100-GRC-EB
1-1/4"	125-GRC-EB
1 1/2"	150-GRC-EB
2"	200-GRC-EB
2-1/2"	250-GRC-EB
3"	300-GRC-EB
3-1/2"	350-GRC-EB
4"	400-GRC-EB
5"	500-GRC-EB
6"	600-GRC-EB

**Quickly Transition
Galvanized Rigid or
Rigid Nipple Conduit
to Pvc End Bell**

SEE WEBSITE
VIDEO **IP13i**

Save
at Least
1 Hour per
Installation.

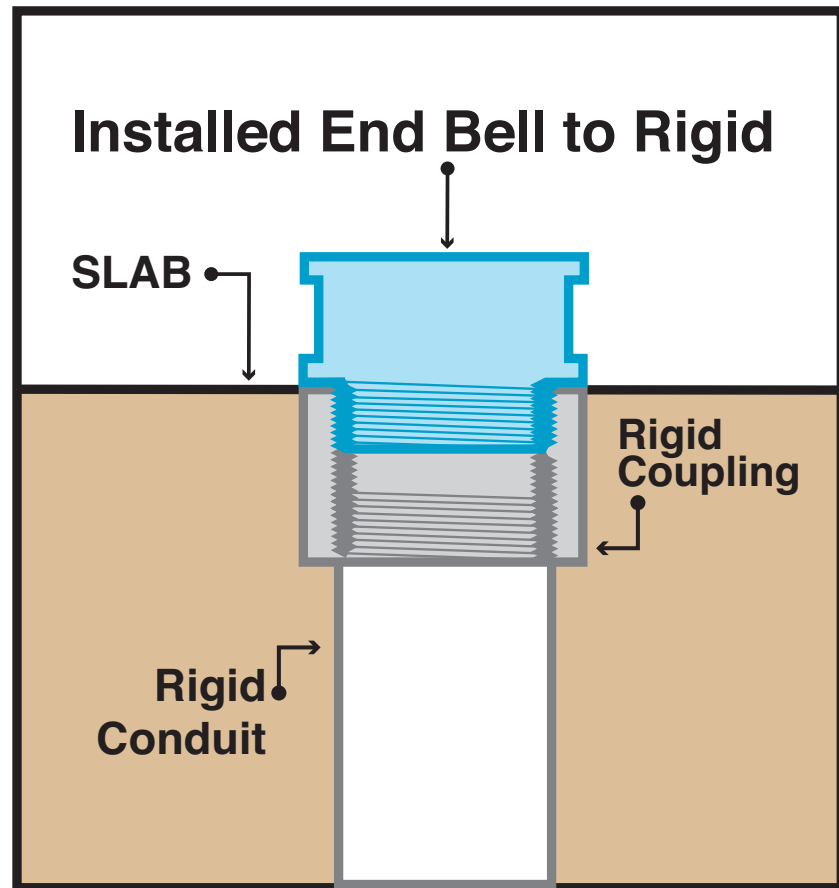

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC
Productivity and value thru ideas



PATENT PENDING
PATENTED



LABELS APPLY TO PRODUCTS **ONLY WHERE SHOWN ABOVE**

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP13i

Tapered Transition Bushing Adapter



SCH 40 PVC to Smooth Bushing



Transition Bushing Adapter for Pulling Wire

SIZE	CAT#
1/2"	50PVC/SB
3/4"	75PVC/SB
1"	100PVC/SB
1-1/4"	125PVC/SB
1-1/2"	150PVC/SB
2"	200PVC/SB
2-1/2"	250PVC/SB
3"	300PVC/SB
3-1/2"	350PVC/SB
4"	400PVC/SB

REAMING REQUIRED

Smooth edge allows trouble free wire pulls

3 Holes on 120° centers to receive tapped lugs

Install one with every connector

Ideal for installing transformers & switchgear



Transition Bushing Adapter for Pulling Grounding Wire

SIZE	CAT#
1/2"	50PVC/GSB
3/4"	75PVC/GSB
1"	100PVC/GSB
1-1/4"	125PVC/GSB
1-1/2"	150PVC/GSB
2"	200PVC/GSB
2-1/2"	250PVC/GSB
3"	300PVC/GSB
3-1/2"	350PVC/GSB
4"	400PVC/GSB

(Standard Slick Nut includes 1 Lug)

Must install 3 Lugs for UL Listing, extra lugs sold separately.

Consult Factory for prices and availability

Customer must satisfy all codes and owners' specifications.



**PATENT PENDING
PATENTED**



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP13j

Transition Couplings



NEW



PVC Schedule 40 & 80 to Tapered Inside PVC to Tapered Inside PVC



**Saves a Great Deal of Time
Repairing Conduit**

**The Inside Diameter
Remains the Same**

**Allows for Trouble Free
Wire and Cable Pulls**



c **UL** **US**
**PATENT
PENDING**







1/2" thru 6"

Transition Couplings

Size	Catalog #	Size	Catalog #
1/2"	50PVC-IN/PVC-IN	2-1/2"	250PVC-IN/PVC-IN
3/4"	75PVC-IN/PVC-IN	3"	300PVC-IN/PVC-IN
1"	100PVC-IN/PVC-IN	3-1/2"	350PVC-IN/PVC-IN
1-1/4"	125PVC-IN/PVC-IN	4"	400PVC-IN/PVC-IN
1-1/2"	150PVC-IN/PVC-IN	5"	500PVC-IN/PVC-IN
2"	200PVC-IN/PVC-IN	6"	600PVC-IN/PVC-IN

All SP Products Inc. Transition Fittings are
manufactured for installation to either meet
or exceed in accordance with NEMA TC2, TC3
or UL 651 specifications

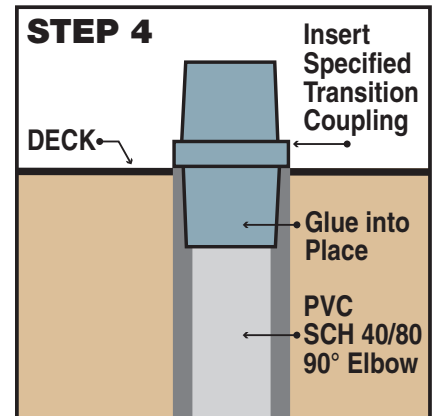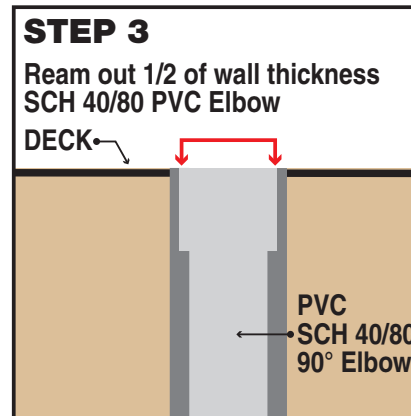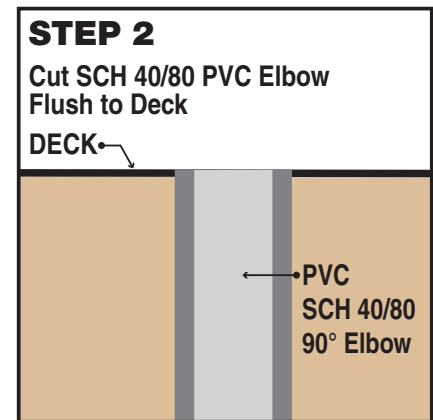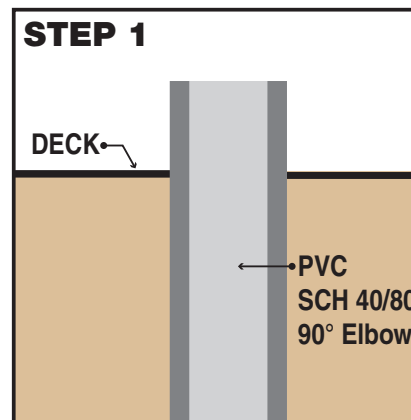

Customer must satisfy all codes and owners' specifications.



**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP13k

Transition Couplings




PVC Schedule 40 & 80 to PVC/PVC Threaded

See Our
Conduit Plug
See page IP27c



See Our
REAMING BITS for
Transition Couplings




See page IP15

Save
at Least
1 Hour per
Installation.

**Save a Great Deal of Time
Repairing Conduit**

**The Inside Diameter
Remains the Same**

**Allows for Trouble Free
Wire and Cable Pulls**

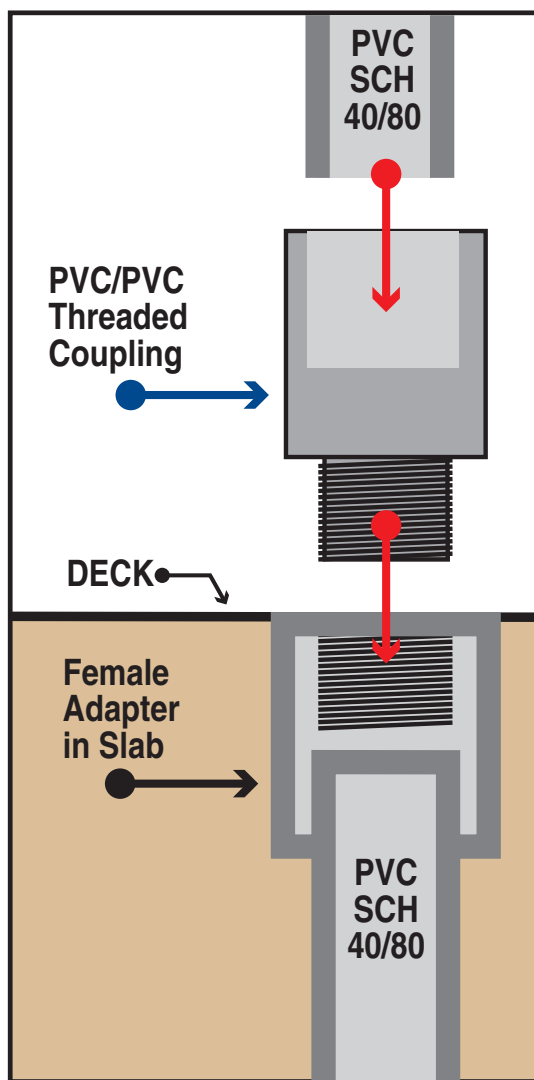

**PATENT
PENDING**

1/2" thru 6"

Transition Couplings

Size	Catalog #
1/2"	50-PVC/PVC-THR
3/4"	75-PVC/PVC-THR
1"	100-PVC/PVC-THR
1-1/4"	125-PVC/PVC-THR
1-1/2"	150-PVC/PVC-THR
2"	200-PVC/PVC-THR
2-1/2"	250-PVC/PVC-THR
3"	300-PVC/PVC-THR
3-1/2"	350-PVC/PVC-THR
4"	400-PVC/PVC-THR
5"	500-PVC/PVC-THR
6"	600-PVC/PVC-THR

All SP Products Inc.
Transition Fittings are manufactured for
installation to either meet or exceed
in accordance with NEMA TC2, TC3 or
UL 651 specifications

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC.
Productivity and value thru ideas



**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP131

Transition Couplings



PVC Schedule 40 & 80 to to Threaded PVC Conduit



Install on Concrete or
Masonry Walls

Support Box with Lock Nut

Supports Conduit
Runs in Any Direction

Eliminate Metal Box,
Hardware, Tape & Labor Cost

Save
at Least
1 Hour per
Installation.

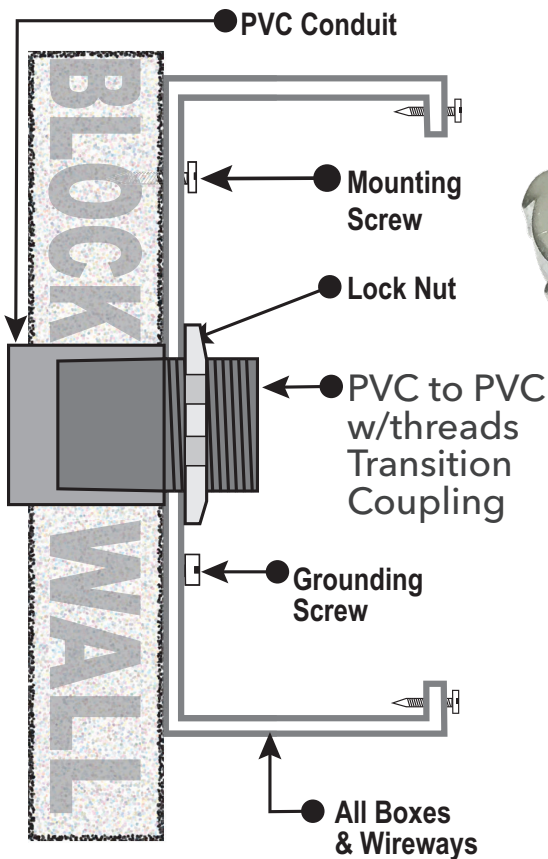

PATENTED

NEW

1/2" thru 6"

Transition Couplings
UL Listed up thru 2 1/2"

Size	Catalog #
1/2"	50-PVC/PVC-T
3/4"	75-PVC/PVC-T
1"	100-PVC/PVC-T
1-1/4"	125-PVC/PVC-T
1-1/2"	150-PVC/PVC-T
2"	200-PVC/PVC-T
2-1/2"	250-PVC/PVC-T
3"	300-PVC/PVC-T
3-1/2"	350-PVC/PVC-T
4"	400-PVC/PVC-T
5"	500-PVC/PVC-T
6"	600-PVC/PVC-T

All SP Products Inc.
Transition Fittings are manufactured for
installation to either meet or exceed
in accordance with NEMA TC2, TC3 or
UL 651 specifications

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC.
Productivity and value thru ideas



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP13m

NEW!

Transition Couplings

PVC Schedule 40 & 80 to Slip PVC to Threaded PVC



See Our
Conduit Plug
See page IP27c



**NO
REAMING
NEEDED!**

**Install on Concrete or
Masonry Walls**


Support Box with Lock Nut

**Supports Conduit
Runs in Any Direction**

**Eliminate Metal Box,
Hardware, Tape & Labor Cost**

**Save
at Least
1 Hour** per
Installation.

PATENT
PENDING

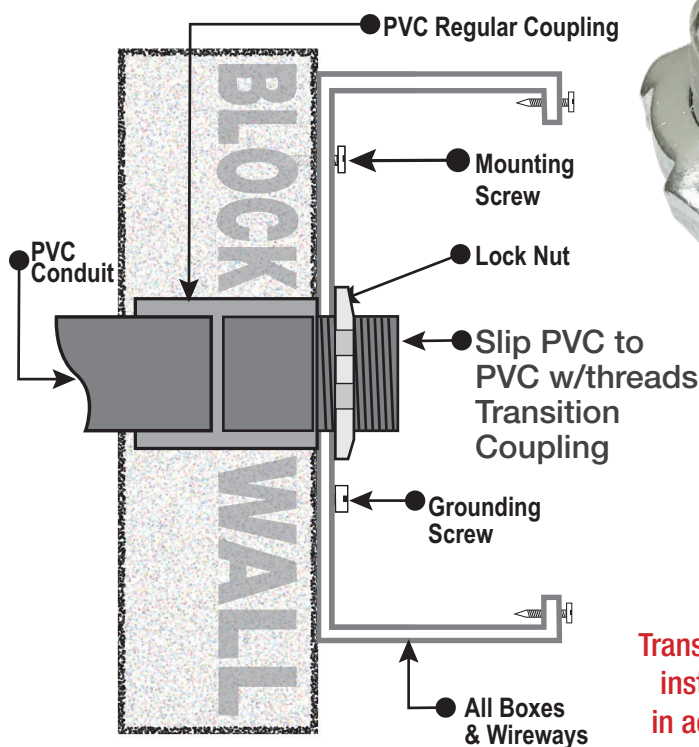

1/2" thru 6"

Transition Couplings
UL Listed up thru 2 1/2"

Size	Catalog #
1/2"	50-SLIP/PVC-T
3/4"	75-SLIP/PVC-T
1"	100-SLIP/PVC-T
1-1/4"	125-SLIP/PVC-T
1-1/2"	150-SLIP/PVC-T
2"	200-SLIP/PVC-T
2-1/2"	250-SLIP/PVC-T
3"	300-SLIP/PVC-T
3-1/2"	350-SLIP/PVC-T
4"	400-SLIP/PVC-T
5"	500-SLIP/PVC-T
6"	600-SLIP/PVC-T

All SP Products Inc.
Transition Fittings are manufactured for
installation to either meet or exceed
in accordance with NEMA TC2, TC3 or
UL 651 specifications

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC
Productivity and value thru ideas



PATENT PENDING
PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP13m²

PVC Tapered to Threaded Transition Couplings



to PVC Conduit Exiting Concrete Slab
PVC Schedule 40 & 80

Save at Least 1 Hour per Installation.



SEE WEBSITE VIDEO **IP13n**

Transitions in Less Than 5 Minutes!

Save Cost on the Rigid Nipple, Tape & Labor

Use for Entire Job - Not Just for Repair



UL US LISTED PATENT PENDING



1/2" thru 6"


Transition Couplings

Size	Catalog #
1/2"	50-PVC-T-THR
3/4"	75-PVC-T-THR
1"	100-PVC-T-THR
1-1/4"	125-PVC-T-THR
1-1/2"	150-PVC-T-THR
2"	200-PVC-T-THR
2-1/2"	250-PVC-T-THR
3"	300-PVC-T-THR
3-1/2"	350-PVC-T-THR
4"	400-PVC-T-THR
5"	450-PVC-T-THR
6"	500-PVC-T-THR

All Above Meet UL651
CSA C22.2, No.85 and
US Army Corps Engineers
Specifications

Saves a great deal of time transitioning from PVC conduit to MC Cable conduit above slab without damaging PVC risers and chipping concrete eliminating a concrete repair job!

All SP Products Inc. Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications

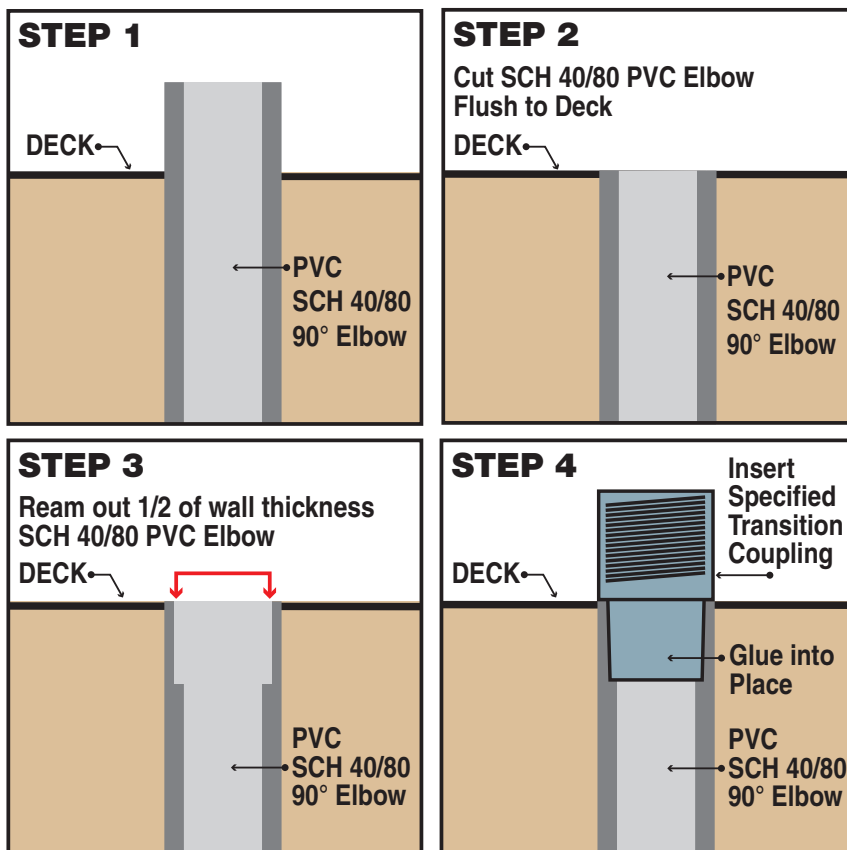

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC.
Productivity and value thru ideas



PATENT PENDING PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP13n



Transition Couplings

3/4" PVC Schedule 40/80 to Greenfield or MC Cable



Save
at Least
1 Hour per
Installation.

When Exiting Concrete Slab
and Feeding to Load Centers.

**Transitions in
Less Than 5 Minutes!**

**Save Cost on the Rigid
Nipple, Tape & Labor**

**Use for Entire Job -
Not Just for Repair**







SEE WEBSITE
VIDEO **IP13p**



Size	Cat#
3/4" x 1	75PVC-38/50 MC
3/4" x 2	75PVC-38/50 MC/DC

Saves a great deal of time transitioning from PVC conduit to Greenfield or MC Cable conduit above slab without damaging PVC risers and chipping concrete eliminating a concrete repair job!

All SP Products Inc. Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications

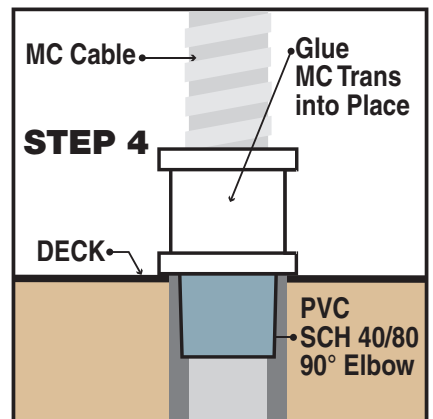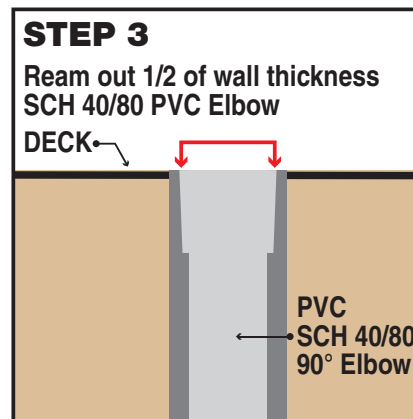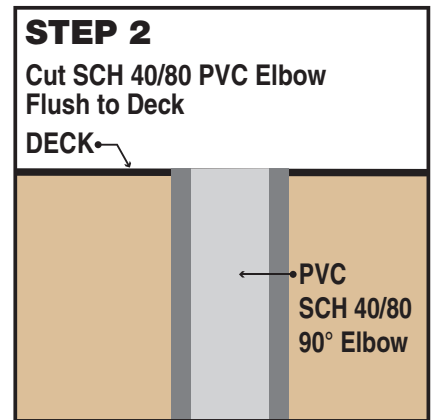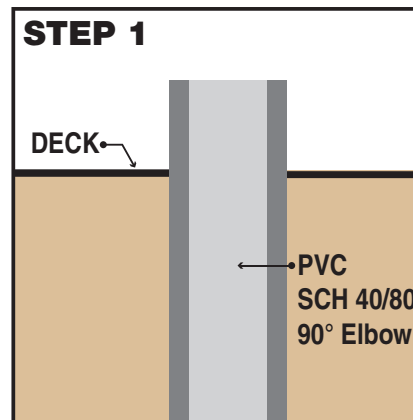

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC
Productivity and value thru ideas



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP13p

PVC REDUCERS

PVC SCH 40 & 80




Reduce any size PVC conduit
to a smaller size PVC conduit

PVC Sch 40/80 Reducers
from 3/4" to 6" any size
combination available

Sample of Catalog Number:

75 PVC conduit through
600 PVC conduit - 100 PVC
Reducer through 600 PVC
Reducer or any size
combinations in between.

Example: P/N 200PVC-125PVC
Reducer Sch40 = 2" PVC to
1-1/4" PVC Reducer Sch40



PATENT
PENDING



Customer must satisfy all codes and owners' specifications.



PATENT PENDING
PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP13q

Slip PVC Bell End Transition Fittings



**Bell End PVC Conduit Schedule 40/80
When Exiting out of the Slab**

**REAMING IS NOT
REQUIRED**

**Available
in Sizes from
1/2" to 6"**



IP13r

**PVC Bell End
to Galvanized**



IP13s

**PVC Bell End
to EMT**



IP13t

**PVC Bell End
to Liquidtight**



IP13u

**PVC Bell End
to Flexible**

**All SP Products Inc. Transition Fittings are manufactured for installation to either
meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications.**

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC.
Productivity and value thru ideas



**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP13r-u

Transition Couplings

PVC Bell End Adapter

Galvanized Rigid Conduit



NEW

SEE WEBSITE
VIDEO **IP13r**



PATENT
PENDING

**NO REAMING
REQUIRED**

Transition fitting adapter from a PVC to
Rigid Conduit **without reaming** PVC Conduit

Faster way to transition from a Schedule
40/80 PVC Conduit to a 90° Galvanized
Rigid Elbow **without reaming** PVC Conduit

Insert into Bell End of PVC and join threaded
end into Rigid Coupling which joins the 90°
Rigid Elbow, Rigid Coupling joins the other
end of 90° Elbow to Rigid Conduit

Meets UL651 CSA CSS.L Ng83 and
US Army Corps or Engineers Specs.



1/2" thru 6"

Transition Couplings

Size	Catalog #
1/2"	PBEA/RGD 50
3/4"	PBEA/RGD 75
1"	PBEA/RGD 100
1-1/4"	PBEA/RGD 125
1 1/2"	PBEA/RGD 150
2"	PBEA/RGD 200
2-1/2"	PBEA/RGD 250
3"	PBEA/RGD 300
3-1/2"	PBEA/RGD 350
4"	PBEA/RGD 400
5"	PBEA/RGD 500
6"	PBEA/RGD 600

All SP Products Inc. Transition
Fittings are manufactured for
installation to either meet or
exceed in accordance with
NEMA TC2, TC3 or UL 651
specifications

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC
Productivity and value thru ideas



PATENT PENDING
PATENTED



LABELS APPLY TO PRODUCTS **ONLY WHERE SHOWN ABOVE**

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP13r

Transition Couplings

PVC Bell End Adapter to EMT Conduit



NEW

SEE WEBSITE
VIDEO **IP13s**

**NO REAMING
REQUIRED**

Transition fitting adapter
from a PVC to EMT Conduit

Faster way to transition from a
Schedule 40/80 PVC Conduit to EMT
Conduit **without reaming** PVC Conduit

Insert into Bell End of PVC and Join with
EMT Conduit by tightening bolt

Meets UL651 CSA CSS.L Ng83 and
US Army Corps or Engineers Specs.

1/2" thru 4"

Transition Couplings

Size	Catalog #	Size	Catalog #
1/2"	PBEA/EMT 50	2"	PBEA/EMT 200
3/4"	PBEA/EMT 75	2-1/2"	PBEA/EMT 250
1"	PBEA/EMT 100	3"	PBEA/EMT 300
1-1/4"	PBEA/EMT 125	3-1/2"	PBEA/EMT 350
1 1/2"	PBEA/EMT 150	4"	PBEA/EMT 400

All SP Products Inc. Transition Fittings are manufactured
for installation to either meet or exceed in accordance
with NEMA TC2, TC3 or UL 651 specifications



**PATENT
PENDING**

EMT
Conduit



PVC
Bell End
to EMT
Transition
Coupling

PVC
Conduit
Bell End

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC.
Productivity and value thru ideas



**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP13s

Transition Couplings



PVC Bell End Adapter to Liquidtite Conduit

NEW

SEE WEBSITE
VIDEO **IP13t**

**NO REAMING
REQUIRED**

Transition fitting adapter
from a PVC to Liquidtite Conduit


Faster way to transition from a Schedule
40/80 PVC Conduit to Liquidtite Conduit
without reaming PVC Conduit

Insert into Bell End of PVC and Join
end into Liquidtite Conduit

Meets UL651 CSA CSS.L Ng83 and
US Army Corps or Engineers Specs.
1/2" thru 4"



c  US
PATENTED

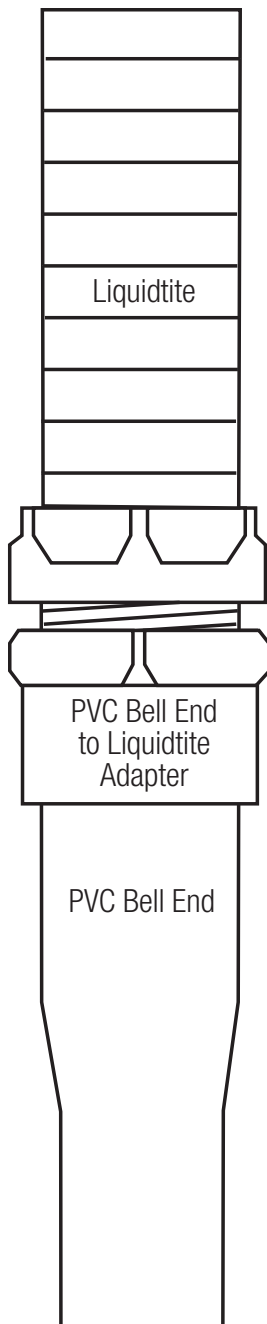

Transition Couplings

Size	Catalog #	Size	Catalog #
1/2"	PBEA/LIQ 50	2"	PBEA/LIQ 200
3/4"	PBEA/LIQ 75	2-1/2"	PBEA/LIQ 250
1"	PBEA/LIQ 100	3"	PBEA/LIQ 300
1-1/4"	PBEA/LIQ 125	3-1/2"	PBEA/LIQ 350
1 1/2"	PBEA/LIQ 150	4"	PBEA/LIQ 400

All SP Products Inc. Transition Fittings are manufactured
for installation to either meet or exceed in accordance
with NEMA TC2, TC3 or UL 651 specifications

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC.
Productivity and value thru ideas



**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP13t

Transition Couplings



PVC Bell End Adapter to Flexible Conduit

NEW

SEE WEBSITE
VIDEO **IP13u**

**NO REAMING
REQUIRED**

Transition fitting adapter
from a PVC to Flexible Conduit

Faster way to transition from a Schedule
40/80 PVC Conduit to Flexible Conduit
without reaming PVC Conduit

Insert into Bell End of PVC and Join
end into Flexible Conduit

Meets UL651 CSA CSS.L Ng83 and
US Army Corps or Engineers Specs.

1/2" thru 1-1/2"

Transition Couplings

Size	Catalog #
1/2"	PBEA/FLEX 50
3/4"	PBEA/FLEX 75
1"	PBEA/FLEX 100
1-1/2"	PBEA/FLEX 150

All SP Products Inc. Transition Fittings are manufactured
for installation to either meet or exceed in accordance
with NEMA TC2, TC3 or UL 651 specifications



PATENTED

Customer must satisfy all codes and owners' specifications.



**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP13u

Galvanized Rigid Transition Couplings to Schedule 40/80 PVC Stub-Up



Save at Least
1 Hour per Installation.



When Concrete is Poured and Metal Below the Slab is Needed

Transitions in Less Than 5 Minutes!

Save Cost on the Rigid Nipple, Tape & Labor

Use for Entire Job - Not Just for Repair



PATENT PENDING

See Our REAMING BITS for Transition Couplings



See page IP15


SEE WEBSITE
VIDEO **IP13v**

1/2" thru 6"

Transition Couplings

Size	Catalog #
1/2"	50-PVC-R-GRC
3/4"	75-PVC-R-GRC
1"	100-PVC-R-GRC
1-1/4"	125-PVC-R-GRC
1-1/2"	150-PVC-R-GRC
2"	200-PVC-R-GRC
2-1/2"	250-PVC-R-GRC
3"	300-PVC-R-GRC
3-1/2"	350-PVC-R-GRC
4"	400-PVC-R-GRC
5"	500-PVC-R-GRC
6"	600-PVC-R-GRC

All Above Meet UL651
CSA C22.2, No.85 and
US Army Corps Engineers
Specifications

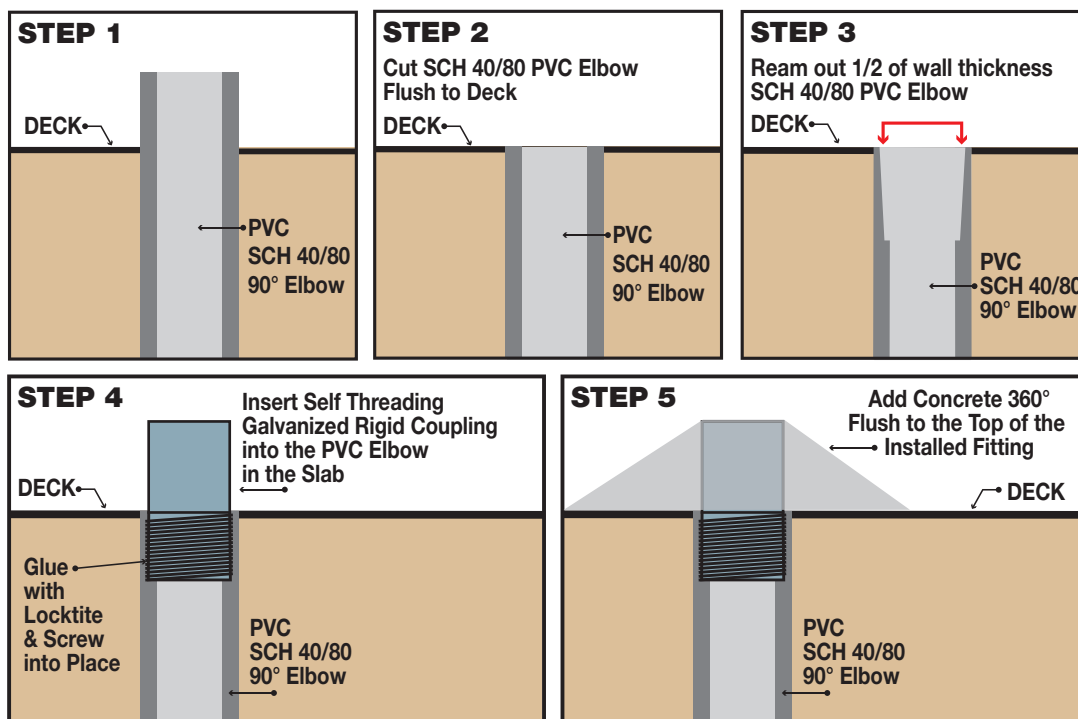

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC
Productivity and value thru ideas



PATENT PENDING
PATENTED




LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP13v



EMT Transition Couplings to Schedule 40/80 PVC End Bell



1/2" thru 4"

Transition Couplings	
Size	Catalog #
1/2"	50-PEBA-EMT
3/4"	75-PEBA-EMT
1"	100-PEBA-EMT
1-1/4"	125-PEBA-EMT
1-1/2"	150-PEBA-EMT
2"	200-PEBA-EMT
2-1/2"	250-PEBA-EMT
3"	300-PEBA-EMT
3-1/2"	350-PEBA-EMT
4"	400-PEBA-EMT

All Above Meet UL651
CSA C22.2, No.85 and
US Army Corps Engineers
Specifications



PATENT
PENDING

**When Concrete is Poured and
Metal Below the Slab is Needed**

Transitions in Less Than 5 Minutes!

Save Cost on the Rigid Nipple, Tape & Labor

Use for Entire Job - Not Just for Repair

Customer must satisfy all codes and owners' specifications.



US

PATENT PENDING
PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP13w

Combo Transition Fittings

REAMING IS NOT REQUIRED for Installation



IP13aa

Sealrite/
Liquidrite
to RGD



IP13bb

Sealrite/
Liquidrite
to EMT



IP13cc

Sealrite/Liquidrite
to EMT
Compression



IP13dd

RGD to
EMT

Available
in Sizes
from
1/2" to 4"



IP13ee

RGD to
EMT
Compression



IP13ff

Flexible
to EMT



IP13gg

Flexible
to RGD

All SP Products Inc. Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications.

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC.
Productivity and value thru ideas



PATENT PENDING
PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP13aa-gg



Sealtite/Liquidtite to Galvanized Rigid Conduit



Transitions from Liquidtite to RGD in minutes

Great for wiring transformers, solar systems & pumps.

All SP Products Inc. Transition Fittings are manufactured for installation to either meet or exceed in accordance with NEMA TC2, TC3 or UL 651 specifications

**PATENT
PENDING**



SEE WEBSITE
VIDEO **IP13aa**

1/2" thru 4"

Transition Couplings

Size	Catalog #
1/2"	50-LT-RGD
3/4"	75-LT-RGD
1"	100-LT-RGD
1-1/4"	125-LT-RGD
1-1/2"	150-LT-RGD
2"	200-LT-RGD
2-1/2"	250-LT-RGD
3"	300-LT-RGD
3-1/2"	350-LT-RGD
4"	400-LT-RGD



**PATENT PENDING
PATENTED**



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP13aa



Sealtite/Liquidtite to EMT



**Transitions from
Liquidtite to
EMT in minutes**

**Great for wiring
transformers,
solar systems
& pumps.**

All SP Products Inc.
Transition Fittings are manufactured
for installation to either meet or
exceed in accordance with NEMA TC2,
TC3 or UL 651 specifications

**PATENT
PENDING**



SEE WEBSITE
VIDEO **IP13bb**

1/2" thru 4"

Transition Couplings

Size	Catalog #
1/2"	50-LT-EMT
3/4"	75-LT-EMT
1"	100-LT-EMT
1-1/4"	125-LT-EMT
1-1/2"	150-LT-EMT
2"	200-LT-EMT
2-1/2"	250-LT-EMT
3"	300-LT-EMT
3-1/2"	350-LT-EMT
4"	400-LT-EMT

SP PRODUCTS, INC
Productivity and value thru ideas



**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE




730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP13bb



Sealtite/Liquidtite to EMT Compression

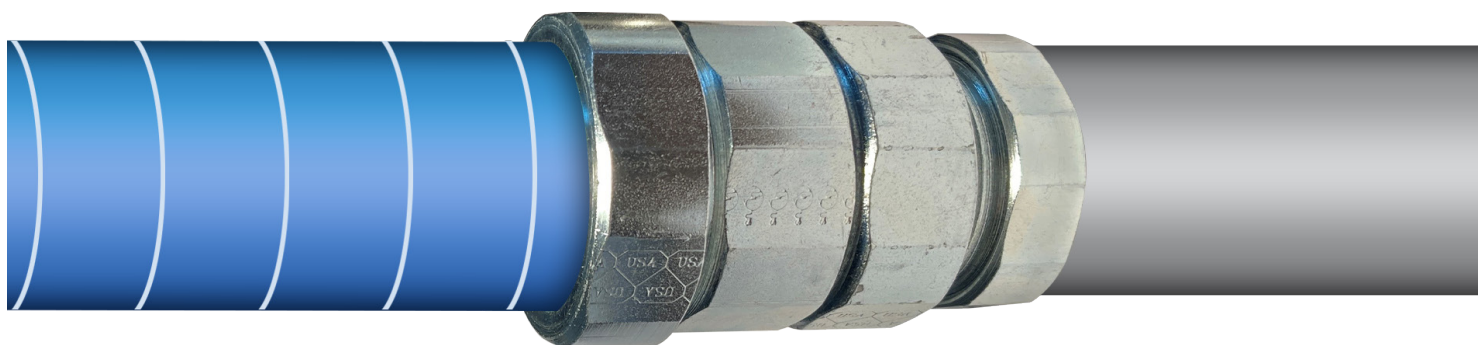

**Transitions from
Liquidtite to EMT
Compression
in minutes**

SEE WEBSITE
VIDEO **IP13cc**

**Great for wiring
transformers,
solar systems
& pumps.**

All SP Products Inc.
Transition Fittings are manufactured
for installation to either meet or
exceed in accordance with NEMA TC2,
TC3 or UL 651 specifications

**PATENT
PENDING**



1/2" thru 4"

Transition Couplings

Size	Catalog #
1/2"	50-LT-EMT-C
3/4"	75-LT-EMT -C
1"	100-LT-EMT-C
1-1/4"	125-LT-EMT-C
1-1/2"	150-LT-EMT-C
2"	200-LT-EMT-C
2-1/2"	250-LT-EMT-C
3"	300-LT-EMT-C
3-1/2"	350-LT-EMT-C
4"	400-LT-EMT-C

SP PRODUCTS, INC
Productivity and value thru ideas



**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE




730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP13cc



Galvanized Rigid Conduit to EMT

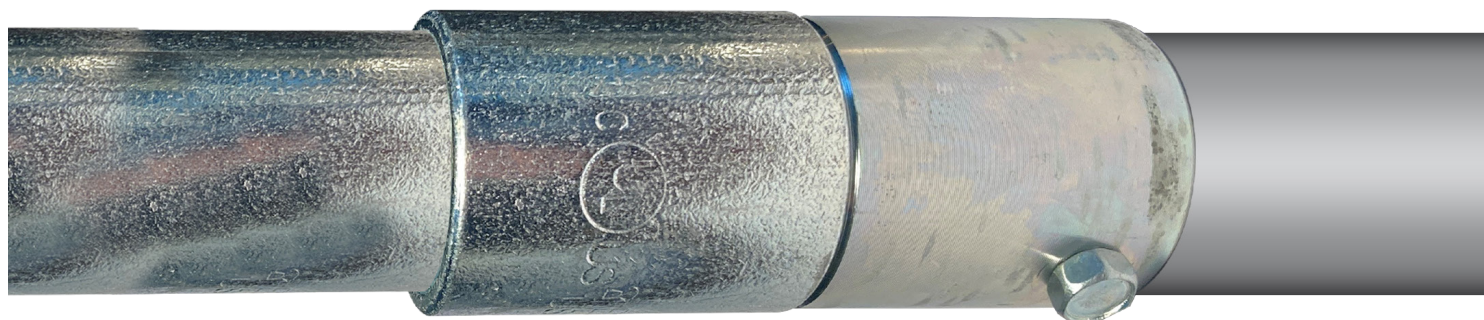

**Transitions from
RGD to EMT
in minutes**

**Great for wiring
transformers,
solar systems
& pumps.**

All SP Products Inc.
Transition Fittings are manufactured
for installation to either meet or
exceed in accordance with NEMA TC2,
TC3 or UL 651 specifications

**PATENT
PENDING**



SEE WEBSITE
VIDEO **IP13dd**

1/2" thru 4"

Transition Couplings

Size	Catalog #
1/2"	50-RGD-EMT
3/4"	75-RGD-EMT
1"	100-RGD-EMT
1-1/4"	125-RGD-EMT
1-1/2"	150-RGD-EMT
2"	200-RGD-EMT
2-1/2"	250-RGD-EMT
3"	300-RGD-EMT
3-1/2"	350-RGD-EMT
4"	400-RGD-EMT

SP PRODUCTS, INC.
Productivity and value thru ideas



**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP13dd



Galvanized Rigid Conduit to EMT Compression



**Transitions from
RGD to EMT
Compression
in minutes**

**Great for wiring
transformers,
solar systems
& pumps.**

All SP Products Inc.
Transition Fittings are manufactured
for installation to either meet or
exceed in accordance with NEMA TC2,
TC3 or UL 651 specifications

**PATENT
PENDING**



SEE WEBSITE
VIDEO **IP13ee**

1/2" thru 4"

Transition Couplings

Size	Catalog #
1/2"	50-RGD-EMT-C
3/4"	75-RGD-EMT-C
1"	100-RGD-EMT-C
1-1/4"	125-RGD-EMT-C
1-1/2"	150-RGD-EMT-C
2"	200-RGD-EMT-C
2-1/2"	250-RGD-EMT-C
3"	300-RGD-EMT-C
3-1/2"	350-RGD-EMT-C
4"	400-RGD-EMT-C

SP PRODUCTS, INC
Productivity and value thru ideas



**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP13ee

Flexible Conduit to EMT



**Transitions from
Flex to EMT in
minutes**



1/2" thru 4"

Transition Couplings

Size	Catalog #
1/2"	50-FLEX-EMT
3/4"	75-FLEX-EMT
1"	100-FLEX-EMT
1-1/4"	125-FLEX-EMT
1-1/2"	150-FLEX-EMT
2"	200-FLEX-EMT
2-1/2"	250-FLEX-EMT
3"	300-FLEX-EMT
3-1/2"	350-FLEX-EMT
4"	400-FLEX-EMT



**Great for wiring
transformers,
solar systems
& pumps.**

All SP Products Inc.
Transition Fittings are manufactured
for installation to either meet or
exceed in accordance with NEMA TC2,
TC3 or UL 651 specifications

**PATENT
PENDING**



**PATENT PENDING
PATENTED**




LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP13ff

Flexible Conduit to RGD

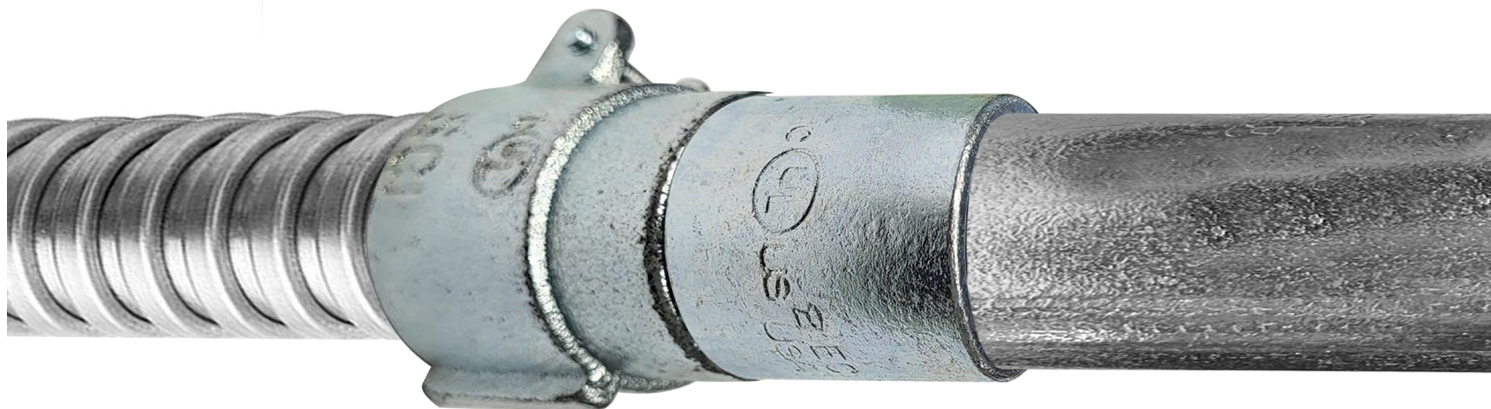

**Transitions from
Flex to RGD in
minutes**

**Great for wiring
transformers,
solar systems
& pumps.**

All SP Products Inc.
Transition Fittings are manufactured
for installation to either meet or
exceed in accordance with NEMA TC2,
TC3 or UL 651 specifications



**PATENT
PENDING**

1/2" thru 4"

Transition Couplings

Size	Catalog #
1/2"	50-FLEX-RGD
3/4"	75-FLEX-RGD
1"	100-FLEX-RGD
1-1/4"	125-FLEX-RGD
1-1/2"	150-FLEX-RGD
2"	200-FLEX-RGD
2-1/2"	250-FLEX-RGD
3"	300-FLEX-RGD
3-1/2"	350-FLEX-RGD
4"	400-FLEX-RGD

SP PRODUCTS, INC.
Productivity and value thru ideas



**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE




730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP13gg

HDPE Conduit to RGD



Using Polywater® BonDuit® Conduit Adhesive
creates a permanent watertight/airtight seal
connecting RGD to HDPE.

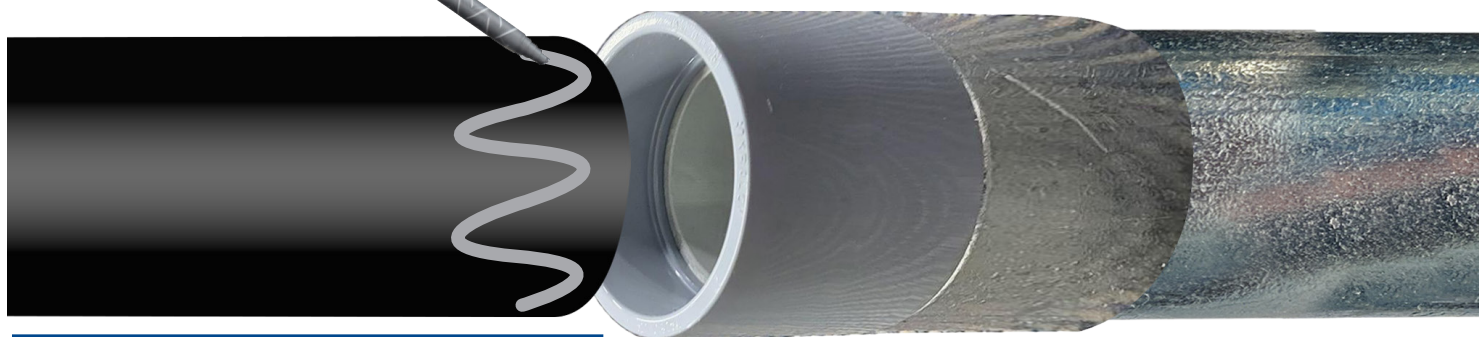

**Stronger pullout strength than
most mechanical couplings.**



BonDuit and BonDuit XI are
UL recognized and was tested
to UL standard 746C.



PATENT
PENDING

**Transitions from
HDPE to RGD in
minutes**

**Great for wiring
transformers,
solar systems
& pumps.**

All SP Products Inc. Transition
Fittings are manufactured for
installation to either meet or
exceed in accordance with NEMA
TC2, TC3 or UL 651 specifications

1/2" thru 6"

Transition Couplings

Size	Catalog #
1/2"	50-HDPE-RGD
3/4"	75-HDPE-RGD
1"	100-HDPE-RGD
1-1/4"	125-HDPE-RGD
1-1/2"	150-HDPE-RGD
2"	200-HDPE-RGD
2-1/2"	250-HDPE-RGD
3"	300-HDPE-RGD
3-1/2"	350-HDPE-RGD
4"	400-HDPE-RGD
5"	500-HDPE-RGD
6"	600-HDPE-RGD

SP PRODUCTS, INC
Productivity and value thru ideas



PATENT PENDING
PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE


730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP13hh

HDPE Conduit to EMT




Using Polywater® BonDuit® Conduit Adhesive
creates a permanent watertight/airtight seal
connecting EMT to HDPE.

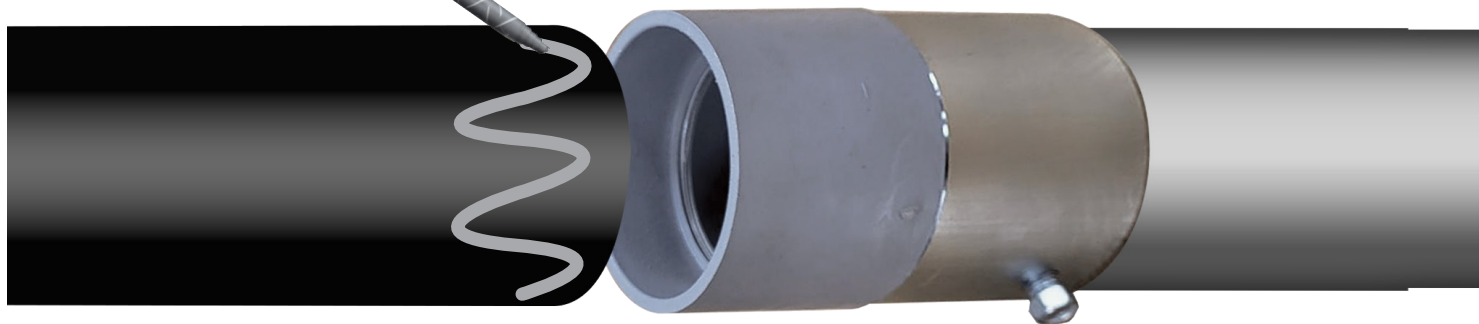

**Stronger pullout strength than
most mechanical couplings.**



BonDuit and BonDuit XI are
UL recognized and was tested
to UL standard 746C.

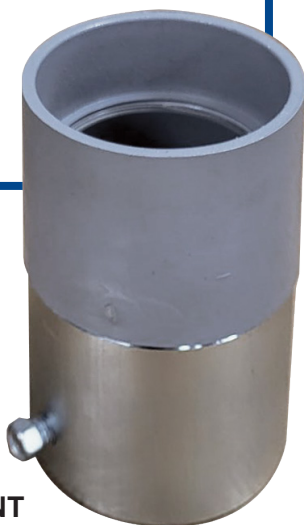

PATENT
PENDING

**Transitions from
HDPE to EMT in
minutes**

**Great for wiring
transformers,
solar systems
& pumps.**

All SP Products Inc. Transition
Fittings are manufactured for
installation to either meet or
exceed in accordance with NEMA
TC2, TC3 or UL 651 specifications

1/2" thru 4"

Transition Couplings

Size	Catalog #
1/2"	50-HDPE-EMT
3/4"	75-HDPE-EMT
1"	100-HDPE-EMT
1-1/4"	125-HDPE-EMT
1-1/2"	150-HDPE-EMT
2"	200-HDPE-EMT
2-1/2"	250-HDPE-EMT
3"	300-HDPE-EMT
3-1/2"	350-HDPE-EMT
4"	400-HDPE-EMT

SP PRODUCTS, INC
Productivity and value thru ideas




PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP13ii

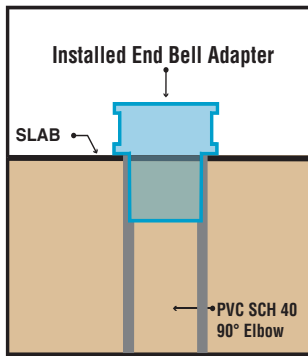

PVC End Bell Adapter

PVC Schedule 40 & 80



Allows Faster Trouble Free Wire Pulls
Use for Entire Job - Not Just for Repair

Stub Up, Cut Flush to Slab, Ream Out PVC,
Glue in End Bell, Cap Conduit for a
Professional Looking Job!



Sizes 1/2" thru 6"

Catalog #	Size
PEBA#50	1/2"
PEBA#75	3/4"
PEBA#100	1"
PEBA#125	1-1/4"
PEBA#150	1-1/2"
PEBA#200	2"
PEBA#250	2-1/2"
PEBA#300	3"
PEBA#350	3-1/2"
PEBA#400	4"
PEBA#500	5"
PEBA#600	6"

All Above Meet UL651
 CSA C22.2, No.85 and
 US Army Corps Engineers
 Specifications




Qwikduct Templates can be used with all
 standardized trade size conduit specified
 per NPA 70 NEC

See Our
 REAMING BITS for
 Transition Couplings


See page IP15




Perfect for use with QwikDuct HDPE Templates for Railway, Highway & Tollway

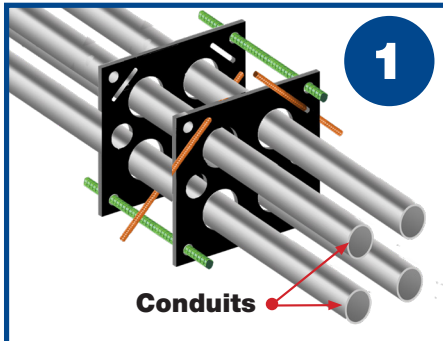

1. Align QwikDuct close to manhole or vault

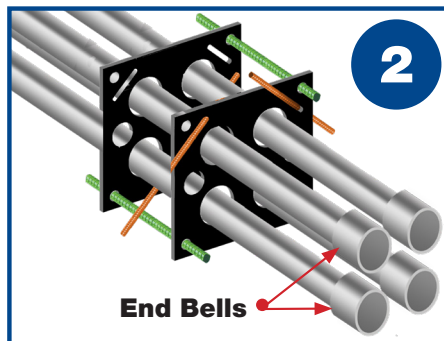

2. Ream out conduits and glue on end bell
 adapters to each conduit inside or out-
 side manhole or vault

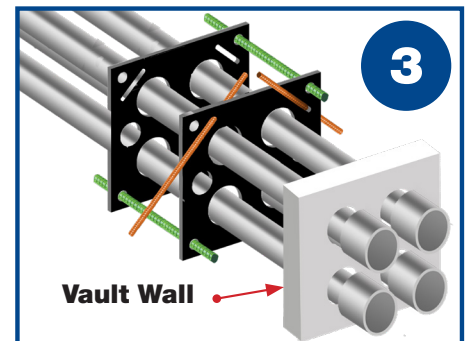

3. Slide conduits with bell end adapters thru
 manhole openings inside or outside manhole
 or vault

Customer must satisfy all codes and owners' specifications.



PATENT PENDING
 PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
 P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
 E: info@spproducts.com • www.spproducts.com

IP14

Threaded End Bell Adapter

PVC Schedule 40 & 80




PATENTED



1/2" thru 6"

Catalog #	Size
PEBAT#50	1/2"
PEBAT#75	3/4"
PEBAT#100	1"
PEBAT#125	1-1/4"
PEBAT#150	1-1/2"
PEBAT#200	2"
PEBAT#250	2-1/2"
PEBAT#300	3"
PEBAT#350	3-1/2"
PEBAT#400	4"
PEBAT#500	5"
PEBAT#600	6"

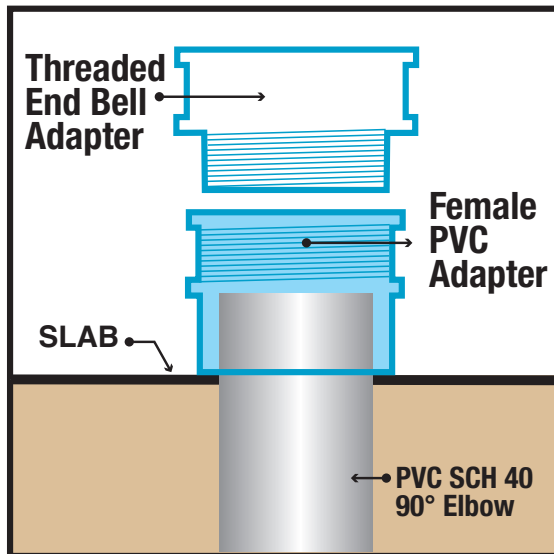

Customer must satisfy all codes and owners' specifications.



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP14a



Long End Bell Adapter


PVC Schedule 40 & 80



Available from 2" to 8"
Specify Length

**REAMING
REQUIRED**

- Ream out Stub-Up
- Glue Long End Bell Tapered Adapter into Stub-Up

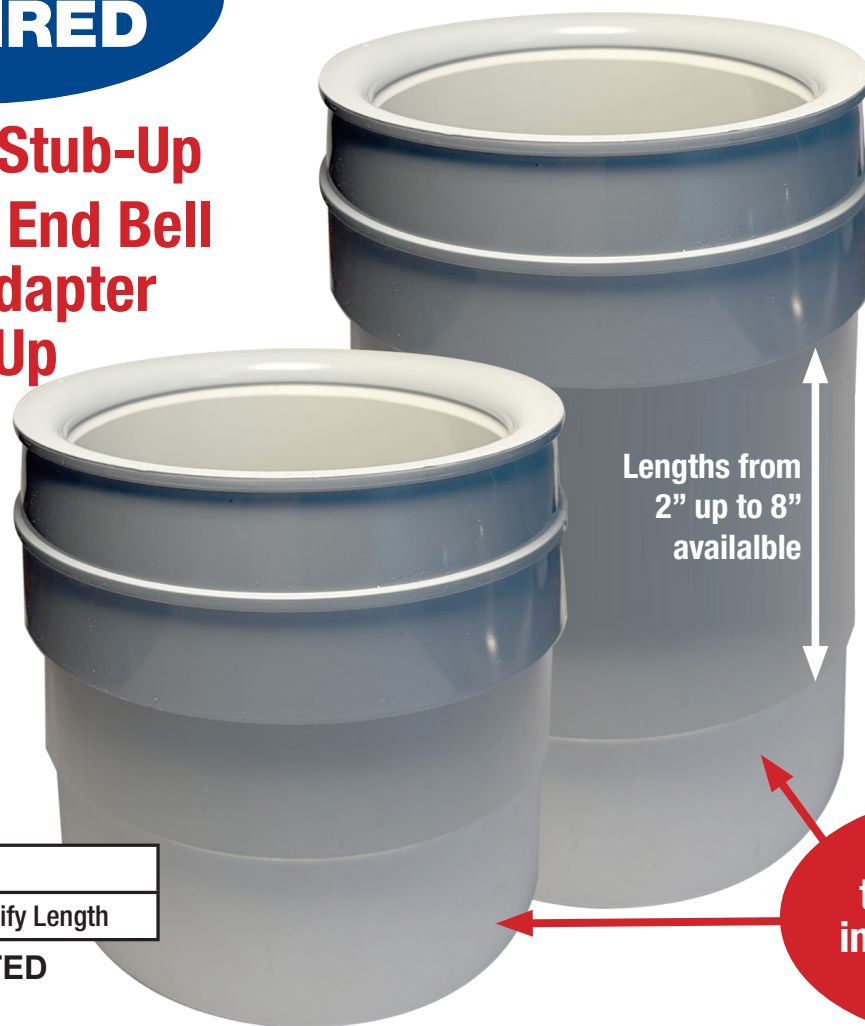

Lengths from
2" up to 8"
available

**Tapered PVC
to be inserted
into reamed-out
PVC Conduit**

Catalog #	Size
PEBA-LEB	Specify Length

PATENTED

SP PRODUCTS, INC.
Productivity and value thru ideas



**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE




730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP14b

Schedule 40 & 80

PVC Reaming Bits for Transition Couplings

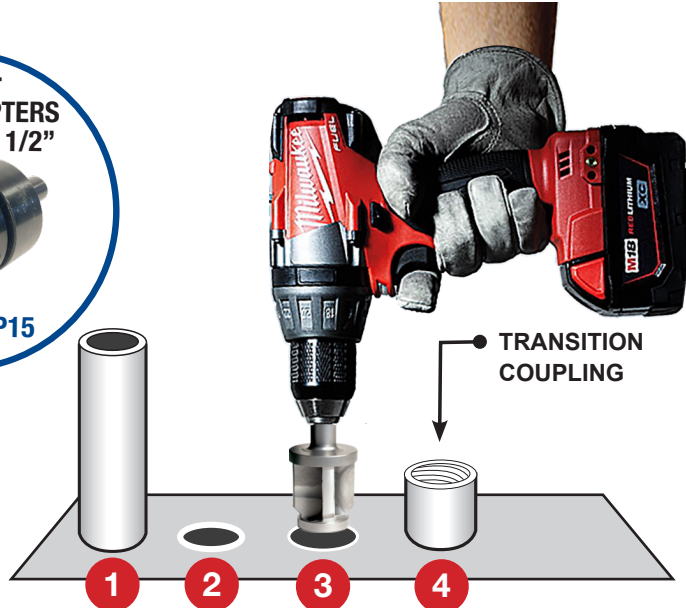

- 1-PVC Stub-Up
- 2-Cut Stub-Up flush to slab
- 3-Ream out PVC
- 4-Install required transition coupling


1-Piece

Larger sizes available on special order

1/2" thru 6"

1/2" thru 4"
1/2" Chuck

5" & 6"
3/4" Chuck

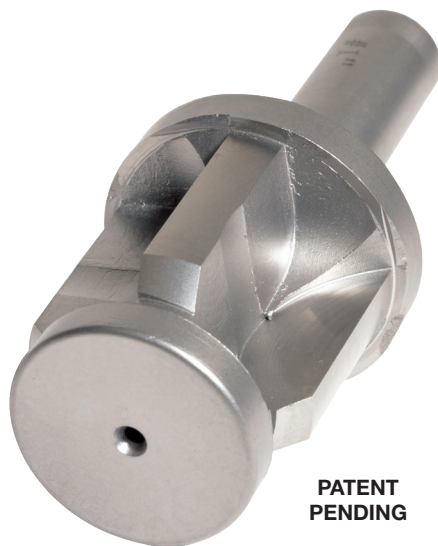

**High Quality Steel
Sharpenable for
Long Life**

PVC Conduit Size	SCH 40 PVC Catalog #	PVC Conduit Size	SCH 40 PVC Catalog #
1/2"	IPRB50-SCH 40	2-1/2"	IPRB250-SCH 40
3/4"	IPRB75-SCH 40	3"	IPRB300-SCH 40
1"	IPRB100-SCH 40	3-1/2"	IPRB350-SCH 40
1-1/4"	IPRB125-SCH 40	4"	IPRB400-SCH 40
1-1/2"	IPRB150-SCH 40	5"	IPRB500-SCH 40
2"	IPRB200-SCH 40	6"	IPBR600-SCH 40

**PLEASE SPECIFY IF USING FOR
SCH 40 OR SCH 80**

PVC Conduit Size	SCH 80 PVC Catalog #	PVC Conduit Size	SCH 80 PVC Catalog #
1/2"	IPRB50-SCH 80	2-1/2"	IPRB250-SCH 80
3/4"	IPRB75-SCH 80	3"	IPRB300-SCH 80
1"	IPRB100-SCH 80	3-1/2"	IPRB350-SCH 80
1-1/4"	IPRB125-SCH 80	4"	IPRB400-SCH 80
1-1/2"	IPRB150-SCH 80	5"	IPRB500-SCH 80
2"	IPRB200-SCH 80	6"	IPBR600-SCH 80

NO PARTS TO LOSE ON THE JOB SITE!

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC
Productivity and value thru ideas



**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP15

Chamfer Bits

for SCH 40/80 PVC Conduits



Conduit reaming tool smooths wall of conduit with a 30° chamfer around all 360° of conduit to eliminate sharp edges to prevent wire damage and to receive mandrel for wire pull.

Meets utility requirements.
Tool works for both Schedule 40 & 80 .




See Our
CHUCK ADAPTERS
from 3/4" to 1/2"



See page IP15

1-Piece


Larger sizes available
on special order
1/2" thru 6"

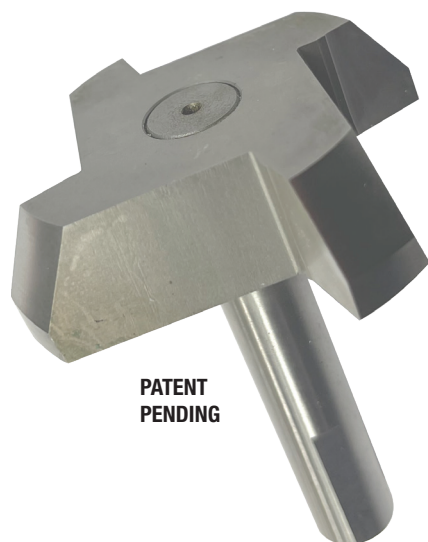

PATENT
PENDING



Smooth Beveled Edge
after Chamfering



< Conduit Before

1/2" thru 4"
1/2" Chuck

5" thru 8"
3/4" Chuck

PVC Conduit Size	SCH 40/80 Catalog #	PVC Conduit Size	SCH 40/80 Catalog #
1/2"	CHRB50-SCH 40/80	3"	CHRB300-SCH 40/80
3/4"	CHRB75-SCH 40/80	3-1/2"	CHRB350-SCH 40/80
1"	CHRB100-SCH 40/80	4"	CHRB400-SCH 40/80
1-1/4"	CHRB125-SCH 40/80	5"	CHRB500-SCH 40/80
1-1/2"	CHRB150-SCH 40/80	6"	CHRB600-SCH 40/80
2"	CHRB200-SCH 40/80	8"	CHRB800-SCH 40/80
2-1/2"	CHRB250-SCH 40/80		

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC
Productivity and value thru ideas



PATENT PENDING
PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP15a




Chuck Adapter

From 3/4" to 1/2"



**Perfect for use
with SP Products'
5" thru 8" Drivers,
Reamers, and
Chamfer Bits**

IP15



SP's 5" & 6"
PVC Reaming Bit

IP15a




SP's 5", 6" & 8"
PVC Chamfer Bit

IP2b



SP's 5" & 6"
PVC Driver

IP16

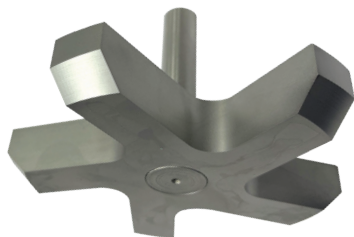


SP's 5", 6" & 8"
PVC Chamfer Bit

**1/2"
Chuck**

**Insert adapter's
1/2" chuck into
drill and secure.**

**Loosen set screws to receive
3/4" chuck on drill. Retighten
set screws for use with the
3/4" chuck on larger reamers,
chamfers and drivers.**

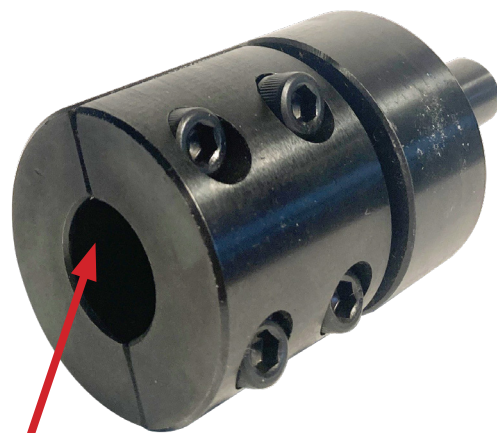

**3/4" Chuck
Adapter Sleeve**

Chuck Adapter

Size	Catalog #
1/2"	CA 75-50

SP PRODUCTS, INC
Productivity and value thru ideas



**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP15b



Chamfer Bits for Aluminum & Galvanized Rigid Conduit



Deburs at any location

Provides smooth chamfer


Safer, Better & Faster

Works with any type of
drill with 1/2" chuck

See Our
CHUCK ADAPTERS
from 3/4" to 1/2"



See page IP15

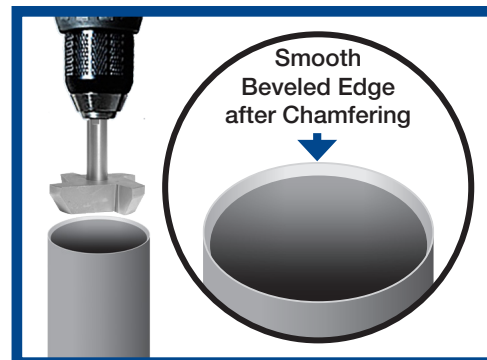


Catalog #	Conduit Size
ALCE-50-75-100	1/2"-3/4"-1"
ALCE-125-150	1-1/4"-1-1/2"
ALCE-200-250	2"-2-1/2"
ALCE-300-350	3"-3-1/2"
ALCE-400	4"
ALCE-500	5"
ALCE-600	6"
ALCE-800	8"
RGDC-500	5"
RGDC-600	6"

4 Lobes

Conduit Sizes
1/2" thru 2-1/2"

1/2" thru 4"
1/2" Chuck

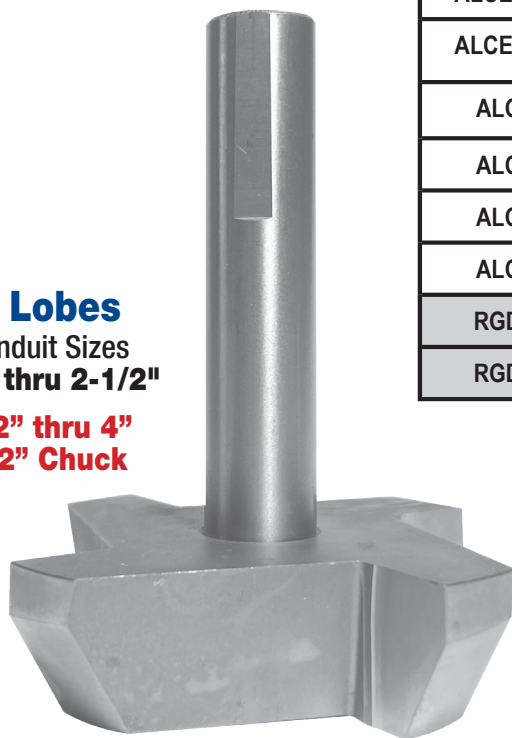


PATENT
PENDING

5 Lobes

Conduit Sizes
3" thru 8"

5" thru 8"
3/4" Chuck

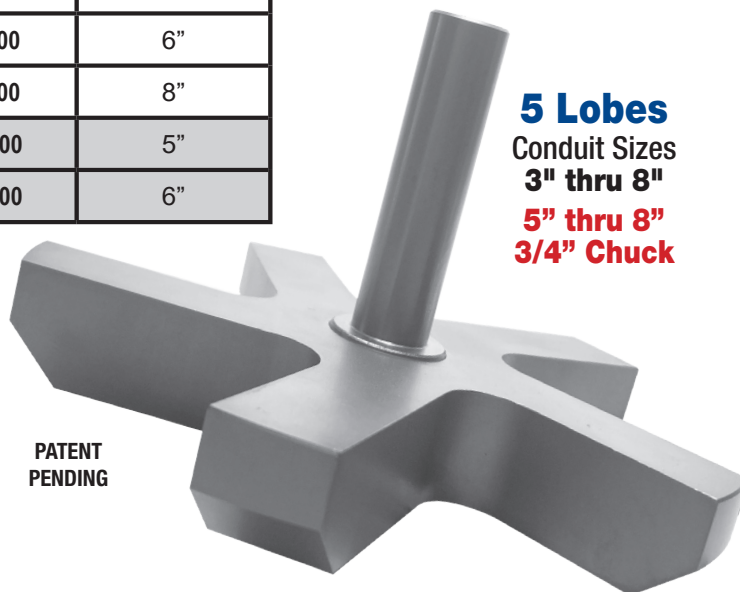

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC.
Productivity and value thru ideas



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP16



No Center Stop Slide On Couplings

Joins Conduit Lengths in Difficult Situations


NEW

Allows flexibility of movement for fast, easy installation of conduit in tight, difficult situations.

PATENT PENDING

UL LISTED FOR 3/4, 1, 2 & 4 inch
UL514B & CSA C22.2 No. 18.3
(other sizes pending)

Completely smooth inside diameter with smooth bottomed adjustable center screw. No sharp edges to damage wire during pull.

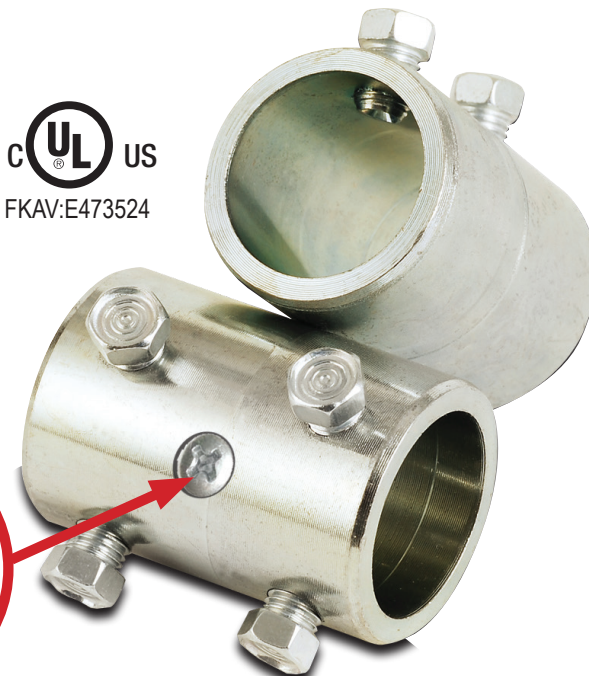

1. Slide coupling over end of one conduit
2. Line up 2nd conduit and mark it to allow coupling to be slid back and centered over both conduits.
3. Slide coupling back to mark.
4. Tighten $\frac{3}{8}$ " hex head bolts and conduits are securely joined together at center of coupling.
5. Size $\frac{1}{2}$ thru 2 inch = one bolt
sizes $2\frac{1}{2}$ and larger = 2 bolts
at a 45° angle on each end

SIZE	CAT#	SIZE	CAT#
1/2"	NCSC-50EMT	2"	NCSC-200EMT
3/4"	NCSC-75EMT	2-1/2"	NCSC-250EMT
1"	NCSC-100EMT	3"	NCSC-300EMT
1-1/4"	NCSC-125EMT	3-1/2"	NCSC-350EMT
1-1/2"	NCSC-150EMT	4"	NCSC-400EMT

(Rigid Conduit Version Available Soon - Consult Factory)

Prevent Injury and Save Hours

Customer must satisfy all codes and owners' specifications.



**PATENT PENDING
PATENTED**



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com




IP17

Masonry Box Brackets

For 6, 8, 10 & 12 inch depth block walls




Strong 18 Gauge Galvanized Steel
Heat Treated or Stainless Steel also available

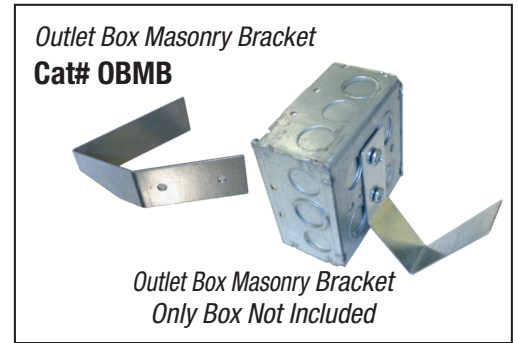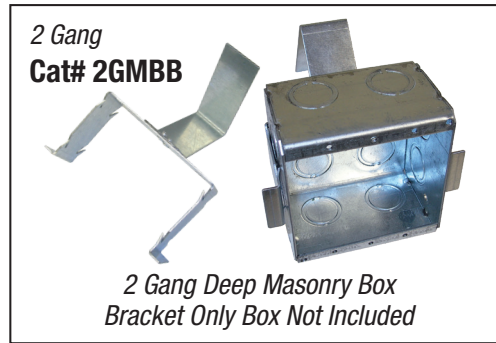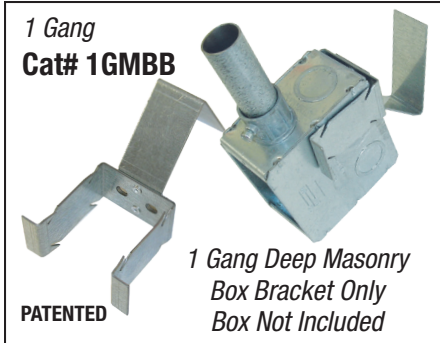


Customer must specify complete catalog numbers when ordering

- Bracket with box and connectors attached available as assembly
- Snaps on Box in seconds and firmly secures it in place.
- Taping available to keep water or mud out of box.
- Eliminate time lost, and code violations when water and mud enter the box plus aggravation when attempting to keep boxes properly aligned with glue, sticks, crushed paper, etc. and not solve the problem.

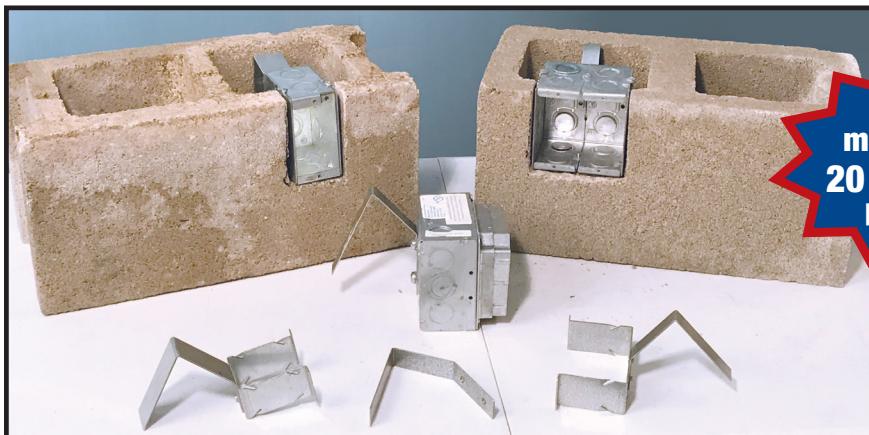

**Save
more than
20 minutes
per box**



**Brackets allow installing
ground screws in back of box**

Masonry Box Brackets		
Box	Depth	Catalog #
1 Gang	6 inch	1GMBB-6
1 Gang	8 inch	1GMBB-8
1 Gang	10 inch	1GMBB-10
1 Gang	12 inch	1GMBB-12
2 Gang	6 inch	2GMBB-6
2 Gang	8 inch	2GMBB-8
2 Gang	10 inch	2GMBB-10
2 Gang	12 inch	2GMBB-12
Outlet	6 inch	OBMB-6
Outlet	8 inch	OBMB-8
Outlet	10 inch	OBMB-10
Outlet	12 inch	OBMB-12

Customer must satisfy all codes and owners' specifications.



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE




730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP18

Adjustable Back Box Support



**Extremely Strong & Fast Installation
Snaps Onto Box in Seconds**

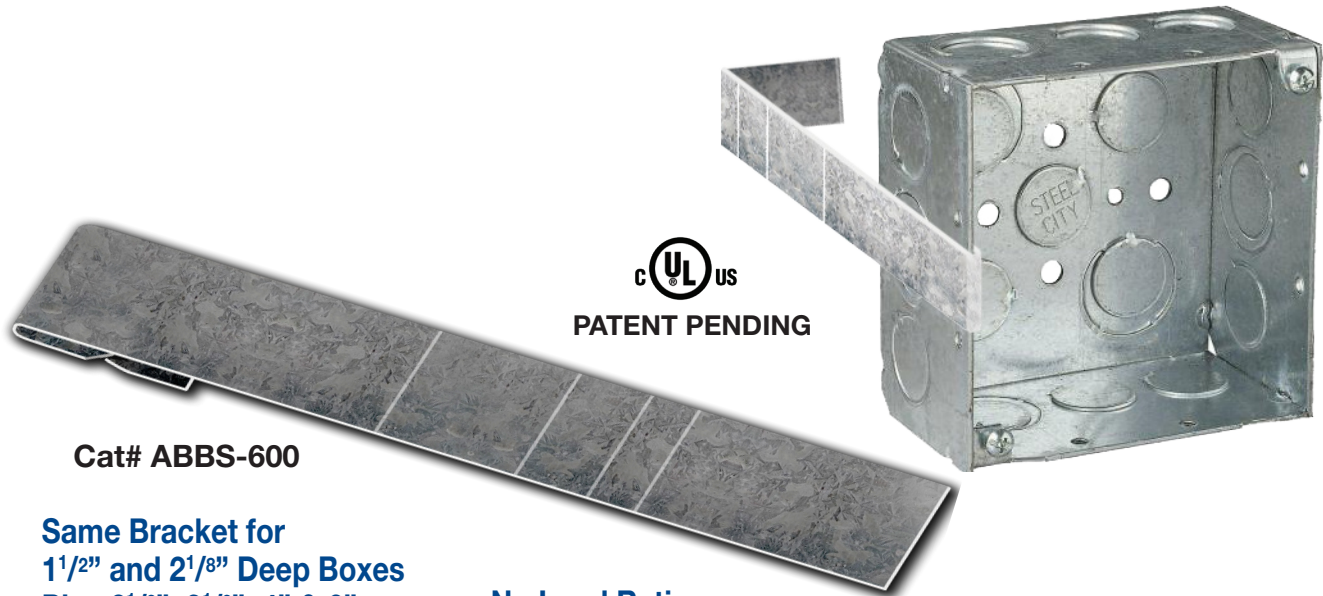


Cat# ABBS-600

Same Bracket for
1 1/2" and 2 1/8" Deep Boxes
Plus 2 1/2", 3 1/2", 4" & 6"
Stud Wall Depths

22 Gauge Galvanized or
Stainless Steel

No Load Rating
(for Position Only)

Standard Package Quantity
100 pcs. per Box

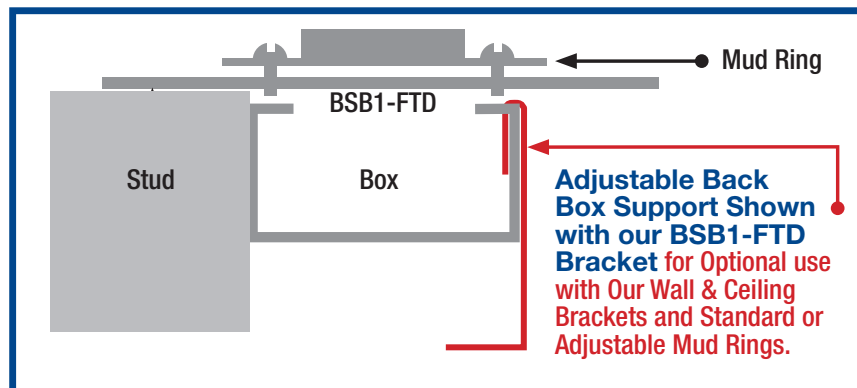

**Compatible for Use with Our
"Big O" and Fixed Position Brackets**

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC.
Productivity and value thru ideas



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP18a



4-Conduit Block

Support From Only One Rod



**Threaded Block
for Vertical Rod**

OR

**Threadless Block
for Vertical Rod**

For Vertical Rod 1/4", 3/8" or 1/2"

*Specify bolt size 1/4" or 3/8"
required for the conduit clamp*

ST=(side thread) 1/4" or 3/8"

*Bolt Hex
Head Slides
into Slot*

*Bolt Hex
Head Slides
into Slot*

**Standard Slots 1/4"
3/8" Available Upon Request**


PATENTED

PATENTED

THREADED BLOCK	NON-THREADED BLOCKS
1/4 inch rod = Cat# TBT25-ST25	1/4 inch rod = Cat# TBT25-NT-ST25
1/4 inch rod = Cat# TBT25-ST38	1/4 inch rod = Cat# TBT25-NT-ST38
 DWSD - Electrical Mechanical and HVAC Suspension System Accessories	
THREADED BLOCK	NON-THREADED BLOCKS
3/8 inch rod = Cat# TBT38-ST25	3/8 inch rod = Cat# TBT38-NT-ST25
3/8 inch rod = Cat# TBT38-ST38	3/8 inch rod = Cat# TBT38-NT-ST38
1/2 inch rod = Cat# TBT50-ST25	1/2 inch rod = Cat# TBT50-NT-ST25
1/2 inch rod = Cat# TBT50-ST38	1/2 inch rod = Cat# TBT50-NT-ST38



SEE WEBSITE
VIDEO **IP19**

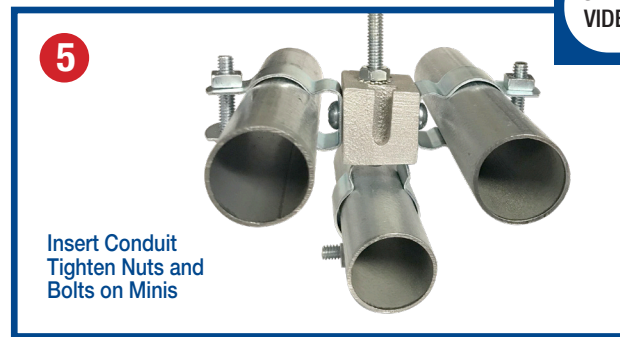

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC
Productivity and value thru ideas



**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP19




4-Conduit Block



Support From Only One Rod



For Threaded
Vertical Rod
1/4", 3/8" or 1/2"

Specify Bolt Size
1/4" or 3/8"
Required for the
Conduit Clamp

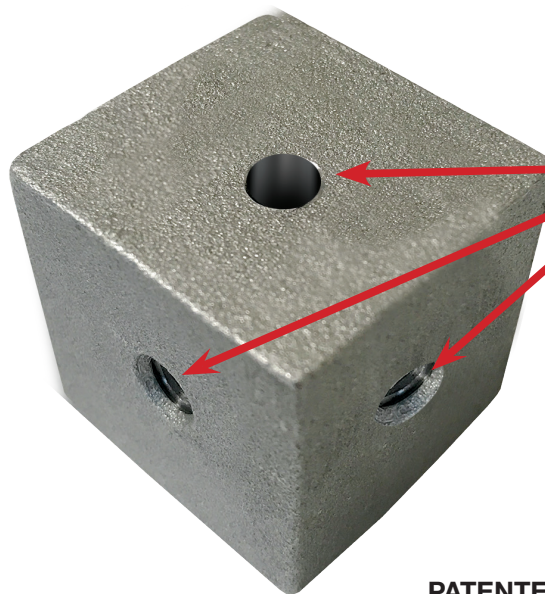

4 threaded
holes on
4 sides
(no slots)

PATENTED

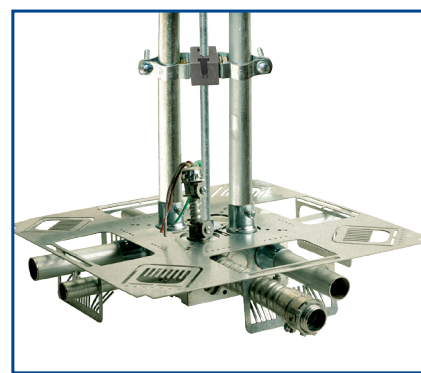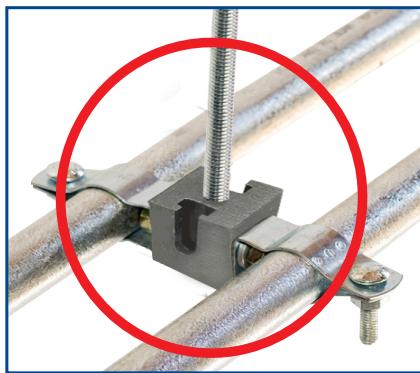

Install larger conduit overhead
with our patented 4 conduit
threaded support block.

THREADED BLOCK

1/4 inch rod = Cat# TBT25-ST25

1/4 inch rod = Cat# TBT25-ST38

3/8 inch rod = Cat# TBT38-ST25

3/8 inch rod = Cat# TBT38-ST38

1/2 inch rod = Cat# TBT50-ST25

1/2 inch rod = Cat# TBT50-ST38

NON-THREADED BLOCKS

1/4 inch rod = Cat# TBT25-NT-ST25

1/4 inch rod = Cat# TBT25-NT-ST38

3/8 inch rod = Cat# TBT38-NT-ST25

3/8 inch rod = Cat# TBT38-NT-ST38

1/2 inch rod = Cat# TBT50-NT-ST25

1/2 inch rod = Cat# TBT50-NT-ST38

Customer must satisfy all codes and owners' specifications.



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP20



Box Support Rod Cubes



Support From Only One Rod



4 thru holes
for Gripper
applications

(RC) 3/8" & 1/4"
hole for threaded
& non-threaded rod

(ST) 1/4" or 3/8"
threaded side hole
for threaded rod,
clamps or other supports

Non-Threaded Box Support Rod Cubes

1/4 inch Rod = Cat# RC25NT-ST25

1/4 inch Rod = Cat# RC25NT-ST38

3/8 inch Rod = Cat# RC38NT-ST25

3/8 inch Rod = Cat# RC38NT-ST38

Threaded Box Support Rod Cubes

1/4 inch Rod = Cat# RC25-ST25


1/4 inch Rod = Cat# RC25-ST38

3/8 inch Rod = Cat #RC38-ST25

3/8 inch Rod = Cat #RC38-ST38



Support two conduits with clamps
using 1/4" threaded holes on the
sides of the Box Support Rod Cubes.

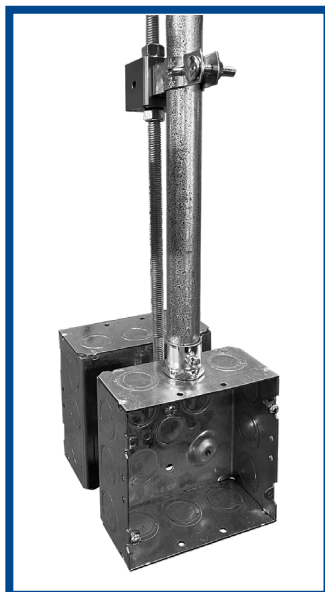

Install 2 boxes back to back
with our Box Support Rod Cubes
from a single threaded rod.



Compatible with Gripper cable
applications to secure light fixtures.



Use Box Support Rod Cubes
with J-Hangers

Versatile use for all trades!

Customer must satisfy all codes and owners' specifications.



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP20a



Support Hangers


for Cable Tray, Pipe, Conduit, Light Fixtures and Other Heavy Equipment

Safer – Better – Faster

**Eliminates climbing and working above trusses.
Install in seconds while standing on deck below.**

CAT#	UPPER CHORD
THUC 38	3/8" 1,200 lb Static Load Rating
THUC 50	1/2" 1,200 lb Static Load Rating

CAT#	LOWER CHORD
THLC 38	3/8" 1,200 lb Static Load Rating
THLC 50	1/2" 1,200 lb Static Load Rating

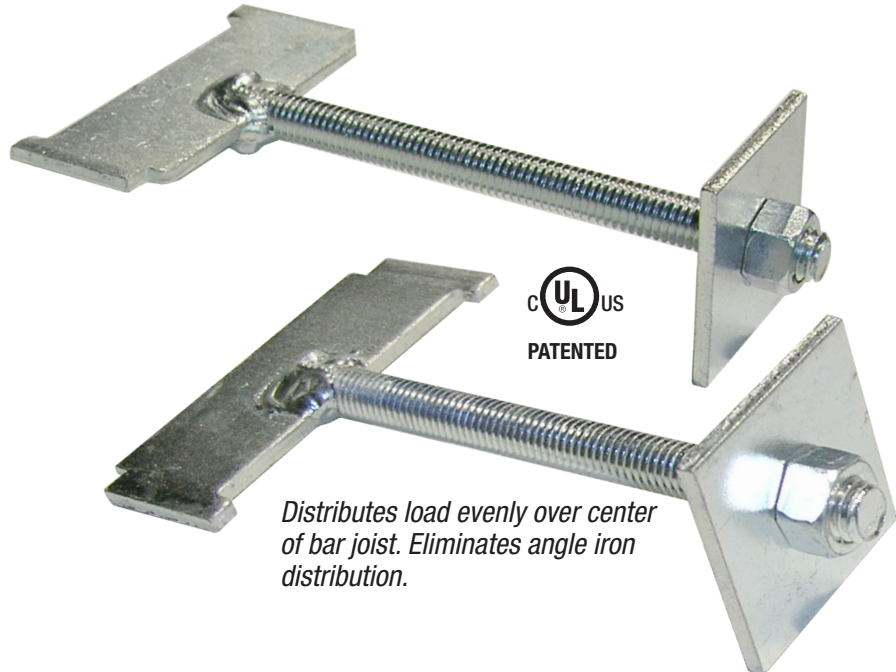

Distributes load evenly over center of bar joist. Eliminates angle iron distribution.

CAT#	KEPS®
THW 38	3/8"
THW 50	1/2"



One piece KEPS® integrated nut/washer firmly locks into chord.

Provides rigid seismic restraint.

Seismic bracing not required when used in top chord applications (9.3.5.3.8 NFPA 13)

Meets UL 514A& CSA C22.2 No. 18.1

Suitable for Supporting Electrical, Fire Suppression, Plumbing, and HVAC Applications in Open Web Bar Joists

Customer must satisfy all codes and owners' specifications.



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP21

QwikBlock Box Support




NEW

**Hot Dipped
Galvanized
Steel**

**Saves
More Than
15
Minutes Per
Installation**

Attach to box with
(2) 1/4" - 20 x 1/2"
machine screw.

PATENT
PENDING

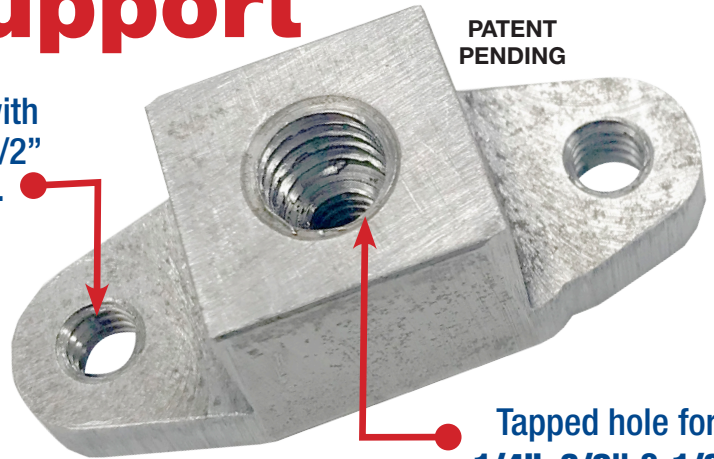

Tapped hole for
1/4", 3/8" & 1/2"
threaded rod.


- Accepts 4", 4 11/16" & 5" boxes
- Automatically centers rod
- 1 Nut to lock rod in place
- Eliminates 2 washers, 1 nut and knockout of center KO on back of box
- Install on box with or without plate

Use
4-Conduit Block
(IP19 or IP20)
with QwikBlock
(IP21A)



DWSD - Electrical Mechanical
and HVAC Suspension System
Accessories

SEE WEBSITE
VIDEO **IP21a**

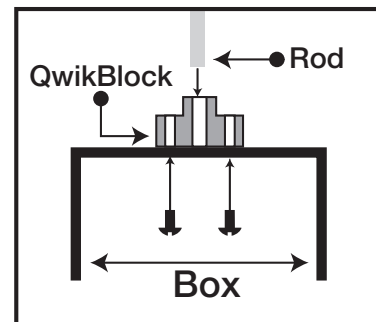

CAT#	QWIKBLOCK
QBBS-25/38	1/4" & 3/8" Threaded Rod
QBBS-50	1/2" Threaded Rod

**Works with Our Entire Line of Conduit and
Box Support Plates for Fast and Easy Installation**

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC
Productivity and value thru ideas



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP21a

Stub Up Slip Coupling



Allows flexibility of movement, slide down over conduit and bolt in place to set Transformers and Gear, Nipple up to Panels etc.

1/2 thru 4 inch Rigid Heavy Wall and PVC Conduit Stubs

SIZE	CAT#
1/2"	SOHWTC 50
3/4"	SOHWTC 75
1"	SOHWTC 100
1-1/4"	SOHWTC 125
1-1/2"	SOHWTC 150
2"	SOHWTC 200
2-1/2"	SOHWTC 250
3"	SOHWTC 300
3-1/2"	SOHWTC 350
4"	SOHWTC 400



PATENTED

Slide on coupling with 5 female threads receive conduit or connectors and 10 male threads for two lock nuts and a ground bushing also available.

- One $\frac{3}{8}$ inch Hex Head Bolt at bottom position for size $\frac{1}{2}$ thru 2 inch Two bolts at a 45° angle for sizes 2½ thru 5 inch
- Bolts can be specifically located at any point to allow greater flexibility

**Safer Installation – Save Hours
Difficult Jobs are Done in Minutes**

Customer must satisfy all codes and owners' specifications.



**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP22


Original Cinch Clamp



Since 1973




- Installed quickly (50% labor savings)
- Competitively Priced
- High strength/heavy duty hot-dipped
- 10-gauge galvanized steel wire.

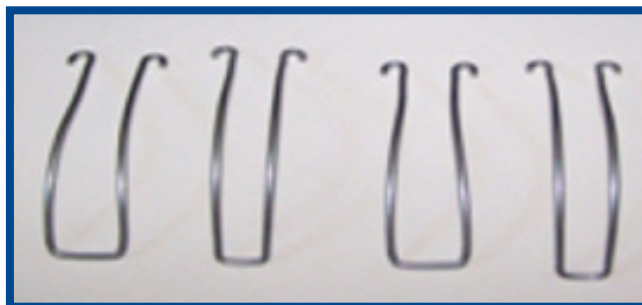

- Only Blade Screwdriver Needed
- Use with all strut type channel
- Securely fits EMT, Rigid, IMC, PVC and pipe
- Also available in stainless steel
- Sizes 1/2 thru 4 inch

Only 1 Flat Blade Screwdriver Needed
Eliminates Wrenches Nuts and Bolts

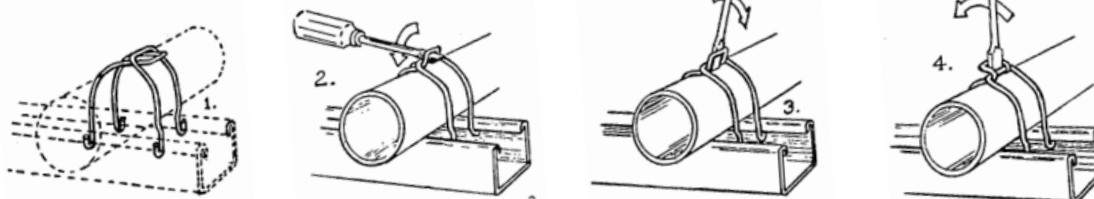

Original Cinch Load Ratings

Trade Size	Metric Designator	Cinch Clamp E-100 Electrical Metallic Tubing (EMT)	Cinch Clamp P-200, SS-300 Rigid Metal Conduit (RMC) Intermediate Metal Conduit (IMC)		Cinch Clamp P-200, SS-300 Rigid PVC Conduit	
		LOAD RATING (lb) Horizontal (Alternate Nomenclature)	LOAD RATING (lb) Horizontal P-200 (Alternate Nomenclature)	LOAD RATING (lb) Horizontal SS-300 (Alternate Nomenclature)	LOAD RATING (lb) Horizontal P-200 (Alternate Nomenclature)	LOAD RATING (lb) Horizontal SS-300 (Alternate Nomenclature)
1/2"	(16)	333(E-12)	333(P-12)	333(P-12)	333(P-12)	333(P-12)
3/4"	(21)	100(E-34)	333(P-34)	333(P-34)	333(P-34)	333(P-34)
1"	(27)	333(E-100)	100(P-100)	333(P-100)	100(P-100)	333(P-100)
1-1/4"	(35)	333(E-114)	333(P-114)	333(P-114)	333(P-114)	333(P-114)
1-1/2"	(41)	333(E-112)	100(P-112)	333(P-112)	100(P-112)	333(P-112)
2"	(53)	333(E-200)	100(P-200)	333(P-200)	100(P-200)	333(P-200)
2-1/2"	(63)		333(P-212)	333(P-212)	333(P-212)	333(P-212)
3"	(78)		333(P-300)	333(P-300)	333(P-300)	333(P-300)
3-1/2"	(91)		333(P-312)	333(P-312)	333(P-312)	333(P-312)
4"	(103)		333(P-400)	333(P-400)	333(P-400)	333(P-400)

Horizontal support intervals are limited to 3.05 m (10 ft) maximum.
Suitable for use in plenums.

INTENDED MOUNTING ORIENTATION - HORIZONTAL

Catalog #	Size	EMT OD	PIPE OD	Load	Load SS*
CC-50	1/2"	.706	.840	333 lbs	333 lbs
CC-75	3/4"	.922	1.050	100 lbs	333 lbs
CC-100	1"	1.163	1.315	333 lbs	100 lbs
CC-125	1 1/4"	1.510	1.660	333 lbs	333 lbs
CC-150	1 1/2"	1.740	1.900	333 lbs	100 lbs
CC-200	2"	2.197	2.375	333 lbs	100 lbs
CC-250	2 1/2"	NA	2.875	NA	333 lbs
CC-300	3"	NA	3.500	NA	333 lbs
CC-350	3 1/2"	NA	4.000	NA	333 lbs
CC-400	4"	NA	4.500	NA	333 lbs

*SS = Stainless Steel

Quick Application Saves Time and Money!

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC
Productivity and value thru ideas



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE




730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP23

Box Support Bracket for Fire Alarm, Speakers, Strobes, etc.



8 Inches on Center (as shown)
12 Inches on Center (available upon request)

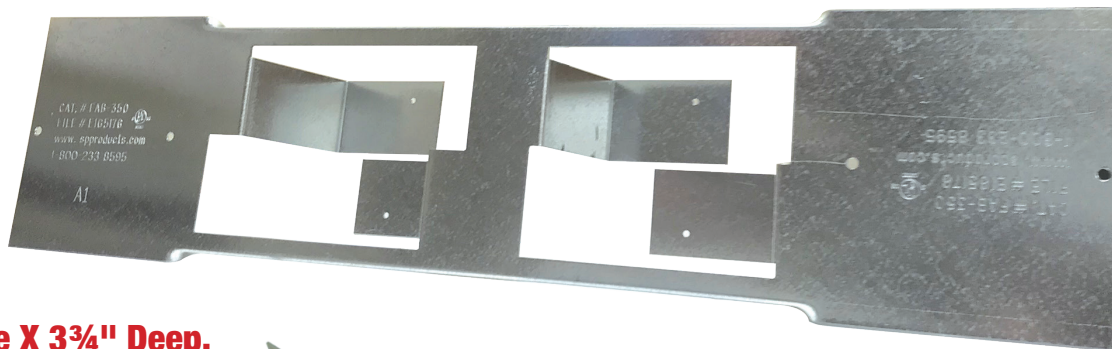

Accepts

**3¾" Square X 3¾" Deep,
4" Square X 2⅞" Deep AND
4" Square X 3¾" Deep Boxes.**

**Ideal for installing in one or
two layers of drywall or when
adding paneling.**

CAT#

FAB-350

16" thru 24" thru Stud Spacing

16 Gauge Galvanized or Stainless Steel

- Wide Flanges allow supporting boxes in from 15 thru 25 inches stud span.
- Strong 16 gauge galvanized or stainless steel will not bend or bow during installation.
- Quantity discounts and **LABOR ONLY ORDERS** with wiring assemblies installed (customer supplies material other than SP propriety items) available for greater savings.

**Save More
Than 30 MINUTES
with a Perfect
Installation
Every Time!**



Box Available
as a Separate Item

**Also available with or without 1 piece
3-½" deep red painted boxes**

Customer must satisfy all codes and owners' specifications.



C UL US

**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP24


Original "Big O"



Indented Box Support Bracket

Mount Boxes and Move Them to Any Location Between Studs

Save More Than 30 MINUTES with Perfectly Level Installation

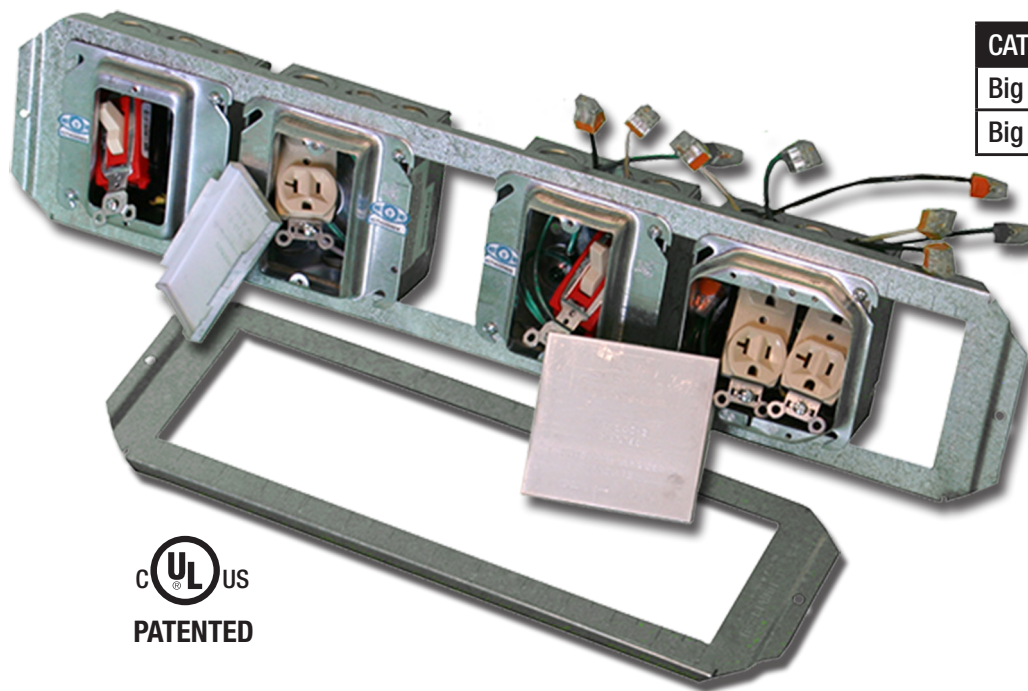


CAT#	BIG "O"	Qty/Box	Wt.
Big O-16	16" Stud Spacing	50	22 lbs
Big O-24	24" Stud Spacing	50	33 lbs

20 Gauge Galvanized or Stainless Steel

- Built in ruler top and bottom flange marked every 1/4 inch allows fast, accurate bench loading
- Mount 4 or 4-11/16" square shallow or deep boxes at any location just loosen two screws to quickly relocate boxes without removing them
- Strong 20 gauge galvanized
- Brackets available with wiring device assemblies attached if components are not specified manufacturers' equals will be supplied.

Mud Ring Sandwiches Box to Bracket

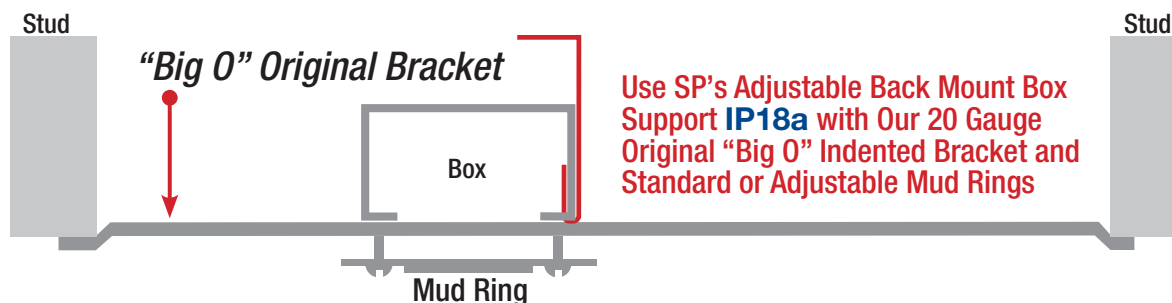

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC
Productivity and value thru ideas



**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP25




"Big O" Flat

Box Support Bracket

for Stud Walls



Flat version allows bracket to be slid left or right over face of studs for adjustment if necessary and installed with only 1 screw at each end plus enables boxes to be slid left or right to any location between studs.

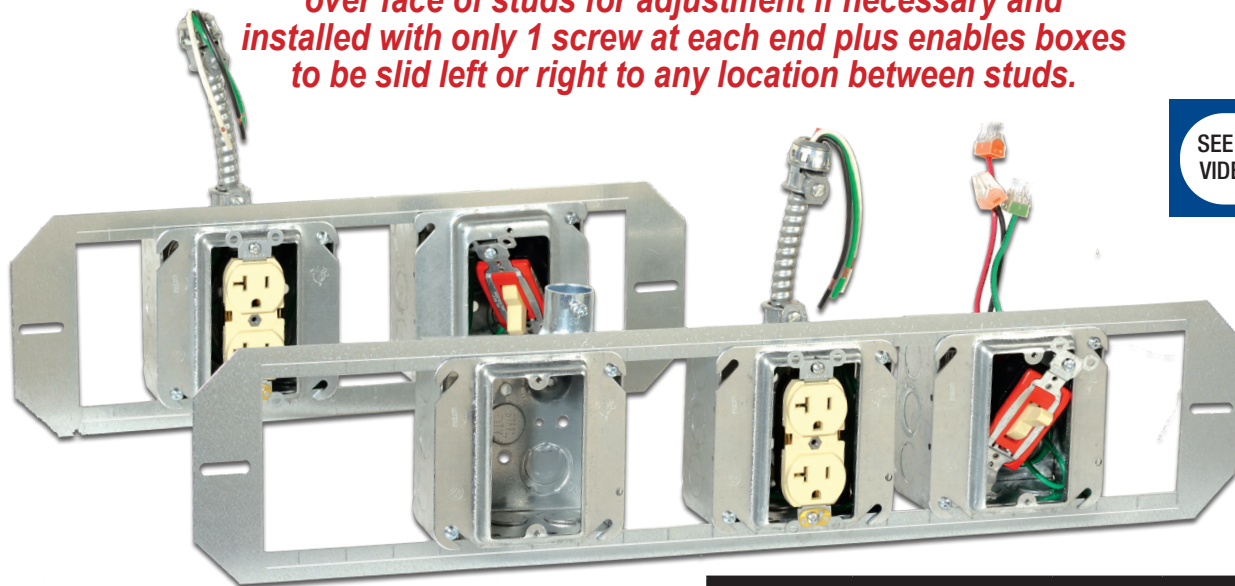


Extra strong 16 gauge galvanized or stainless steel to avoid bending or bowing during installation.

"BIG O" Flat Box Support Bracket			
16 Gauge Galvanized or Stainless Steel			
CAT#	Description	Qty/Box	Weight
Big O-16F	16" Stud Spacing	50	22 lbs.
Big O-24F	24" Stud Spacing	50	35 lbs.



- Extra strong 16 gauge galvanized or stainless steel to avoid bending or bowing during installation.
- Install **4"**, **4 11/16"** and **5"** square boxes, then quickly slide left or right to any location between studs.
- Completely flat with NO 1/4" returns on top and bottom of entire width or 3/16" deep offsets at each end.

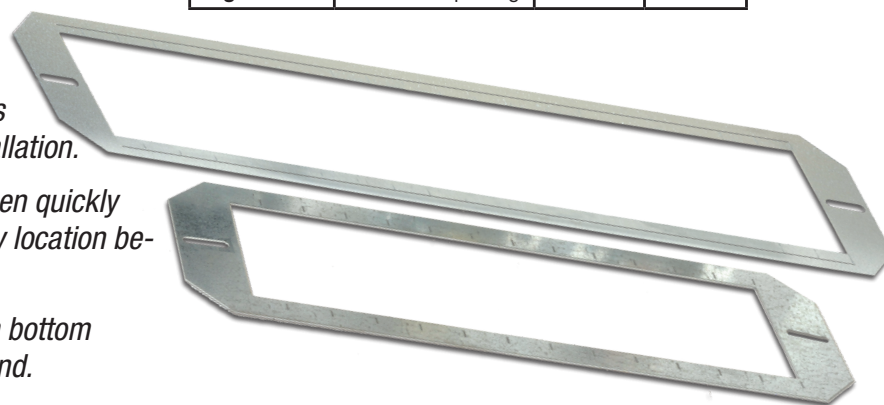

Mud Ring Sandwiches Box to Bracket

Customer must satisfy all codes and owners' specifications.



PATENT PENDING
PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP26

Dual Wall Box Support



**Save More
Than 30 MINUTES
with a Perfect
Installation
Every Time!**

Install Only 1 vs 2 Supports

Slots at each end allows bracket to be slid left or right over face of studs for adjustment and allows installation with only 1 screw at each end

Suitable for 1-1/2" Deep Boxes


Cat# DSBSWB-24 24" Stud Spacing

supports 2 boxes facing opposite directions on each side of a common wall.

Cat# DSBSWB-16 16" Stud Spacing


supports 2 boxes on one wall and one in the next room

16 Gauge Galvanized or Stainless Steel

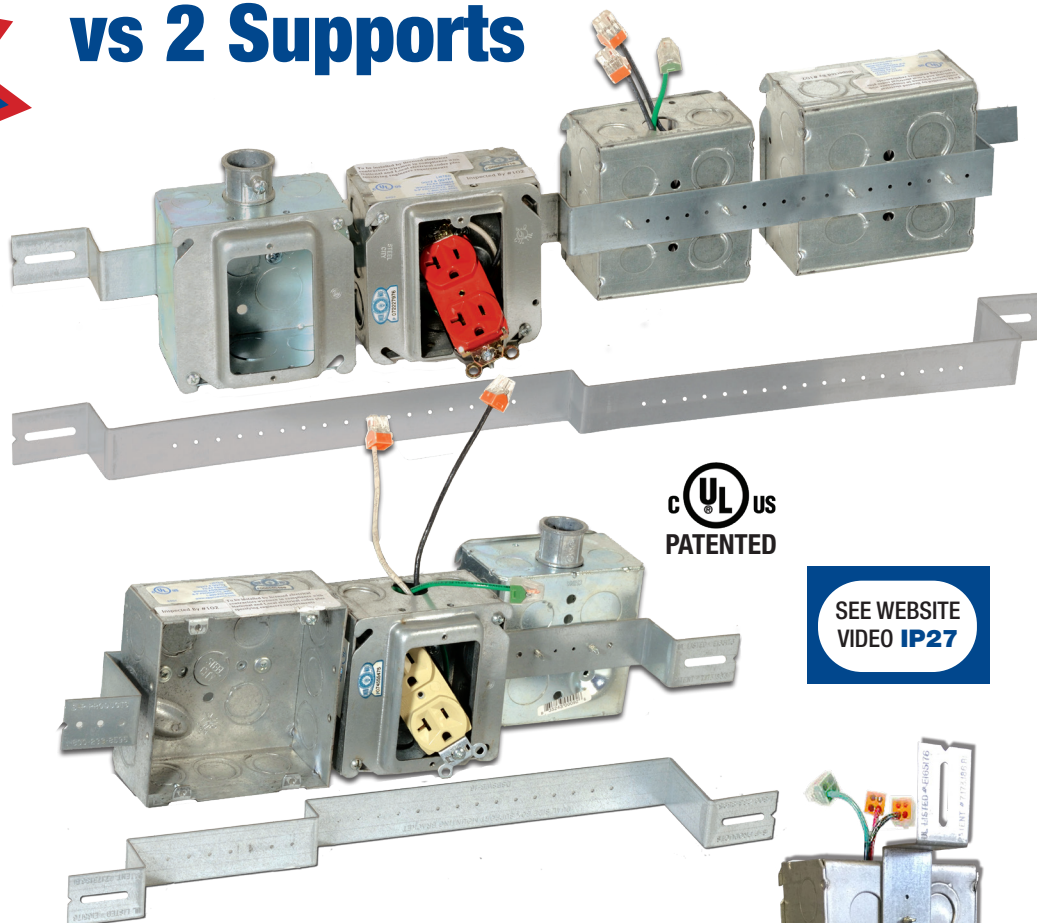

**c UL US
PATENTED**

**SEE WEBSITE
VIDEO IP27**

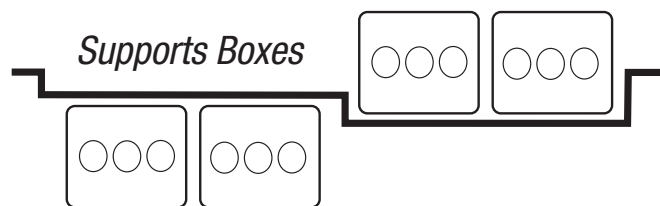

- Holes every 1/2" on center to secure boxes at any location between studs.
- 16 Gauge galvanized or stainless steel
- Brackets available with wiring device assemblies per customer's specifications attached.

Also Supports Boxes Vertically

UL Listed as a Complete Assembly Provided all Components are UL Listed

WALL



Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC
Productivity and value thru ideas



c UL US

**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com



IP27

Box Support Wall Bracket



Slide bracket left or right over studs for adjustment and allows installation with only 1 screw at each end

16 Gauge Galvanized or Stainless Steel

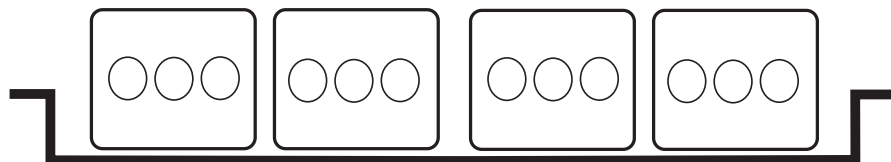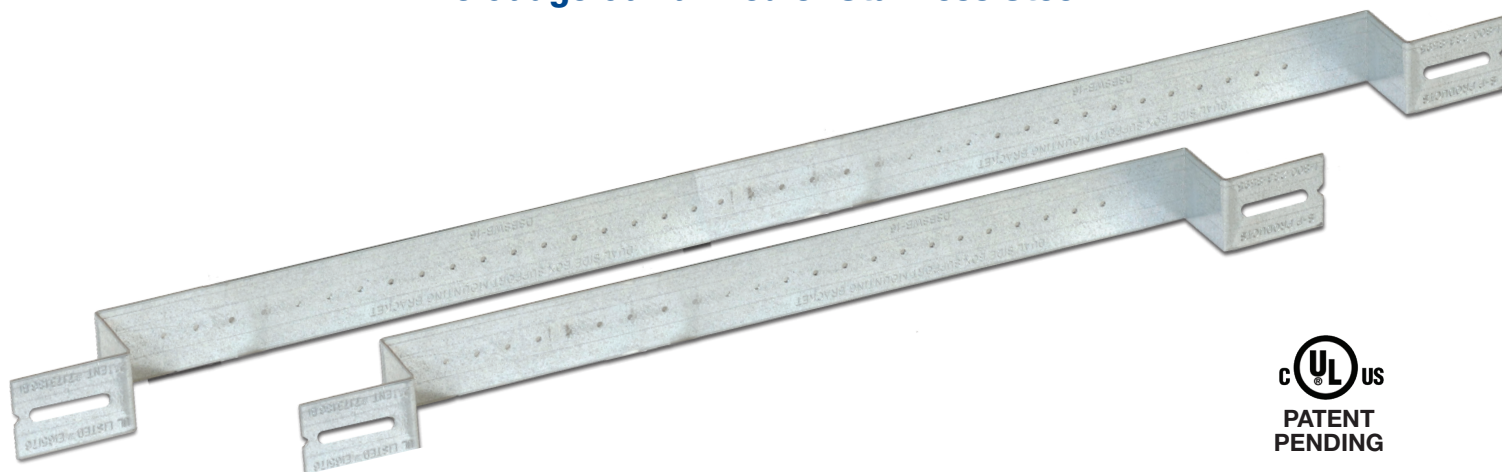

Supports 4", 4¹¹/₁₆" & 5" Square Boxes

Suitable for 1-1/2" Deep Boxes

Cat# CWB-16-178	16" Stud Spacing -1-1/2" Depth
Cat# CWB-24-178	24" Stud Spacing -1-1/2" Depth

Suitable for 2-1/8" Deep Boxes

Cat# CWB-16-218	16" Stud Spacing -1-1/8" Depth
Cat# CWB-24-218	16" Stud Spacing -1-1/8" Depth

Suitable for 3-1/2" Deep Boxes

Cat# CWB-16-278	16" Stud Spacing -3-1/2" Depth
Cat# CWB-24-278	24" Stud Spacing -3-1/2" Depth

Customer must satisfy all codes and owners' specifications.



PATENT PENDING
PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP27a

Electro Post EP-10 Box Support Bracket




**Mounts on all standard stud widths
of 2-1/2", 3-5/8", or 6"**


MOUNTING INSTRUCTIONS

Step 1

Fold bracket to form square tube post and secure by inserting tabs into slots.

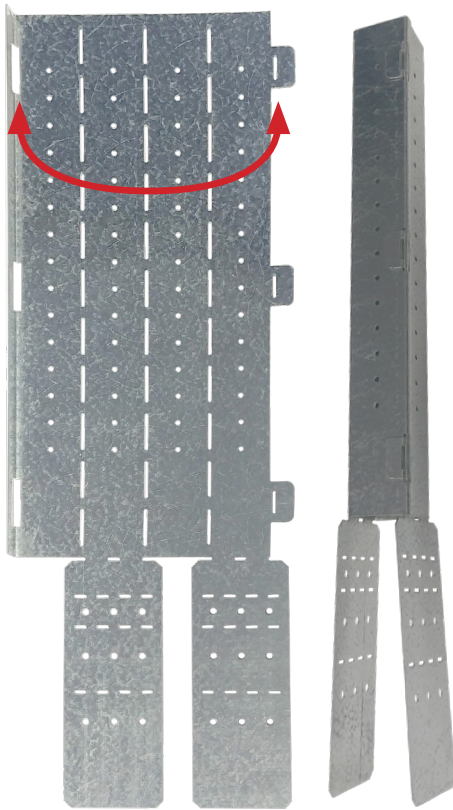

Use with J-Hooks to support low voltage wire runs. Supports up to 16.5 lbs

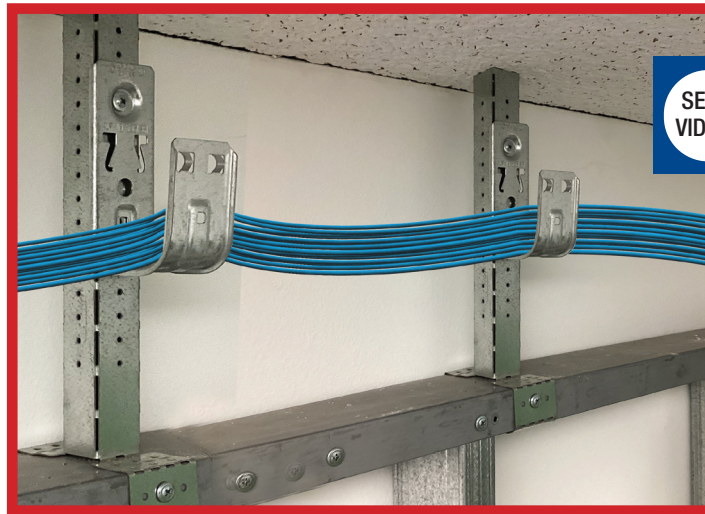

SEE WEBSITE
VIDEO **IP27b**

Step 2

Fold bracket mounting flanges to accommodate wall stud width (2-1/2", 3-5/8", or 6").

Step 3

Attach box(es) to either side of EP-10 with standard fasteners.

Step 4

Bracket can be loaded with 4", 4-11/16", square boxes and assembled with boxes and mud rings as required prior to installation (on stud) in prefab shop or on site.

Step 5

Bracket fastened to intended top plate wall stud directly above a vertical stud with (3) #10-16 min 5/8" long Tek screws on each side of bracket to meet UL listing requirements prior to installation of drywall

- Provides uniform height directly above T-Grid Ceiling.
- Reduces electricians working at higher heights on large ladders.
- Easy accessibility thru ceiling to electrical boxes after completion.
- Product ships flat for shipping ease, 50 pcs. per box/20 lbs.
- Made from 24 gauge galvanized or stainless steel.
- Post folds for installation without use of tools.
- Mount electrical boxes to any side of post.

CAT#	BOX SUPPORT BRACKET
EP-10	2-1/2", 3-5/8" & 6" Studs

24 Gauge Galvanized or Stainless Steel
(50 pcs. per box) 20 lbs

Customer must satisfy all codes and owners' specifications.



**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP27b




Conduit Plug


and ID Tag with Hole for Pull String

Protect and Identify Conduit Runs

- On/Off in seconds
- Prevents mistakes
- No debris enters conduit
- Tab allows changing detailed ID several times
- Accommodates three conduit sizes per plug
- Strong, long lasting, and reusable
- Highly visible bright orange only

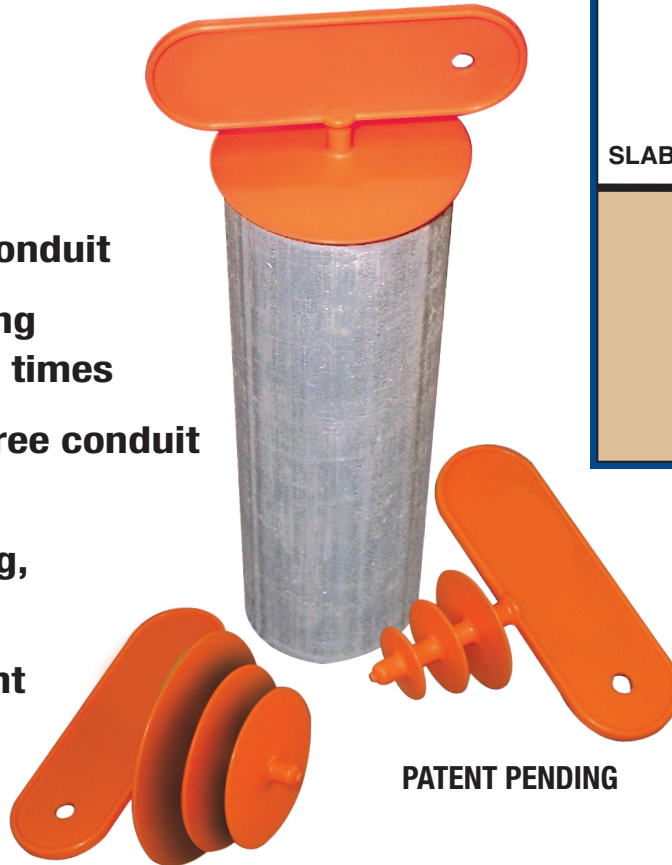

PATENT PENDING

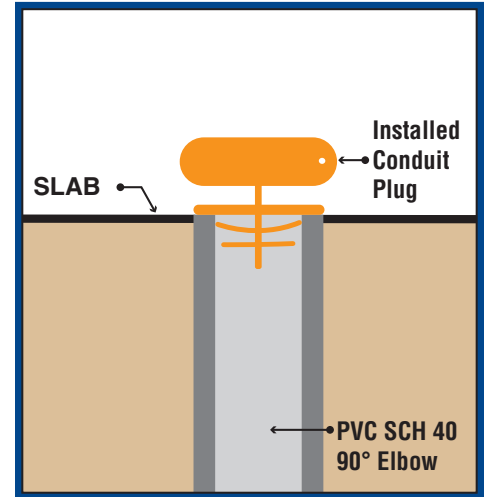

CAT #	SIZE
CP50-75-100	1/2", 3/4", 1"
CP125-150-200	1 1/4", 1 1/2", 2"

Eliminate Problems Plus Save Time and Material on Jobs

Customer must satisfy all codes and owners' specifications.



PATENT PENDING
PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com


IP27c

Flat Fixed Position 1 Box Support Bracket



Tear drop shaped mounting holes allow fast & perfect installation of boxes without removing box screws.

Flat version allows bracket to be slid left or right over face of studs for adjustment and allows installation with only 1 screw at each end

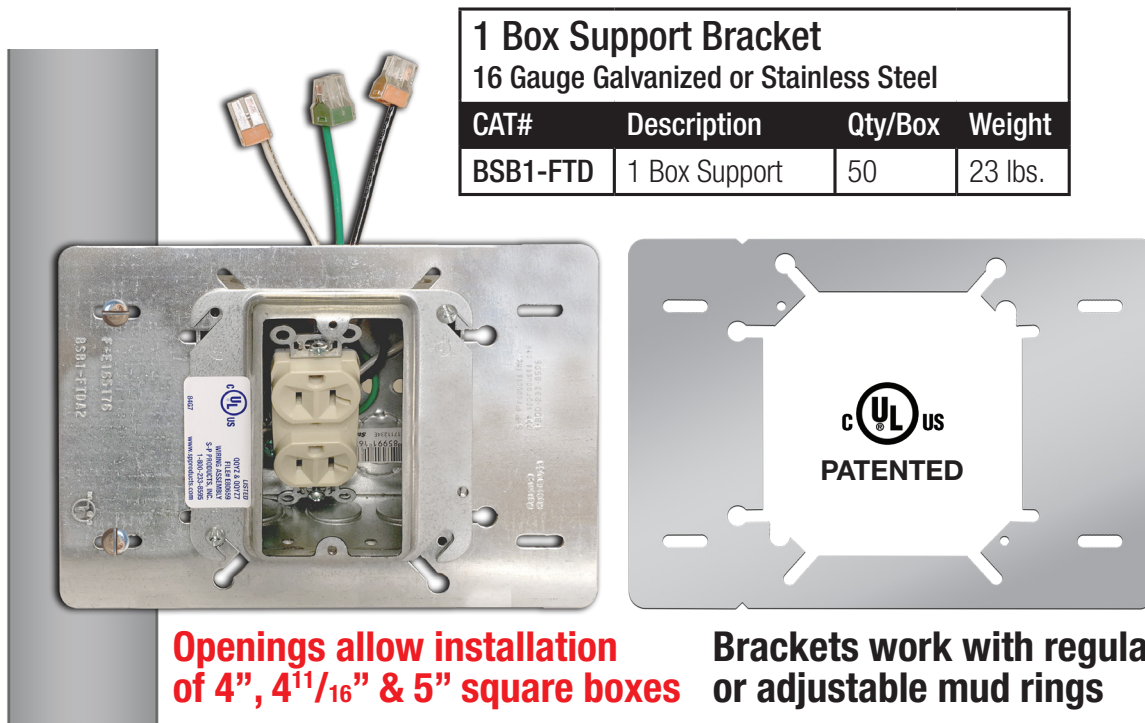

1 Box Support Bracket

16 Gauge Galvanized or Stainless Steel

CAT#	Description	Qty/Box	Weight
BSB1-FTD	1 Box Support	50	23 lbs.

Openings allow installation of 4", 4^{11/16}" & 5" square boxes

Brackets work with regular or adjustable mud rings

MOUNTING INSTRUCTIONS

- Step 1** Align bracket center line to the stud height location required.
Step 2 Apply #8 self tapping screw pan head or Phillips thru slots to secure to stud.
Step 3 Bracket can be loaded with 4", 4^{11/16}" and 5" square boxes and preassembled with boxes and mud rings required prior to installation (on stud) in prefab shop or on site.

SEE WEBSITE
VIDEO **IP28**

Available With or Without Adjustable Mud Rings

Customer must satisfy all codes and owners' specifications.



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP28

Flat Fixed Position 2 Box Support Bracket




Tear drop shaped mounting holes allow fast & perfect installation of boxes without removing box screws.

Flat version allows bracket to be slid left or right over face of studs for adjustment and allows installation with only 1 screw at each end

2 Box Support Bracket

16 Gauge Galvanized or Stainless Steel

CAT#	Description	Qty/Box	Weight
BSB2-FTD	2 Box Support	50	49 lbs.

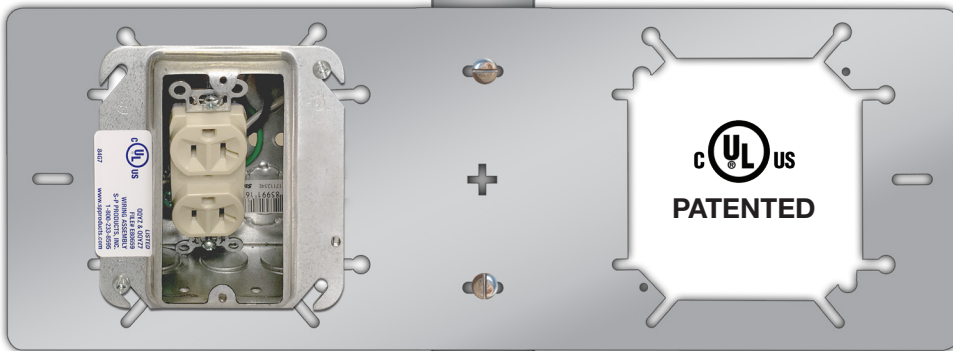

**Mount boxes
on both sides
of stud...**

SEE WEBSITE
VIDEO **IP28a**

**...Or mount
boxes on studs
16" - 8" on center**



**Openings allow installation
of 4", 4^{11/16}" & 5" square boxes**

**Brackets work with regular
or adjustable mud rings**

Customer must satisfy all codes and owners' specifications.



**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com


IP28a

Flat Fixed Position 3 Box Support Bracket




Tear drop shaped mounting holes allow fast & perfect installation of boxes without removing box screws.

Flat version allows bracket to be slid left or right over face of studs for adjustment and allows installation with only 1 screw at each end

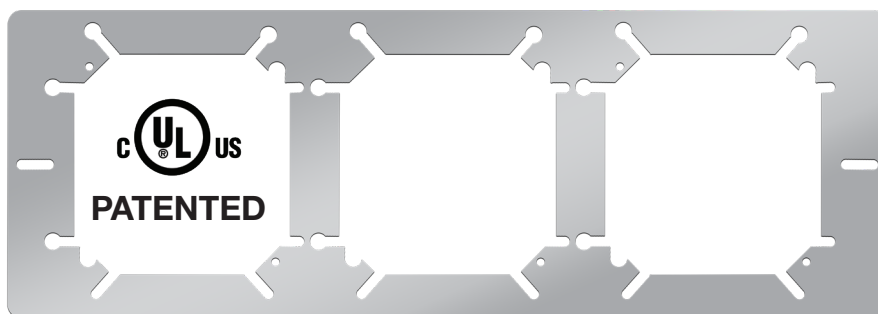

SEE WEBSITE
VIDEO **IP28b**

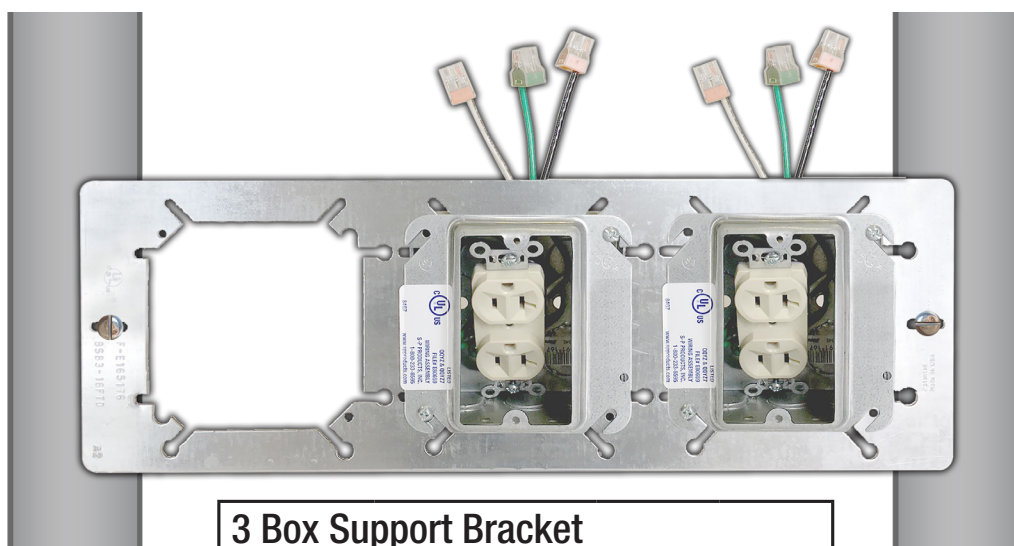

3 Box Support Bracket

16 Gauge Galvanized or Stainless Steel

CAT#	Description	Qty/Box	Weight
BSB3-FTD	3 Box Support 16" Stud Spacing	50	34 lbs.

Openings allow installation of 4", 4^{11/16"} & 5" square boxes

Brackets work with regular or adjustable mud rings

Customer must satisfy all codes and owners' specifications.



**PATENT PENDING
PATENTED**



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com


IP28b

Flat Fixed Position 4 Box Support Bracket



Tear drop shaped mounting holes allow fast & perfect installation of boxes without removing box screws.

Flat version allows bracket to be slid left or right over face of studs for adjustment and allows installation with only 1 screw at each end

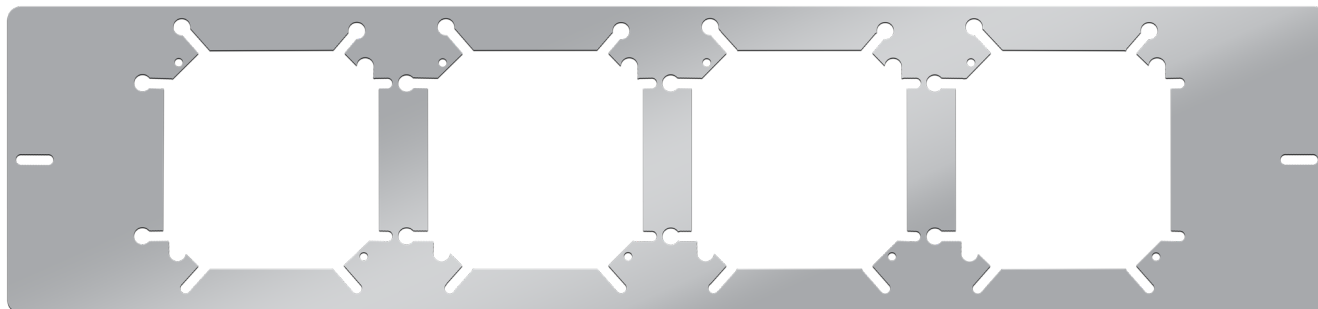


4 Box Support Bracket

16 Gauge Galvanized or Stainless Steel

CAT#	Description	Qty/Box	Weight
BSB4-FTD	4 Box Support 24" Stud Spacing	25	29 lbs.

SEE WEBSITE
VIDEO **IP28c**

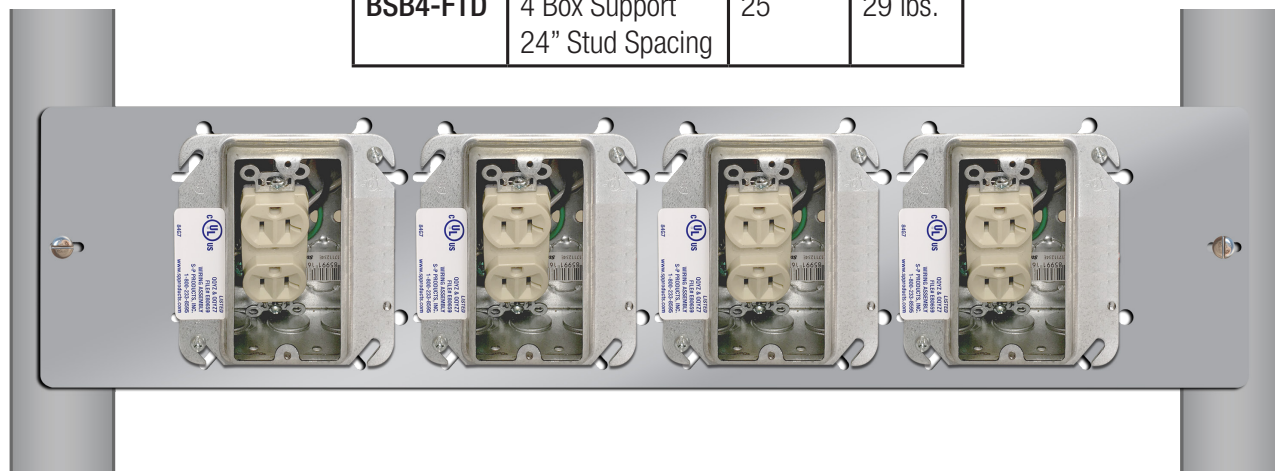

Openings allow installation of 4", 4¹¹/₁₆" & 5" square boxes

Brackets work with regular or adjustable mud rings

Customer must satisfy all codes and owners' specifications.



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP28c



Custom Mounting Plates



Allow fast perfectly located down lights, boxes or other highly repetitive applications above vanities, desks, etc.

Attach to wall, Hard Lid or T Bar ceilings & quickly drop-boxes, fixtures, etc. in later.


Avoid time consuming repetitive measurements for each installation.

Galvanized Steel




Boxes, mounting bolts, etc. welded to plate to prevent unauthorized access in high security areas;

- Prisons
- Hospitals
- Courthouses
- Airports

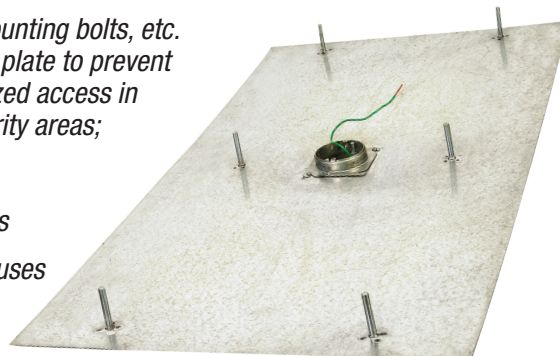

Clear polycarbonate back plates with pre-drilled holes for mounting and installing all types of boxes

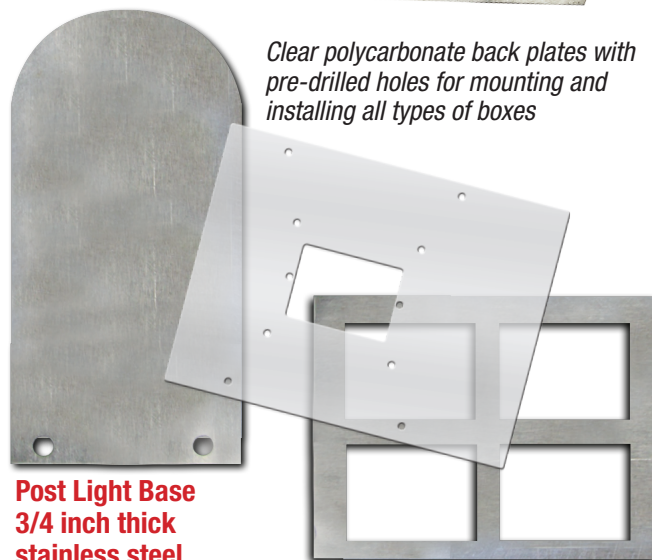

Post Light Base
3/4 inch thick
stainless steel

Ganged Boxes

- Eliminate costly time consuming measuring and possible mistakes
- All plates have rounded corners for safer handling and installation.
- Any configuration & gauge galvanized or stainless steel with any size mounting holes, slots, etc at specified locations Available on special order.

Excellent Quality at Competitive Prices Tell Us What You Need – We'll Make It!

Customer must satisfy all codes and owners' specifications.



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP29

Slicknut



Bushing Adapters for Pulling & Grounding Wire

**Sizes
1/2 thru
4 inch**

IP30a

THREADED GROUND BUSHING

Threaded Ground Bushing

CAT# TGB 50-400 Series



(Standard Qwik Nut includes 1 Lug)
Must install 3 Lugs for UL Listing,
extra lugs sold separately.
Consult Factory for prices and availability

IP30b

THREADLESS GROUND BUSHING

Threaded Ground Bushing

CAT# NTGB 50-400 Series




Rounded edge prevents damage to wire during pulls

Threadless versions for use with heavy wall and thin wall conduit

3 Holes 120° on centers to receive tapped lugs

Threaded Ground Bushing

CAT# NTGB 50-400 Series

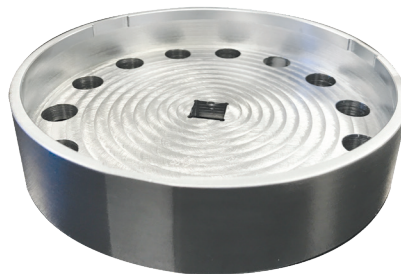

**SLICKNUT
SOCKET TOOL**

NEW

Socket to securely install
Slicknut bushings

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC
Productivity and value thru ideas



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP30

Slicknut



Bushing Adapters for Pulling Wire

IP31a

THREADED PULL BUSHING

Threaded Ground Bushing

CAT# TPB 50-400 Series



**Sizes
1/2 thru
4 inch**



(Standard Qwik Nut includes 1 Lug)
Must install 3 Lugs for UL Listing,
extra lugs sold separately.
Consult Factory for prices and availability

IP31b

THREADLESS PULL BUSHING

Threaded Ground Bushing

CAT# NTPB 50-400 Series



Rounded edge prevents damage to wire during pulls
Saves time when pulling branch & feeder wire
Serrated edge on under side of bushing serve as locknut
Split plastic bushing also serves as locknut
Install one with every connector

Threaded Ground Bushing

CAT# NTGB 50-400 Series



**SLICKNUT
SOCKET TOOL**

NEW

Socket to securely install
Slicknut bushings

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC
Productivity and value thru ideas



**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP31



EZ Hangers in T Bar Ceilings

For Down Lites, Speakers, Exit Signs, etc.





Save over
20 MINUTES
per installation with a
PERFECT ALIGNMENT
EVERY TIME!




E180245

CAT#	BOX SUPPORT BRACKET
2B1	2 Foot (24" on Center) T Bar Sold in Pairs
4B1	4 Foot (48" on Center) T Bar Sold in Pairs


- **Extremely strong 22 gauge galvanized steel with a 50 lb load rating.**
- No extra parts to drop or lose.
- 2 mounting holes each 1-½ inch from center mark to quickly mount speakers or other devices in center of tile plus one at each end for supporting to structure independently of T Bar per IFFX Luminaire Fittings Standard.

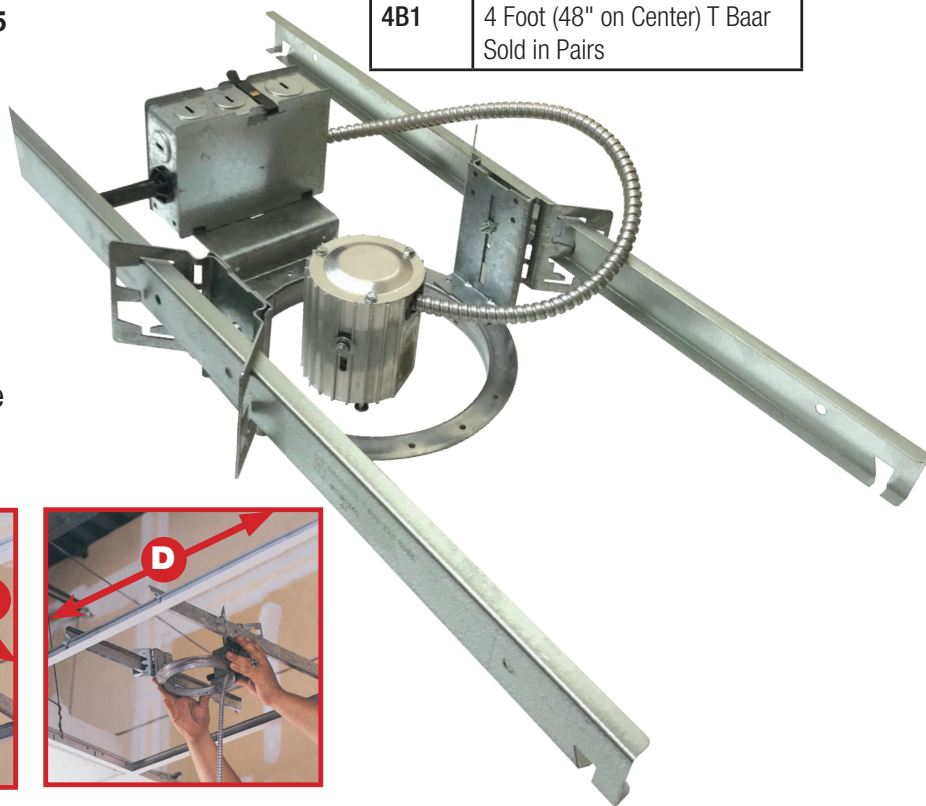

A Bend out tabs on ends of hangers



C Slide hangers with box or fixture housing attached along T Bar



D Slide fixture housing, boxes, etc. in other direction along hangers to location required

B Bend tabs in to lock in place

Eliminate Labor Intensive Cutting & Tying Down Lathers Channel, Black Iron, Conduit, etc.

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC
Productivity and value thru ideas



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE




730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP32

Plain Mounting Brackets for T Bar Ceilings



**For Down Lites, Speakers,
Exit Signs, boxes etc.**

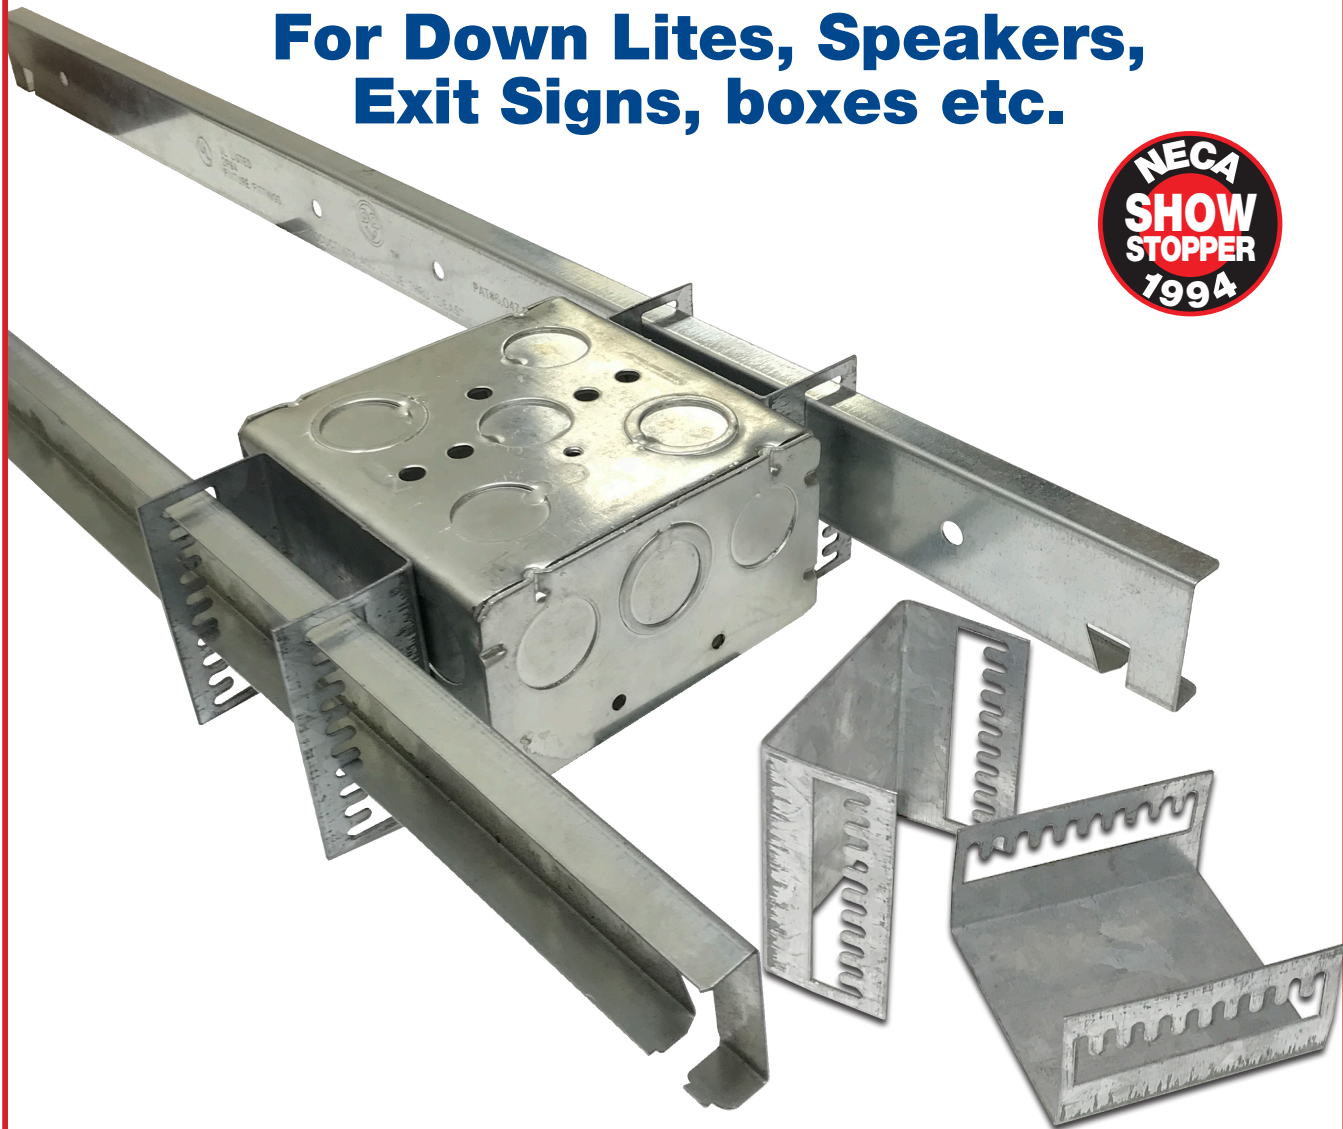

Attach PB1 brackets to box insert
2B1 or 4B1 hangers for mounting at
various elevations in T Bar Ceilings.

CAT#	BOX SUPPORT BRACKET
------	---------------------

PB1	Mounting Brackets
-----	-------------------

22 gauge galvanized or stainless steel

Customer must satisfy all codes and owners' specifications.



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP33

Vertical, Ceiling Adjustable Bar Hanger Assembly



Save over
40 MINUTES
per installation with a
PERFECT ALIGNMENT
EVERY TIME!



22 gauge galvanized
or stainless steel

Perfect for Prefab!

**Provides a strong support &
flexibility for critical height
adjustments in T Bar Ceilings**

**Meets 50lb Load
Rating Requirement**



Customer must satisfy all codes and owners' specifications.



**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP34

Custom Engraved Nameplates & Labels For Electrical and Mechanical Identification



- *Extensive experience labeling complex redundant base building systems in data centers (tenant labels for PDUs, FDCs, RPPs, cabinet rows, server racks, power strips) and hospitals.*
- *Laser engraved stainless steel, aluminum and plastic signs with vinyl lettering also available.*

Customer must satisfy all codes and owners' specifications.



PATENT PENDING
PATENTED



LABELS APPLY TO PRODUCTS **ONLY WHERE SHOWN ABOVE**

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP35



Roof Top Blox

Roof Conduit Support

Safer, Lighter and Faster!

Also
Available with
Various Lengths of
Galvanized Steel
Strut Attached


EXTREMELY COMPETITIVE PRICING

Eliminates cutting and hauling, expensive treated lumber or heavy rubberized supports up to roof.

- Recycled black plastic. Can qualify for LEED Credits.
- Quickly secure conduit with an inexpensive one hole strap.
- Block floats free on roof. Allows movement to prevent damage to roof membrane when conduit expands and contracts due to temperature changes.
- Single Point load rating 250 lbs. or Dual Point/Strut Mounted 350 lb. load rating.
- Perfect for gas piping, plumbing, HVAC, conduit, cable tray & mechanical equipment.

Single Point
250 lb.
Load Rating

Also
Available with
Various Lengths of
Any Type Strut
Attached

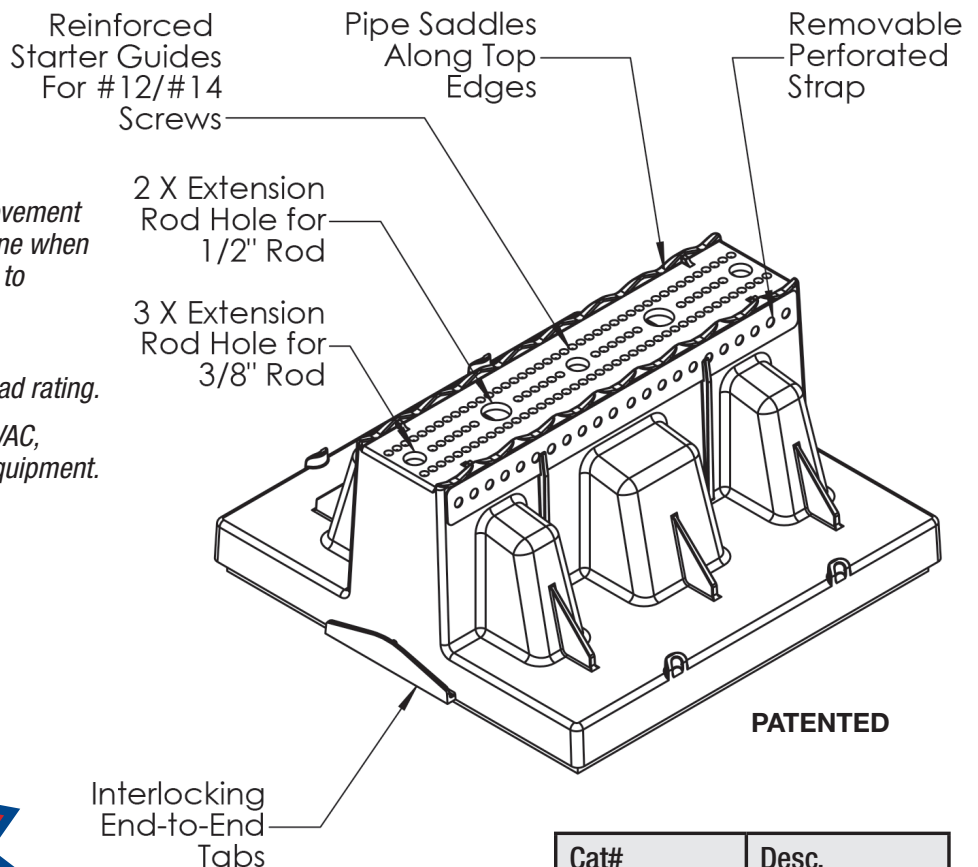

Cat#	Desc.
RTB-2000	Roof Top Blox

For Electrical, Plumbing, HVAC, etc.

SP PRODUCTS, INC
Productivity and value thru ideas



PATENT PENDING
PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

IP36

Prefab Assemblies for Data Power Distribution Units



Any Manufacturers' brand, type and configuration of UL Listed components

Cables Satisfy National Electrical Code Article 645.5(E) and do not have to be securely fastened in place and supported every 4.5 feet as stated in article 350.30(A).

Every assembly is carefully and thoroughly tested per customers' requirements for ground integrity, insulation leaks, proper phase rotation and all conductors are Hi-Pots tested at twice rated circuit voltage plus 1,000 volts.

Certificate of calibration provided with each order.

Assemblies are marked at each end with custom labels protected by clear heat shrink tubing to prevent alteration or accidental removing.

Liquidtight conduit colors available in: black, gray, blue, red, yellow, green, orange, brown, and white up thru 225 ft.

Specify all components and if certain manufacturers' brands are required

Single or multiple circuits provided.

Consult factory for prices and availability.



Customer must satisfy all codes and owners' specifications.



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

PFA1

Prefab Assemblies





Let SP be Your Prefab Shop with **NO INVESTMENT**
on Every Day Jobs Throughout the Year



**PLUS...Compete Aggressively and
Win Larger Jobs with More Profit**



BSB1-FTD
(See page IP28)

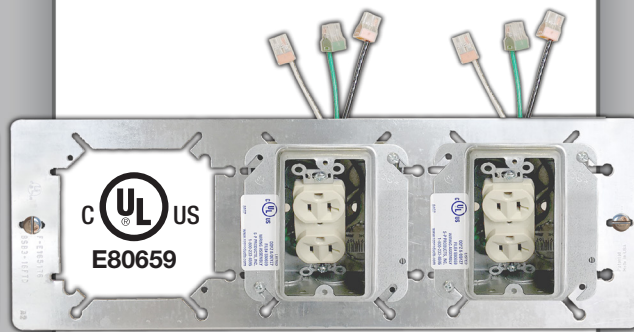

BSB3-FTD (See page IP28b)

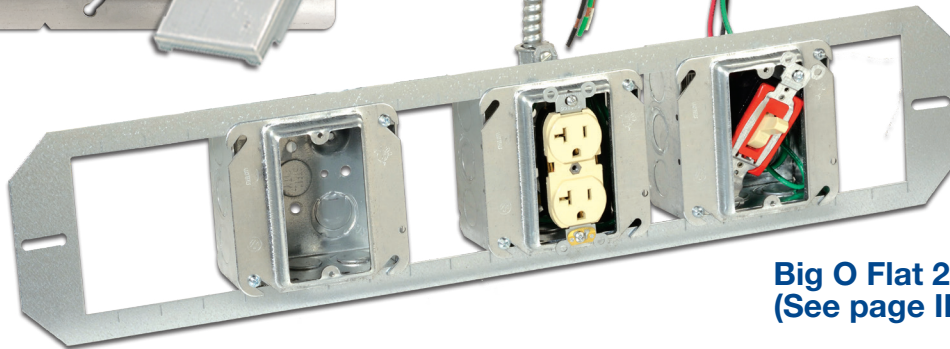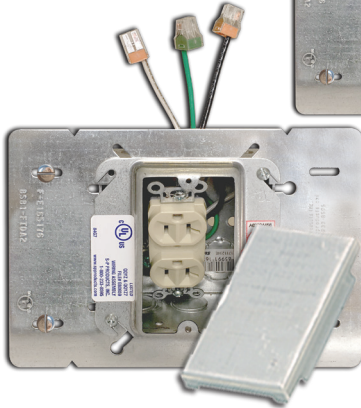

Big O Flat 24F
(See page IP26)

- If components are not specified, manufacturers equals of our choice will be supplied
- Quantity discounts and **LABOR ONLY ORDERS** (customer supplies all material other than SP proprietary items) available for greater savings

PLUS An Unlimited Variety of Other Applications



Assemblies available
with 1 or 2 gang Strong
Steel Snap On/Off
Protective Covers



PATENTED
E185948

Protective Covers
also sold separately
(see pg TE-1)

All units carefully inspected, marked and packed to guarantee
quality plus minimize handling in the shop or field.

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC
Productivity and value thru ideas



**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com


PFA2

Prefab Assemblies



**Let SP be Your Prefab Shop with NO INVESTMENT
on Every Day Jobs Throughout the Year**

**PLUS...Compete Aggressively and
Win Larger Jobs with More Profit**

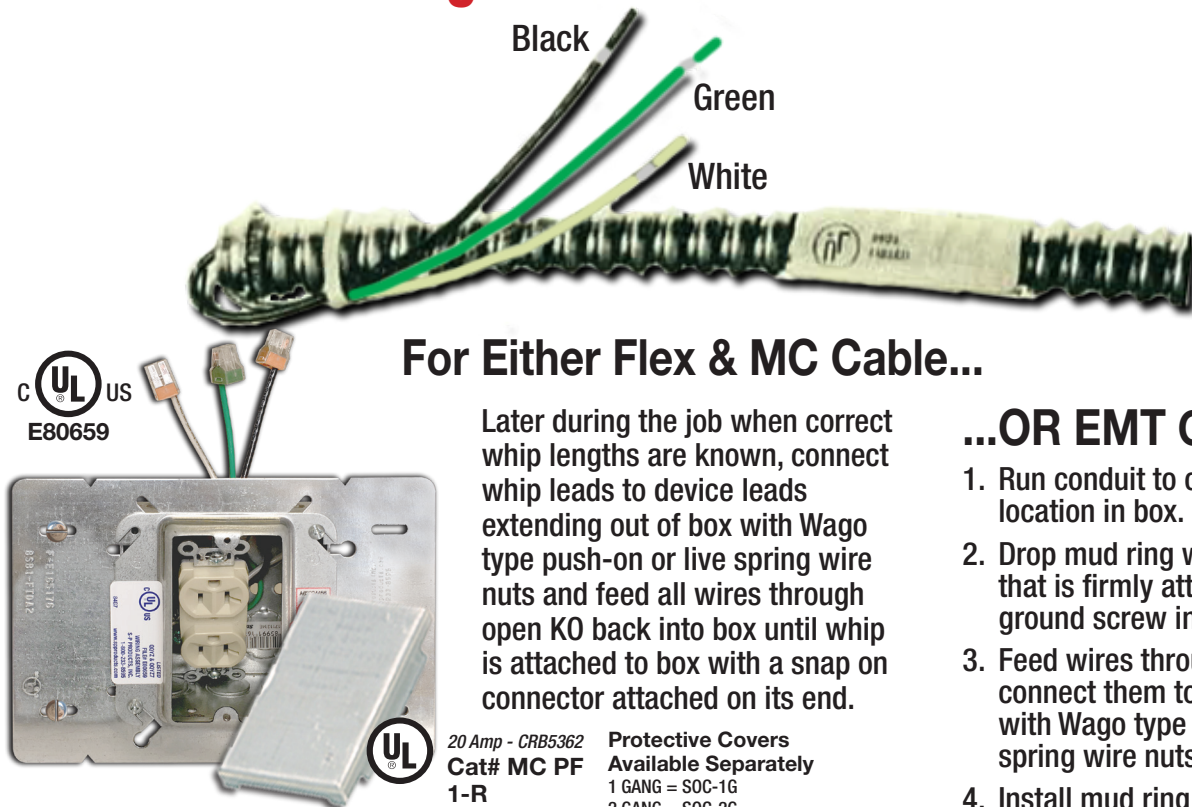

For Either Flex & MC Cable...

Later during the job when correct whip lengths are known, connect whip leads to device leads extending out of box with Wago type push-on or live spring wire nuts and feed all wires through open KO back into box until whip is attached to box with a snap on connector attached on its end.

20 Amp - CRB5362
Cat# MC PF
1-R

Protective Covers
Available Separately
1 GANG = SOC-1G
2 GANG = SOC-2G
(see pg TE-1)

...OR EMT Conduit

1. Run conduit to correct KO location in box.
2. Drop mud ring with device that is firmly attached to green ground screw in box.
3. Feed wires through conduit and connect them to device leads with Wago type push-on or live spring wire nuts.
4. Install mud ring with device back onto box.

Above assembly includes the following components

- 1- 4 square 1/2" - 3/4" KO x 2 1/8 deep box
- 1- 1 gang x 5/8" raised mud ring
- 1- 20 A specification grade CRB5362 back & side wired device tucked in or attached to mud ring
- 1- Single box support 16 gauge BSB1-FTD (IP28)

- 1- #12 stranded 8 inch pigtail grounded to box
- 3- #12 THNN stranded 8" long any color wire leads each with Wago push on quick connector or live spring wire nuts attached.
- 1- One or two gang protective cover (shown above) attached to mud ring.

Also Available without wiring devices and with any Type, Combination and Manufacturers Brand Components. If not Specified SP will Supply Equals.

Labor only orders also negotiated

Customer must satisfy all codes and owners' specifications.



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

PFA3

Adjustable Depth Mud Rings for 4 Square Outlet Boxes




Meets UL514
& CSA C22.2 No. 18.1

**Prevent Costly
Depth Problems
SAVE a Great Amount
of Time**


1 Gang

Cat# 1GADJMR-58-125

Cat# 1GADJMR-75-150

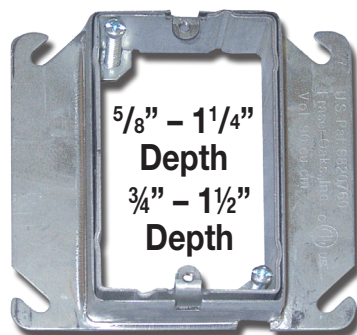


Cat# 2GADJMR - 2 Gang




Adjusting screws NOT covered by drywall.

Eliminates lost time and damage to drywall when chipping out to expose adjusting screws.

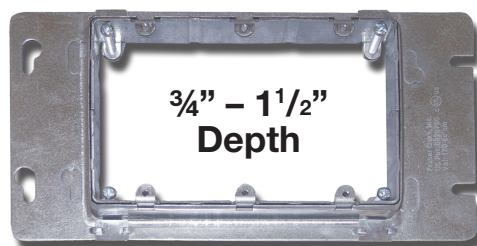

Cat# 3GADJMR - 3 Gang

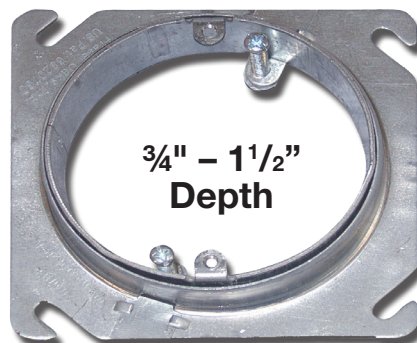

Cat# RADJMR - Round

**Provides complete flexibility to quickly
allow perfect alignment of devices**

Customer must satisfy all codes and owners' specifications.



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com


PFA4

Grounding Pigtails

All Colors and Versions Available



Set Screw #12 THHN x 8"



Solid Cat# 12SOL-8-SC
Stranded Cat# 12STR-8-SC

One End Stripped #12 THHN x 8"



Solid Cat# 12SOL-8-1ES
Stranded Cat# 12STR-8-1ES

Ring #12 THHN x 8"



Stranded Cat# 12STR-8-RT

Both Ends Stripped #12 THHN x 8"



Solid Cat# 12SOL-8-2ES
Stranded Cat# 12STR-8-2ES




Fork/Spade #12 THHN x 8"



Stranded Cat# 12STR-8-FT

Ring End/Push On #12 THHN x 8"



Stranded Cat# 12STR-8-WA-RT


Custom Wire Leads



**Green Ground
Set Screw**



Push On Type
UL Listed for 600 volt - 20 amp



Ring Terminal



**Spade or Fork
Terminal**

(insulated or uninsulated)



An unlimited variety of configurations with or without any type of above connectors, terminals, etc. attached at one or both ends, and in any type insulation, size, length, color, plain, or striped etc., solid or stranded wire are available. Consult Factory.

**Excellent quality with fast delivery
at extremely competitive prices**

Customer must satisfy all codes and owners' specifications.



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

PFA5




Snap On/Off

Adjustable and Reusable Protective Covers

SAVE

a great amount of time and money on all outlets for jobs throughout the year!

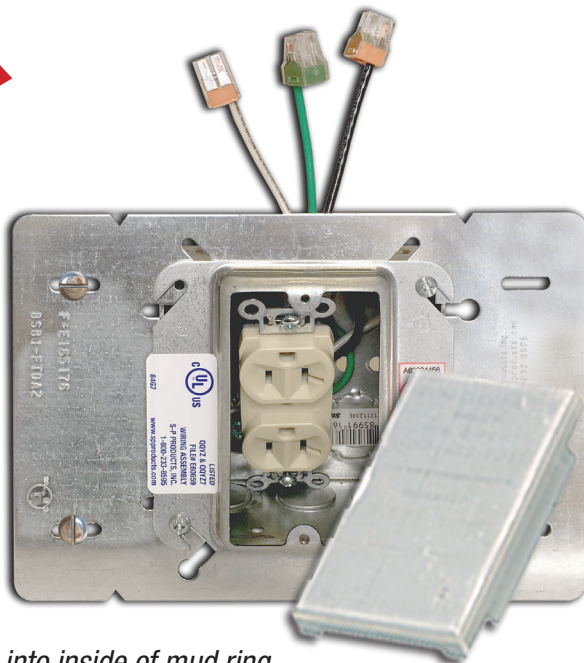

Description	Catalog #
1-Gang	SOC-1G
2-Gang	SOC-2G
3-Gang	SOC-3G



- Steel flanges are inserted into inside of mud ring to allow routers to cut a smaller opening.
- Covers suitable for all manufacturers' brands including adjustable mud rings.
- Device cover is used for protection of wiring devices prior to energizing circuit.



1-Gang = SOC-1G
PATENTED

2-Gang = SOC-2G
PATENTED



3-Gang = SOC-3G
PATENTED

Also suitable when wire devices are connected to leads and tucked into back of deep boxes

Customer must satisfy all codes and owners' specifications.



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

TE1



Rigid Pipe Joiner

Spins 10 Foot Lengths Together in Under 10 Seconds with Less Chance of Injury

Catalog #	Size
-----------	------

PS125	1¼"
-------	-----

PS150	1½"
-------	-----

PS200	2"
-------	----

PS250	2½"
-------	-----


PS300	3"
-------	----

PS350	3½"
-------	-----

PS400	4"
-------	----

PS500	5"
-------	----

PS600	6"
-------	----

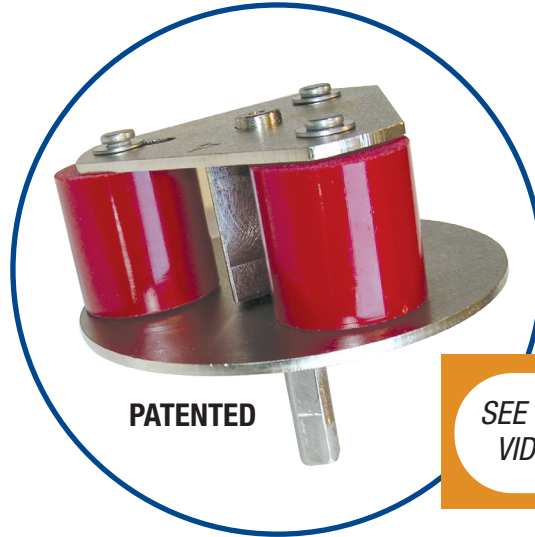


PATENTED

SEE WEBSITE
VIDEO **TE2**

NO POWER SOURCE NEEDED

SUITABLE FOR USE IWHT
MILWAUKEE 0721-21 V28
VOLT RIGHT ANGLE
CORDLESS DRILL

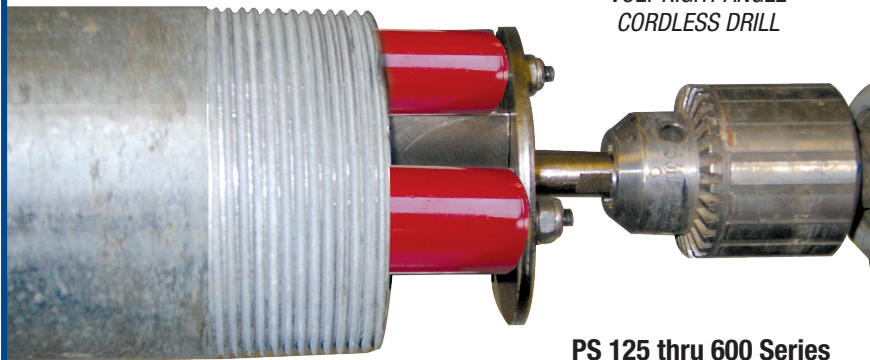

PS 125 thru 600 Series

- When shaft turns, grips expand to lock on inside of conduit and spin it 360° to join the entire 10 foot length into the preceding coupling. Drill can be reversed to disconnect conduit.
- Eliminates labor intensive ropes or chain and heavy hard to handle strap wrenches.
- Spinners available in sets at reduced prices or sold separately.

WHEN USING CUTTING OIL,
REMOVE WITH A PROPER SOLUTION.
DO NOT INSERT ANY FOREIGN
MATERIALS IN AN ATTEMPT TO
PREVENT SLIPPAGE.

Prevents Damage to Inside and Outside of Conduit – Especially PVC Coated

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC.
Productivity and value thru ideas



PATENT PENDING
PATENTED


LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE




730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

TE2

Poly Foam Box Insert

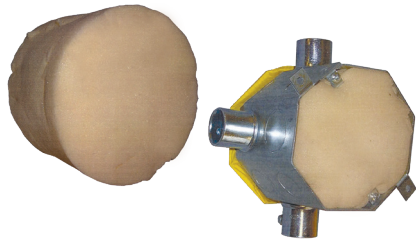


Cat# PBI-0 = Octagonal

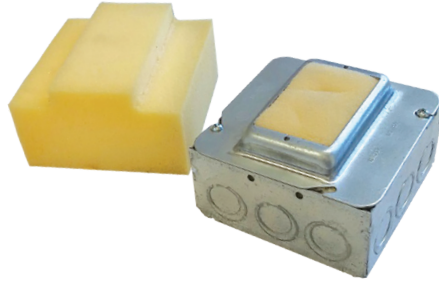


Cat# PBI-4/S-1G = 1 Gang (4")
Cat# PBI-5/S-1G = 1 Gang (4¹¹/₁₆")



Cat# PBI-4/S-2XR = 4¹/₄"
2-Extension Ring

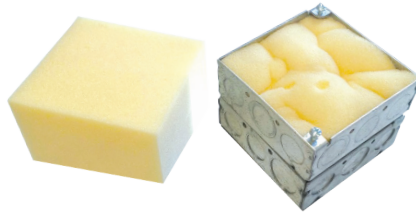

Cat# PBI-4/S-1XR = 3³/₄"
1-Extension Ring

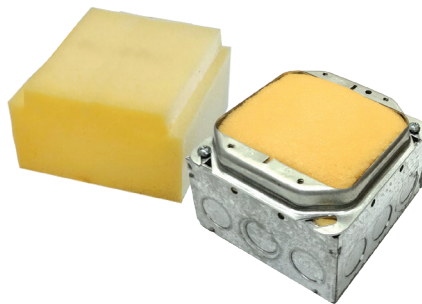


Cat# PBI-4/S-2G = 2 Gang (4")
Cat# PBI-5/S-2G = 2 Gang (4¹¹/₁₆")



Cat# PBI-4/S-3XR = 7"
3-Extension Rings

- Prevents Concrete from Entering Boxes
- Fast and Easy to Install
- Reusable for 8 or more applications

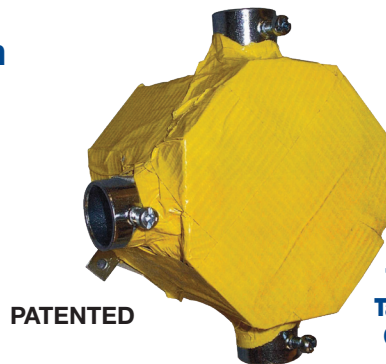

PATENTED

- Saves Over 5 Minutes, Plus Cost of Tape
- For All Types of Boxes on Poured in Place Concrete Jobs

Traditional Method of Taping Box to Keep Out Concrete During Pour

Available in a Wide Variety of Other Configurations
Consult Factory for more Information

Customer must satisfy all codes and owners' specifications.



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

TE4




PATENT PENDING

Cut'N'Catch

NEW!

**Only 1 worker needed to cut any type
conduit, strut, threaded rod up thru 6" size**

Cut'N'Catch kit contains 7 pieces (circled in blue) designed to
work with stand and rebar (not included) as pictured.

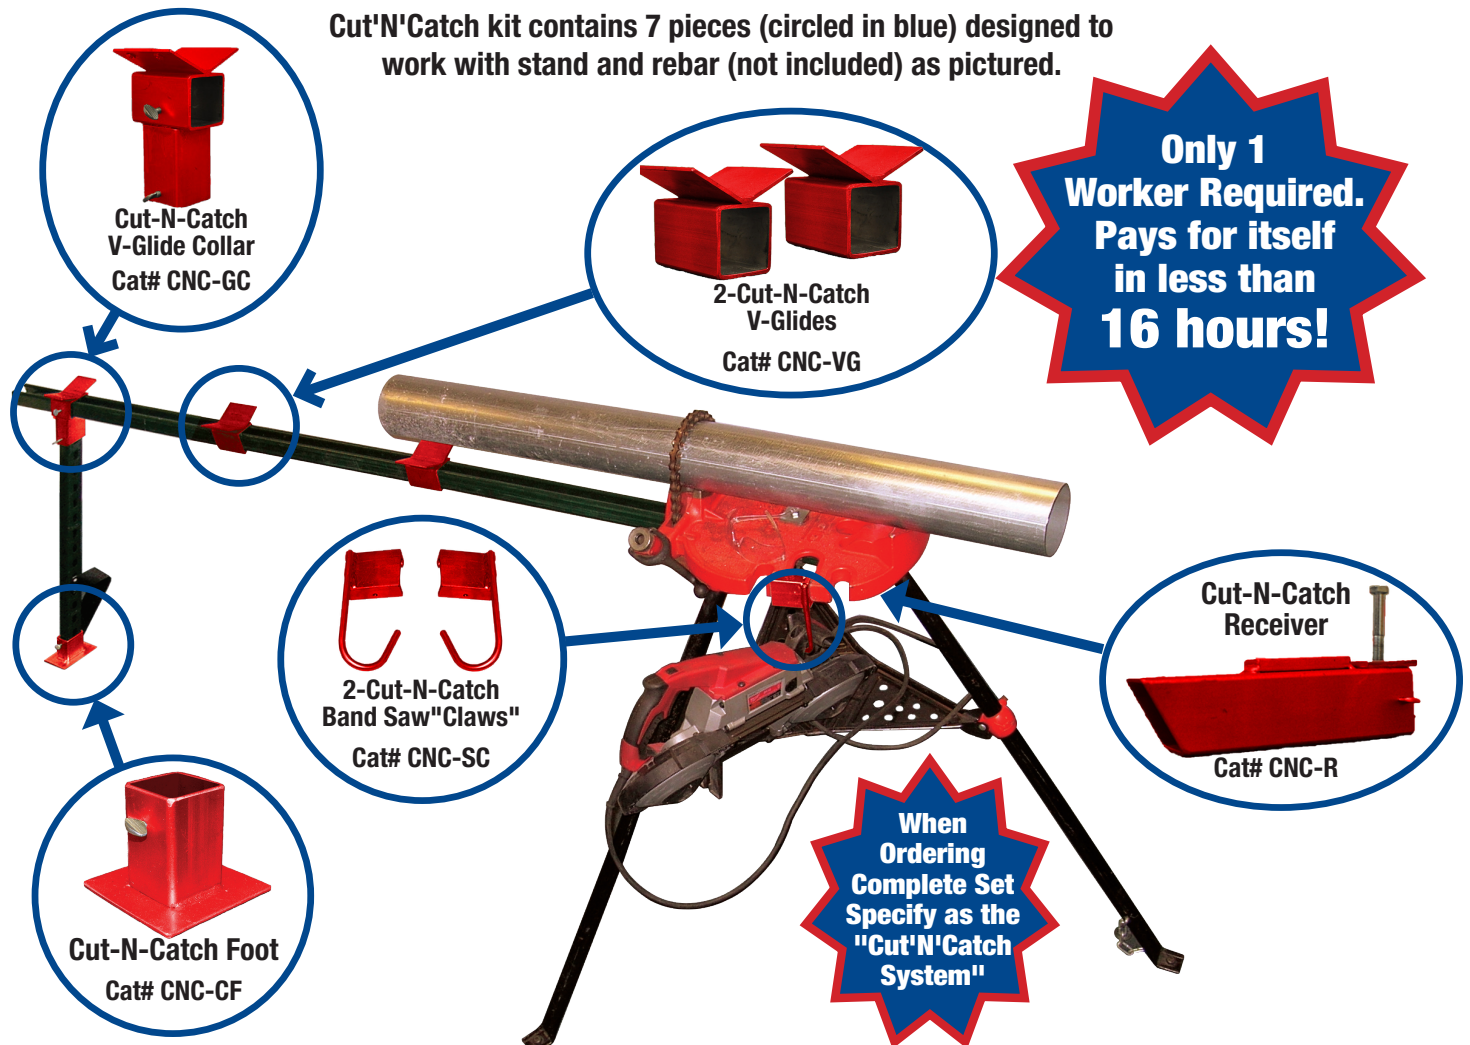

- Portable, use anytime, anywhere on job sites & prefab shops
- Ideal for all trades; Electricians, Plumbers, HVAC, Carpenters, etc.
- Accommodates any length of conduit, strut, threaded rod, etc.
- "Claws" secure bandsaw and protect from expensive damage by falling
- Allows for a cleaner cut and eliminates burrs - NO FILING required
- Securely clamps any length material safely in place for cutting
- Catches cutoff in V-Glides to keep pieces off the ground

**Eliminates the dangerous "Captain Morgan" method!
BOTH hands remain free to operate bandsaw.**

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC
Productivity and value thru ideas



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE




730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

TE5

SCH 40 & 80

PVC Reaming Bits for Transition Couplings

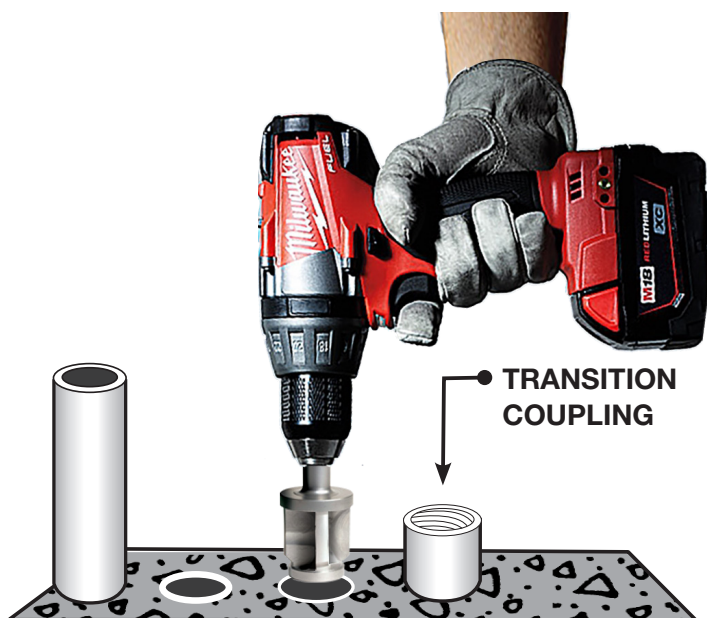

TRANSITION
COUPLING



1-Piece

Larger sizes available
on special order

PATENT
PENDING

High Quality Steel
Sharpenable for
Long Life

PVC Conduit Size	SCH 40 PVC Catalog #	PVC Conduit Size	SCH 40 PVC Catalog #
1/2"	IPRB50-SCH 40	2 1/2"	IPRB250-SCH 40
3/4"	IPRB75-SCH 40	3"	IPRB300-SCH 40
1"	IPRB100-SCH 40	3 1/2"	IPRB350-SCH 40
1 1/4"	IPRB125-SCH 40	4"	IPRB400-SCH 40
1 1/2"	IPRB150-SCH 40	5"	IPRB500-SCH 40
2"	IPRB200-SCH 40	6"	IPRB600-SCH 40

1/2" & 4" = 1/2" Chuck

PVC Conduit Size	SCH 80 PVC Catalog #	PVC Conduit Size	SCH 80 PVC Catalog #
1/2"	IPRB50-SCH 80	2 1/2"	IPRB250-SCH 80
3/4"	IPRB75-SCH 80	3"	IPRB300-SCH 80
1"	IPRB100-SCH 80	3 1/2"	IPRB350-SCH 80
1 1/4"	IPRB125-SCH 80	4"	IPRB400-SCH 80
1 1/2"	IPRB150-SCH 80	5"	IPRB500-SCH 80
2"	IPRB200-SCH 80	6"	IPRB600-SCH 80

5" & 6" = 3/4" Chuck

NO PARTS TO LOSE ON THE JOB SITE!

Customer must satisfy all codes and owners' specifications.



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE




730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

TE6


Live Panel Lockout Brackets



Extremely Safe – Save Time Everyday

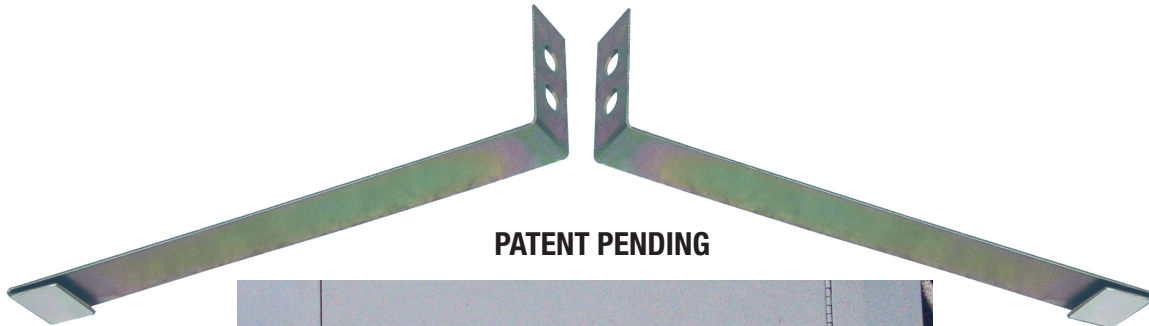

**Locks & keys
for brackets
sold separately.
Consult Factory
for additional
cost.**

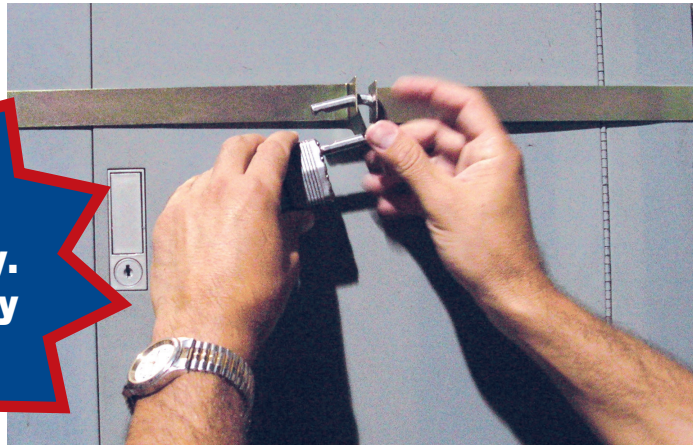

- **On/Off in seconds**
- *Lock it to Eliminate entry by unauthorized personnel*
- *Brackets sold in pairs*
- *Locks and keys sold separately*
- *Two holes provided on each piece for two locks*
- *Strong 18 gauge zinc plated steel, reusable with long life*

Common Sizes

LOB 20" wide panel

LOB 36" wide panel

LOB 40" wide panel

**An unlimited variety
of other panel widths
available.**

**FOR USE AS AN ACCESS DETERRENT –
NOT FOR PROTECTION AGAINST ELECTRICAL SHOCK!**

Customer must satisfy all codes and owners' specifications.



**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

TE7



Live Panel Temporary Covers



**Provide Protection for Construction
Workers, Visitors, and Tenants**



**Extremely
Safe 600 Volt
Rated**



20" X 48" Cat# TPC 20 X 48
14" X 48" Cat# TPC 14 X 48

Other sizes available on
special order

**ON/OFF in Seconds Highly Visible –
Improves Image on Jobsite**

**Non-Conductive Magnets Securely
Fastens Cover to Panel**

*Panels available with pre-drilled holes for nuts, bolts and washers to securely attach panel.
Customer must specify size and exact locations required. Covers also available with nuts,
bolt and washers installed.*

ANSI Z535.1, ANSI Z535.2, ANSI Z535.3, ANSI Z535.4, ANSI Z535.5, ANSI Z535.6

**For Use as an Access Deterrent –
Not For Protection Against Electrical Shock!**

Customer must satisfy all codes and owners' specifications.



**PATENT PENDING
PATENTED**

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

TE8



Portable Cable Pullers for Power, Data, etc. in Light Poles

Small Puller (pair shown)


Cat# PWP 100-S
2.7 lbs Each

NEW!

**USE
IN SETS
OF TWO**

Extra-Small Puller (not shown)

Cat# PWP 100-ES
2.3 lbs Each

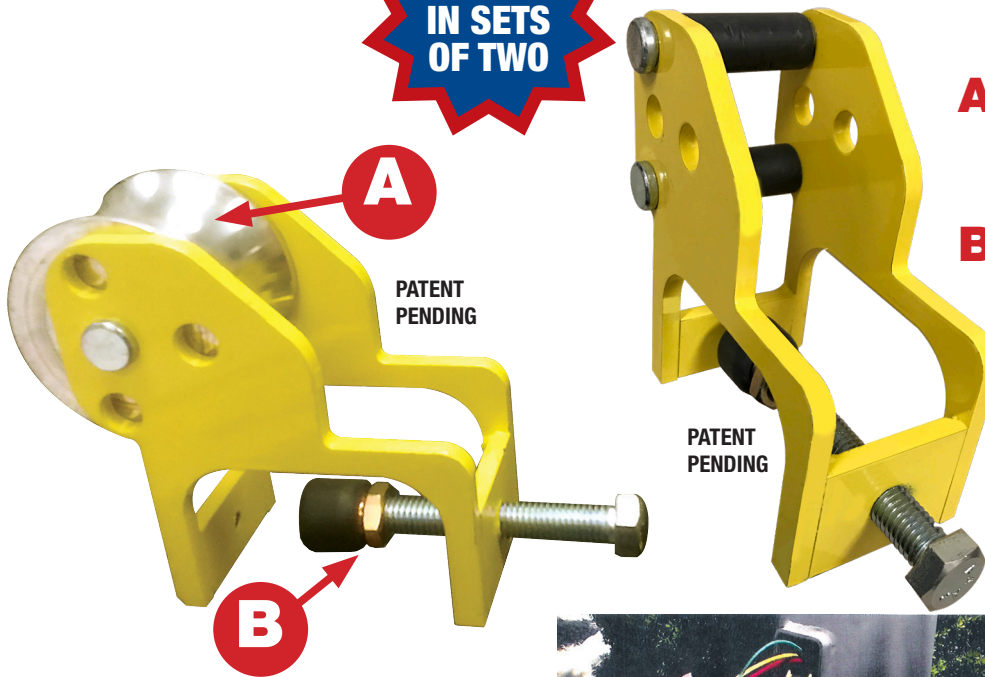

A Extremely durable grooved bearing grade wheel receives and controls cables during the pull

B Heavy duty bolt secures cable puller to pole hand hole and strong plastic cap protects pole from damage when attached

- Quickly Attach to Hand Hole of Each and Pull Wire All While Standing Ground to Reduce Chance of Injury
- Use in Sets of Two
- Eliminate Damage to Poles and Wire
- Extremely Safer and Faster



**2 Electricians Walked from Pole to Pole and Pulled Over
52,000 Feet of #4 Cable in One Day or Only 16 Total Hours!**

Customer must satisfy all codes and owners' specifications.

SP PRODUCTS, INC
Productivity and value thru ideas



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

TE9


Anchor Bolt Templates




Extremely Fast, Accurate Installation For Light Poles, Beams, etc.

**Each Template
Saves 100's of
Dollars!**

**Extremely Fast,
Accurate Installation
For Light Poles,
Beams, etc.**

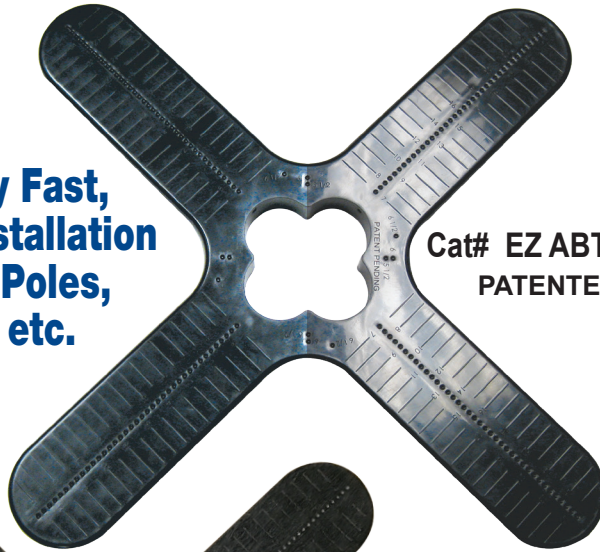

Cat# EZ ABT-800
PATENTED

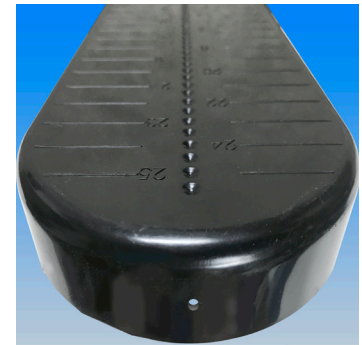

Cat# EZ ABT-2.3
PATENTED

**Improved Version
for Light Rail Jobs
Requiring Two
3" Conduits**

*A 1/4" hole can be provided on
end of each wing upon request
for fast and secure installation
of the template to sonotube
before the concrete pour*

- Rulers on all 4 wings allow drilling same bolt diameter holes for 5½ thru 25 inch four bolt circle patterns.
- Embedded divots ensure accuracy when drilling.
- Color code templates for each bolt diameter and drill different circle patterns from job to job.
- Deep recess in back allows leveling nut to be free of concrete.
- Strong extremely long-lasting non-corrosive ABS plastic.

Eliminate constantly purchasing and fabricating expensive plywood.

Customer must satisfy all codes and owners' specifications.



PATENT PENDING
PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

TE10-11

PVC Conduit Bender



Portable – No Power Needed!

Use Anytime – Anywhere – On Job Site Eliminates expensive Hot Boxes, Heat Blankets, Generators, etc. Up Thru 6 Inch Schedule 40 & 80



Complete With:
Bender, Wire Heat Guard,
25 ft. Hose, Brass Regulator
All in strong steel carrying

NOTE: Customer supplies
5 gallon propane tank

ONE FREE Bender Supplied for every \$100,000 of Qwik Duct Templates, End Bells and/or Transition Couplings ordered. Orders can be assorted and accumulated for a maximum period of 12 months from date of first order. If Bender's are not available and customer achieves above goal he will receive a 2% credit on Template, End Bell and/or Transition Couplings purchases during the period. Customer must accept this offer with a dated signed agreement.

Customer must satisfy all codes and owners' specifications.



PATENT PENDING
PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com


TE12

Dry Wall Cut Out Templates




**Allow Fast, Perfectly Spaced and Level Cut Outs
with NO DAMAGE to Drywall**

Cat# COT100
PATENTED

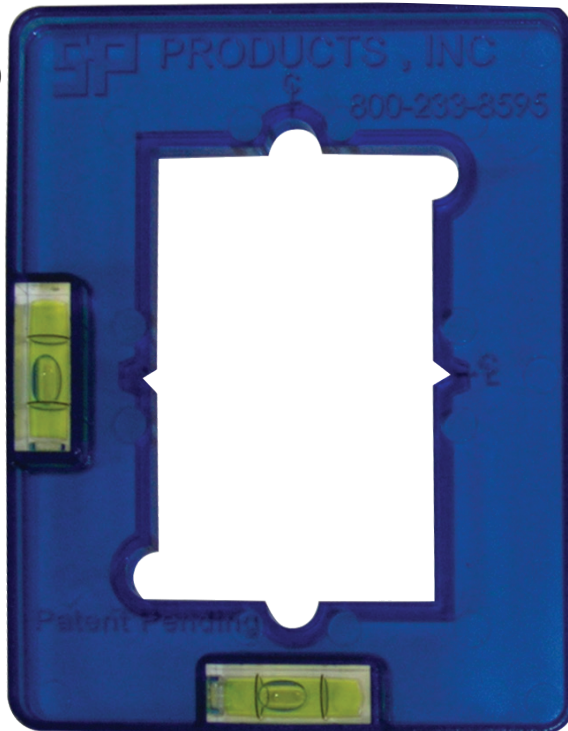

- Two levels provided for perfect horizontal and vertical alignment
- Center lines provided for accuracy – especially when ganging cut outs
- Clear see thru blue polycarbonate material

Allows tracing all box
and screw openings.

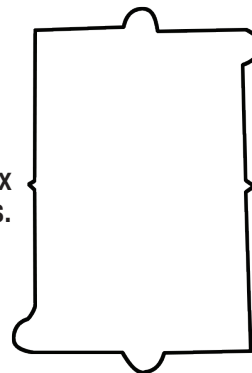

**Extremely Strong and Durable,
Save Hundreds of Dollars Every Year**

Customer must satisfy all codes and owners' specifications.



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

TE13



PVC Driver for Joining SCH 40/80 PVC Conduit



Assemble PVC conduits in a Duct Bank on a job site or prefab using the PVC Driver with a Hammer Drill to join 2 pieces of PVC conduit in a matter of seconds.

PVC Driver eliminates extra tools and allows for a clean and safe installation with less labor.

Insert PVC Driver into Hammer Drill and drive PVC Conduit into place with this light weight aluminum tool for

SAFER, BETTER, FASTER jobs.

See Our
CHUCK ADAPTERS
from 3/4" to 1/2"



See page IP15

1-Piece Aluminum Construction

5", 6" & 8" = 3/4" Chuck
1" thru 4" = 1/2" Chuck



Catalog #	SCH 40/80 PVC Conduit Size
PVCD-100-125-150	1", 1-1/4" & 1-1/2"
PVCD-200-250-300	2", 2-1/2" & 3"
PVCD-350-400	3-1/2" & 4"
PVCD-500	5"
PVCD-600	6"
PVCD-800	8"

SP PRODUCTS, INC
Productivity and value thru ideas



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

TE14

EMT Conduit Layout Tool

NEW

for perfectly spacing panel knock-outs

This NEW EMT Conduit Knock-Out System makes layout simple and fast with consistent professional looking results every time!

Available in sizes 1/2" up to 4" EMT
OR 2" and above for RGD.

For both 7/8" and 1-5/8" strut heights.

PATENTED

SEE WEBSITE
VIDEO **TE15**



**Step 1:
Measure**




**Step 2:
Mark**



**Step 3:
Drill**



**Step 4:
Install**

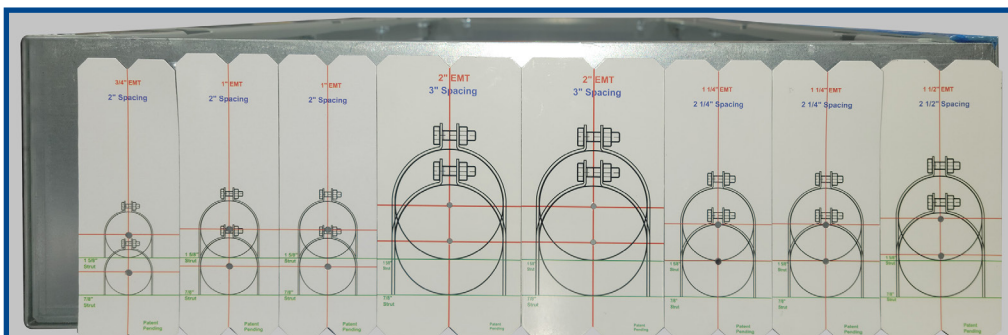

The pre-measured magnetic templates hold their position, enabling easy layout of all conduits, on J-Boxes, Panels or Cabinets.

Catalog #	EMT Size	RGD Size	Desc.
CLT-50	1/2"	1/2"	4 Pcs.
CLT-75	3/4"	3/4"	4 Pcs.
CLT-100	1"	1"	4 Pcs.
CLT-125	1-1/4"	1-1/4"	4 Pcs.
CLT-150	1-1/2"	1-1/2"	4 Pcs.
CLT-200	2"	2"	2 Pcs.
CLT-250	2-1/2"	2-1/2"	2 Pcs.
CLT-300	3"	3"	2 Pcs.
CLT-350	3-1/2"	3-1/2"	2 Pcs.
CLT-400	4"	4"	2 Pcs.

SP PRODUCTS, INC
Productivity and value thru ideas



PATENT PENDING
PATENTED

LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE



730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

TE15



Terms & Conditions

**ALL PRICES ARE SUBJECT TO
CHANGE WITHOUT NOTICE**

1. Cash Discount 2% 10 Days, Net 30. F.O.B. Factory, Elk Grove Village, IL 60007
2. Freight allowed on \$3,500 or more of all products other than Duct Bank Templates, EZ Pull Wiring Harnesses, Econo Whips, and all types of Prefabricated Assemblies
3. Freight on Duct Bank Templates, EZ Pull Wiring Harnesses, all of Econo Whips, Prefabricated Assemblies is negotiated on an individual order basis. If freight requirements are met on orders for these products, any quantity of all other products shown on price sheet, may be Included to become freight allowed.
4. Terms apply on one shipment to one location within the continental USA. For Alaska, Hawaii, Puerto Rico and else where, consult factory.
5. 50% restocking charge plus freight charges both ways, on all products other than specials noted in paragraph 3 & 4 above provided material is in saleable condition based on our inspection. No returns accepted if purchase order is older than 1 year.
6. All types of wiring harnesses including harnesses in all types of flexible conduit, twisted or striped wire, Qwik Duct Custom Templates, pre-fabricated boxes with wiring devices installed and all other prefabricated products are absolutely not returnable.
7. Customer can order any piece quantity.



PATENT PENDING
PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

**Are you a retired electrician with
many years of experience...**

**All your projects around
the house are completed?**

Put your valuable knowledge to good use!

**Sales territories available throughout the U.S.
including Hawaii and Alaska as well as Canada!
Earn an excellent income selling our high quality
made in USA innovative product line that saves
contractors a large amount of money.**

**Earn excellent compensation selling our
innovative made in USA products to distributors
and their customers in your area.**

**Do you have IDEA's for products that help
Do SAFER BETTER FASTER jobs!**

**Call us we'll help patent, develop and if possible
obtain a UL Listing, make it in the USA and pay YOU
an excellent royalty on all sales!**

**Plus, you'll have the satisfaction of making
a valuable contribution to our industry.**



**PATENT PENDING
PATENTED**



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

**730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com**



Buy American Act Letter of Compliance



BUY AMERICAN ACT - applies when the federal government is directly purchasing products or materials for a federal project that are designated as Domestic. Under this act there are two provisions to determine if a product is domestic: 1.) it must be “manufactured*” in the United States; and 2.) the cost of domestic components. (*The Government Accountability Office (GAO) define “manufactured” as the completion of the (end product) in the form required for use by the government to be carried out domestically.)

BUY AMERICAN ACT - requires Federal agencies to procure domestic materials and products. Two conditions must be present for the Buy American Act to apply: (1) the procurement must be intended for public use within the United States; and (2) the items to be procured or the materials from which they are manufactured must be present in the United States in sufficient and reasonably available commercial quantities of a satisfactory quality.

SP Products, Inc. is committed to making it easy as possible to supply our products for projects subject to the Buy American Act requirements.

Currently all products listed in the current catalog* meet the requirements of each act.

* With the exception of PFA4 Adjustable Mud Rings are made in China.

SP Products, Inc. | 730 Pratt Blvd. | Elk Grove Village, IL 60007
info@spproducts.com | www.spproducts.com



PATENT PENDING
PATENTED





LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007
P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595
E: info@spproducts.com • www.spproducts.com

4-Conduit Block

IP19


Patent Pending
UL DWSD



QwikBlock

IP21a



Patent Pending
UL DWSD

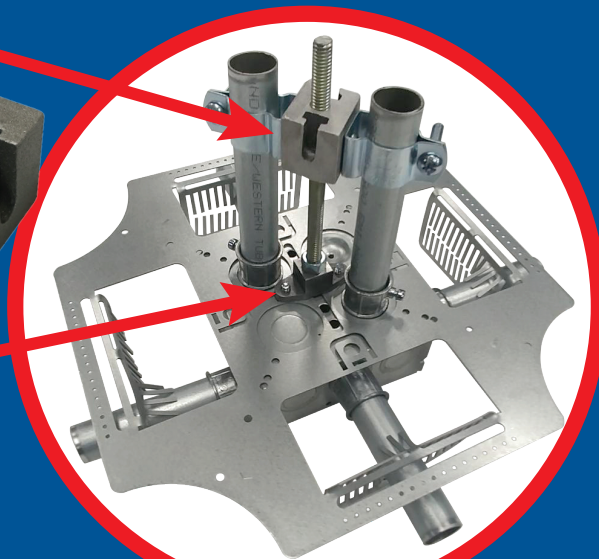

Box Support Rod Cubes

IP20a


Patent Pending



New Products

IP3f

Patent Pending



Long Slip PVC

IP3g


Patent Pending

**Slip
PVC to
RGD**



IP4


Patent Pending



**EZ Raised
Bracket**

IP3e


Patent Pending



PVC Guide

IP2b


Patent Pending



PVC Driver

TE15

Patented



**Conduit
Layout Tool**

IP13gg

Patent Pending



**Flexible Conduit
to RGD**

IP13r-u

Patent Pending



**Long Slip
Bell End Adapter**

IP12p-t

Patent Pending



**Female PVC
Adapter**

Plus More Being Invented for Jobs . . . Call With Your Ideas!

SPPProducts.com | 800-233-8595 | Info@SPPProducts.com